




XKDEFENDER

MULTI-FUNCTION WORK / SECURITY LIGHT

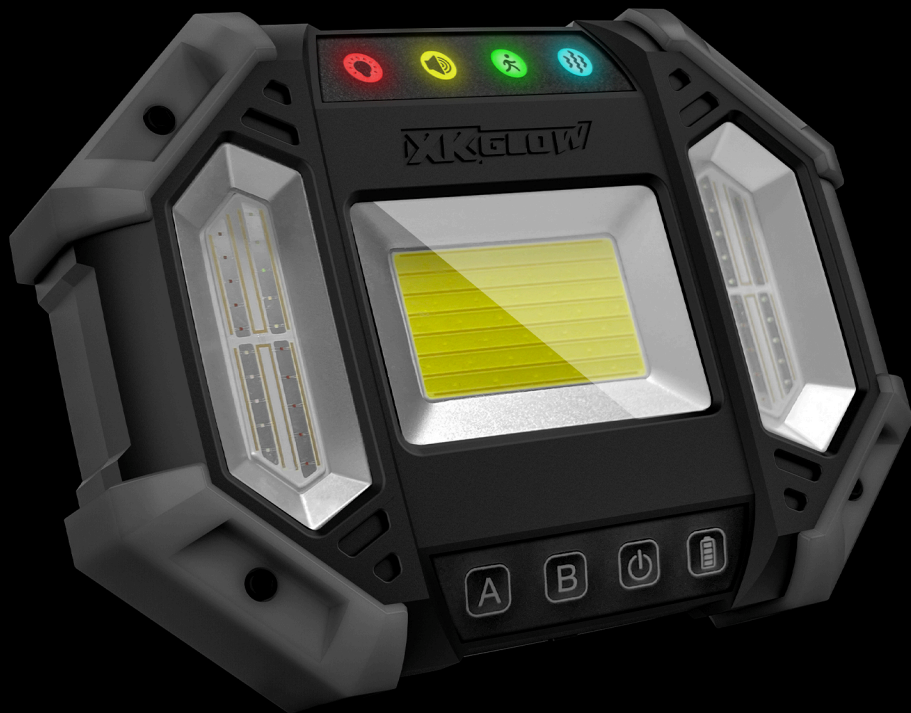

USER MANUAL

LED INDICATORS / BUTTONS



LIGHT
INDICATOR



SIREN
INDICATOR



PROXIMITY
INDICATOR



VIBRATION
INDICATOR



LIGHT
MODES



SECURITY
MODES



POWER
BUTTON



BATTERY
BUTTON

BATTERY LIFE / CHARGING



The XKdefender can be charged via any standard USB-C charger and is fast charger capable. The upper indicator LEDs display the charging status via a purple glow. Each indicator represents 25% of the charge. All four indicators will glow purple once the XKdefender is fully charged. On a full charge, in Full Brightness Mode the XKdefender can get up to 3.5 hours of continuous use. In Half Brightness Mode, this is extended up to 7 hours of continuous use. To display the XKdefender's current battery charge, simply tap the Battery icon.

Should the product need to be stored for an extended period of time, enable Sleep Mode to conserve battery power. To enter Sleep Mode, hold the power button for 3 seconds. The XKdefender will beep twice to confirm Sleep Mode. Hit the power button once to get out of Sleep Mode.





If the light is NOT plugged in to charging cable and is in off status for over 2hrs. It will automatically enter Sleep Mode. In Sleep Mode, the remote and all buttons except the power button will not respond. To wake up the light push the power button. To disable the Auto Sleep Mode, hold A and the battery buttons for 2 seconds. The indicators will flash 2 times and beep 2 times to confirm Auto Sleep Mode is switched off. Repeat this to switch on the Auto Sleep Mode. The indicators will flash 4 times and beep 4 times to confirm Auto Sleep Mode is turned back on. To enable or disable Auto Sleep Mode, the XKdefender must NOT be charging.

AVAILABLE MODES

Use the buttons on the XKdefender or the optional remote to activate the XKdefender. Each security mode will automatically arm 30 seconds after mode selection. When triggered, the XKdefender will alert in the selected mode for 60 seconds. You can hit any button on the XKdefender or the remote to disarm at any time. After the 60 seconds expires, the XKdefender will shut off and automatically re-arm itself. Use button A to select the WHITE light modes or button B to select the security modes.

    **STROBE + SIREN** activated by **PROXIMITY**





When armed and activated by the on-board motion sensor, the red/blue strobe and the siren will activate.

    **STROBE** activated by **PROXIMITY**





When armed and activated by the on-board motion sensor, the red/blue strobe will activate.

    **STROBE + SIREN** activated by **VIBRATION**





When armed and activated by the on-board vibration sensor, the red/blue strobe and the siren will activate.

    **STROBE** activated by **VIBRATION**





When armed and activated by the on-board vibration sensor, the red/blue strobe will activate.

    **WHITE** constant on - **100% BRIGHTNESS**

Hit button A one time to activate Full Brightness Mode. Up to 3.5hrs of continuous use.

    **WHITE** constant on - **50% BRIGHTNESS**

Hit button A two times to activate Half Brightness Mode. Up to 7hrs of continuous use.

    **WHITE** activated by **PROXIMITY**

Hit button A three times to activate White Proximity Mode. XKdefender will light for 60s when motion is detected.

REMOTE PAIRING



The optional remote for the XKdefender is multi-light capable, meaning one single fob can control multiple XKdefender lights at once.

HOW TO PAIR A REMOTE: When the XKdefender is off, press A+B for 3s and release. You will see 4 indicators flashing GREEN. Press any button on the remote. The XKdefender will beep twice to respond. After this, press any button on the XKdefender to exit pairing mode. Pairing will not work in SLEEP mode.

HOW TO UNPAIR A REMOTE: With XKdefender off but not in sleep mode, hold A+B for 7S and release. Indicator LEDs will flash WHITE four times to reset to factory mode and erase all remotes.

Additional remote fobs are available for purchase to pair with one or more XKdefenders.

Warranty	Max Battery Life - 100%	Max Battery Life - 50%
3 year	3.5 hours	7 hours

WARRANTY AND DISCLAIMER

Within three years after the purchase date, the original buyer may return any XKGLOW XKdefender Light that has failed due to a defect in materials or workmanship.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

ADDITIONAL DISCLAIMER TERMS

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.

RETURN/EXCHANGE PROCEDURE

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).