

Installation Instructions for 3-3/8" Electric Programmable Speedometer

Before You Start

- Read instructions completely before installing.
- ALWAYS WEAR SAFETY GLASSES.




General Information

12-volt DC negative (-) ground electrical systems. This electronic speedometer comes pre-calibrated for 16000 pulses per mile. No further calibration is required if:

1. The transmission's speedometer cable take off is 1000 RPM at 60 MPH. Most vehicles meet this requirement. If the vehicle's tire size and/or differential ratio has changed, the speedometer needs to be recalibrated.
2. The vehicle is equipped with a 16-pulse/revolution sender.

If conditions 1 and 2 have not been met, calibrate the electric speedometer using the CALIBRATION process below.

Fig 1. Wiring Diagram

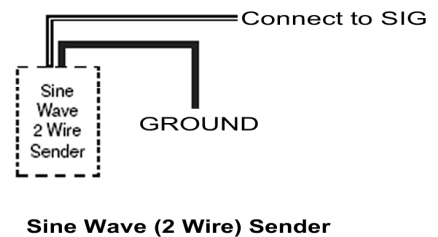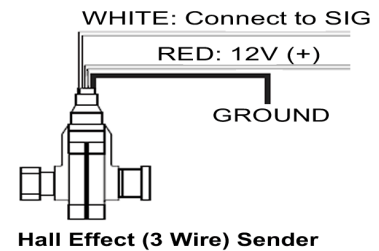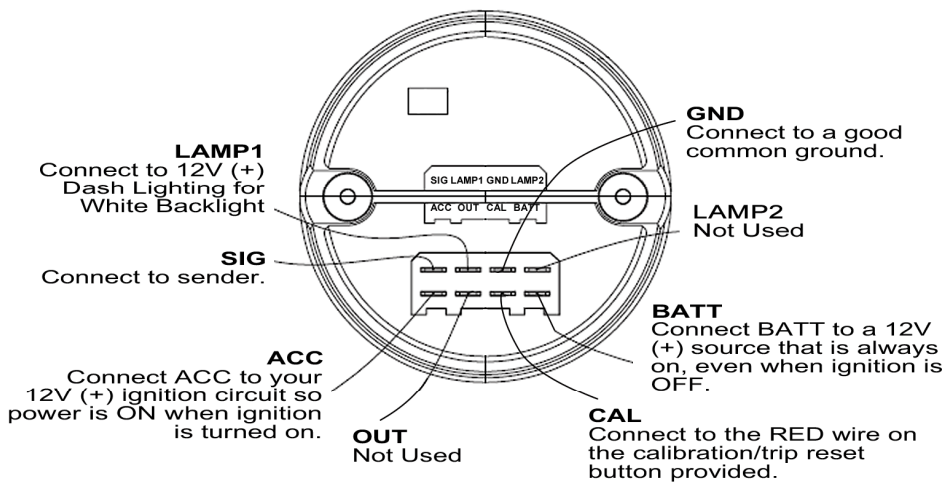

- Install gauge only when engine is cool and ignition is off.
- Make sure all necessary tools, materials, and parts are on hand.
- Disconnect negative (-) battery cable before installing gauge.

Signal Interface

This speedometer is designed to work with both hall effect senders and magnetic pickup sensors. The input level can range from TTL 5V square wave (hall effect) to AC sign wave signals (magnetic pickup). Connect the signal output wire from the sender to the SIG terminal on the gauge.

Always consult the service manual for the vehicle you are working on to ensure proper connection. Incorrect hookup will damage the speedometer and void warranty. Please read these instructions carefully.

Calibration

1. With the ignition off, press and hold the CAL/TRIP button. Turn the ignition on, then release the CAL/TRIP button.
2. The odometer/trip display will indicate CAL to verify that calibration mode has been accessed. The pointer will move to 50% scale.
3. Drive the vehicle EXACTLY one (1) measured mile then stop.
4. Press the CAL/TRIP button again to complete the calibration.
5. If the number of pulses is between 4,000 to 200,000 the odometer/trip display will indicate the actual pulses counted by the speedometer for five (5) seconds. This indicates a successful calibration. The speedometer will return to normal operation automatically.

If the number of PPR is below 4,000 at the end of one mile, the odometer/trip display will show zeros for five (5) seconds after the button is pressed. The calibration will not be updated, and the original calibration will be maintained. Correct the problem and recalibrate the speedometer.

If the number of PPR is above 200,000 at the end of one mile, the odometer/trip display will show zeros for five (5) seconds after the button is pressed. The calibration will not be updated, and the original calibration will be maintained. Correct the problem and recalibrate the speedometer.

Dimmable LED Lighting

This gauge features through-dial, high-definition LED lighting that will not dim when used with standard dash dimmers. A dimmer switch specifically designed for use with this gauge is available separately.

Wiring

Use standard 1/4" blade style crimp connectors to attach the proper wires to the connectors on the back of the gauge.

Use 20 AWG stranded or heavier wire for installation. Route wires away from any moving parts and hot engine components. Secure wires firmly along their route. **Note:** As a safety precaution, the ACC and 12V+ connections should be fused. We recommend using a 1 Amp, 3 AG fast-acting type cartridge fuse.

Calibration/Trip Button Installation

The speedometer includes a remote mount calibration/trip reset button. Connect the BLACK wire on the button to a common ground. Connect the RED wire to the CAL terminal on the speedometer. Mount the remote button in a convenient location.

Odometer and Trip Operation

The speedometer comes with an odometer (ODO) and two trip functions (TRIP 1 and TRIP 2). Press the CALIBRATION/TRIP button multiple times to cycle from ODO to TRIP 1 to TRIP 2. To reset a specific TRIP reading, hold the CALIBRATION/TRIP button for 3 seconds. The Odometer can not be reset.