



Instructions for the Portatree LED Display

WARNING: Only use the supplied cable to connect the Eliminator Super 2000 to the LED Display. Using any other cable may damage the Display or the Eliminator Super 2000.


1. Plug in the LED Display 110 volt wall adaptor. Plug the supplied communication cable into the LED Display and the Eliminator center port.
2. Power up the Eliminator using the AC adaptor supplied and by turning on the power switch on the left-hand side of the Eliminator.
3. Once the self-test sequence is complete and your Eliminator is displaying the Main Menu, use the **DOWN ARROW** key to highlight **UTILITIES**, and then depress (tap) the **STAGE/ENTER** key.
4. Next depress (tap) the **STAGE/ENTER** key until the **LED SIGN** option is displayed. If you do not see the LED SIGN option, then you must call the Portatree Tech Department at 508-278-2199 ext 508. Tech Hours: 8AM to 12PM and 1PM to 5PM - (EST) - M-F
5. Use the **UP ARROW** key to set the **LED SIGN** option to **ON**. Once the **ON** option is displayed, tap the **STAGE/ENTER** key to save the setting.
6. The next option on the screen should be **LED TYPE**. Use the **UP ARROW** key to set this option to **PORTATREE**. Once the **PORTATREE** option is displayed, tap the **STAGE/ENTER** key to save.
7. Before you continue, verify the LED Display power and communication cables are plugged in and the other end of the communication cable is plugged into the center port on top of the Eliminator.
8. Continue tapping the **ENTER** key until you see the message "**Initializing LED Display Please Wait ...**" This message will be displayed for about 8 seconds. During this time, **DO NOT turn off the Eliminator or unplug any adaptors or cables**. Once the initialization is complete, the Eliminator will return to the **MAIN MENU**. The LED Display should now read **SIGN READY**. The sign is now ready for use.

Eliminator Next Gen

2" and 4" Display Setup Instructions

WARNING: Only use the supplied cable to connect the Eliminator Next Gen to the LED display. Using any other cable may damage the display or the Eliminator Next Gen.

1. Plug in the LED Display 110 volt wall adaptor. Connect one end of the supplied display communication cable to the port on the LED display. Connect the other end of the cable to the Eliminator Next Gen LED display port (second port from the left on the top of the unit)
2. Power the Eliminator Next Gen using the AC adaptor supplied with the unit. If on battery power, press and hold the right "STAGE" button on the front of the unit to turn on.
3. Press the Left Arrow Button until "Setup" is displayed
4. Press the "Setup" icon to enter the Setup menu
5. Press the slider to the right of "LED Sign" until it reads "On"
6. Please perform the following depending on your display size
 - a. **2" LED Display:** Press the slider to the right of "Sign Type" until "Portatree" is displayed
 - b. **4" LED Display:** Press the slider to the right of "Sign Type" until "Betabrite" is displayed
7. Press "Return" to save the display settings. The Eliminator Next Gen will display "Initializing Display." The display will go through an initialization sequence. The display will read "Sign Ready" when complete.

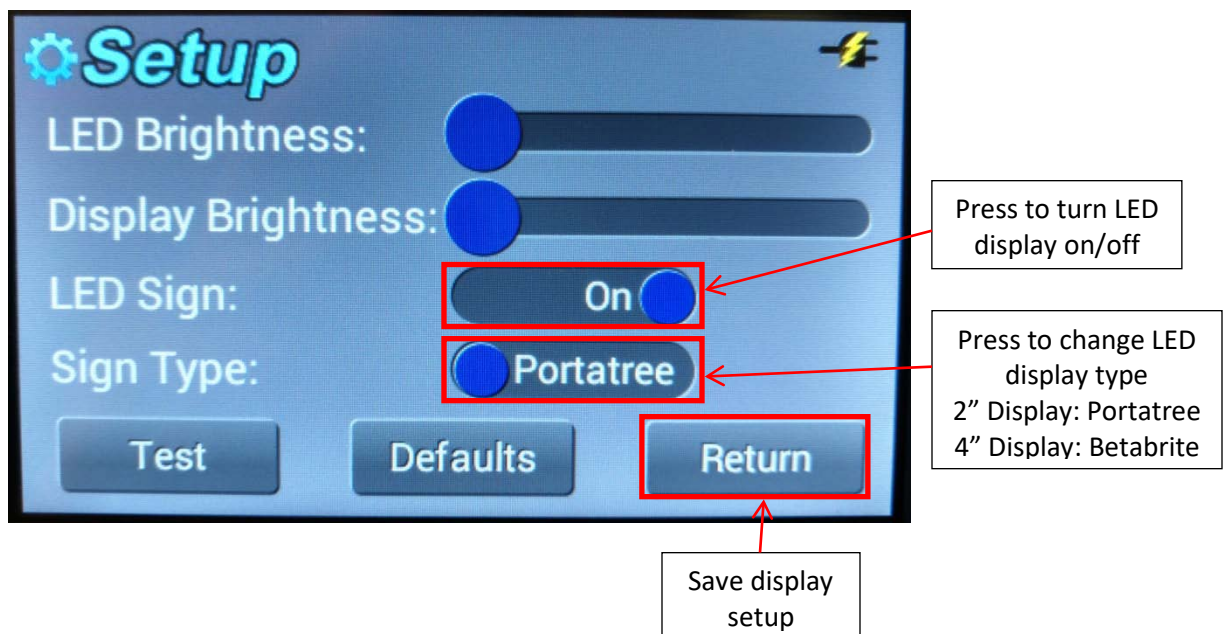

Eliminator Next Gen

2” and 4” Display Setup Instructions

WARNING: Only use the supplied cable to connect the Eliminator Next Gen to the LED display. Using any other cable may damage the display or the Eliminator Next Gen.

1. Plug in the LED Display 110 volt wall adaptor. Connect one end of the supplied display communication cable to the port on the LED display. Connect the other end of the cable to the Eliminator Next Gen LED display port (second port from the left on the top of the unit)
2. Power the Eliminator Next Gen using the AC adaptor supplied with the unit. If on battery power, press and hold the right “STAGE” button on the front of the unit to turn on.
3. Press the Left Arrow Button until “Setup” is displayed
4. Press the “Setup” icon to enter the Setup menu
5. Press the slider to the right of “LED Sign” until it reads “On”
6. Please perform the following depending on your display size
 - a. **2” LED Display:** Press the box to the right of “Sign Type”
Select “Portatree-2”
 - b. **4” LED Display:** Press the box to the right of “Sign Type”
Select “Portatree-4” for new displays
Select “Betabrite” for older displays
7. Press “Return” to save the display settings. The Eliminator Next Gen will display “Initializing Display.” The display will go through an initialization sequence. The display will read “Sign Ready” when complete.

