

Installation Instructions for RP901375 Flexzilla Splicer

How To Repair Hose Using A Splicer

Step 1




Cut the hose at 90° on both sides of the damaged area. Discard the damaged piece.

Step 2



Place the splicer nuts on each end of the cut hose so the threads are facing each other.

Step 3

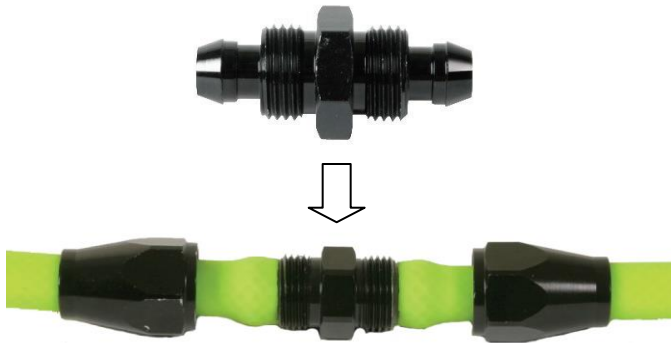

Push ends of hose onto each end of the barb fitting as shown above.

Step 4



Slide the nuts to the barb threads and tighten each nut with wrenches while keeping the barb fitting stationary.