



Seat Cover Installation Instructions



For: Wrangler '92 - '94

Part Number: 29224

DO NOT INSTALL THIS PRODUCT ON ANY VEHICLE OTHER THAN THOSE LISTED ABOVE.

Parts List

Seat Cover - Right, Qty - 1
Seat Cover - Left, Qty - 1

Seat Covers are not waterproof.

Warning:

This product is designed to enhance the appearance of the vehicle. Do not rely in any way on the components of this product to contain occupants within the vehicle, or to protect against injury or death in the event of an accident. This product will not protect the occupants from falling objects. Never operate vehicle in excess of manufacturer's specifications.

Wear seat belts at all times.

Read and follow, precisely, all installation instructions provided when installing this product. Failure to do so may result in a poor fit and could place occupants of the vehicle in a potentially dangerous situation.

Warning: *DO NOT remove the seats from the vehicle to install this product.*

Step One

Orient the Seat Cover on the seat, the Driver's side cover will have an extra opening for the seat release button. Slip the opening in the cover over the seat back and pull the cover down to the seat bottom. Make sure that the security cord on the bottom of the cover goes around and under the outside of the plastic cover of the seat recliner mechanism and tuck the fabric under the mechanism cover.

Step Two

Locate the flap sewn to the inside of the cover at the corner between the seat back and the seat bottom. Tuck the flap between the seat back and the seat bottom.


Pull Cover over
back of seat



Tuck Flap between
Seat Back and Bottom


Step Three

Slide the cover over the seat bottom with the opening in the side of the cover over the seat back release lever. Release the seat back and tilt the seat forward. Unhook the security cord and thread it through the end of the flap. Hook the ends of the cord together. If necessary for a smooth fit, tighten the cord by tying a knot and tuck in any loose fabric.



Unhook Security Cord and Thread through Flap - Reattach

Cord length may be adjusted by tying additional knots to pull fabric up tighter

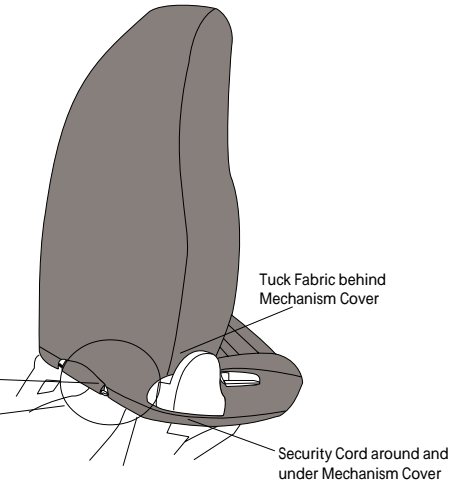

To Fasten Hooks

Slip the two hooks together at right angles to each other.

Turn one hook until they hook to each other.

To secure the hooks, pull them against each other until they click into position.

To Release Hooks: *Turn one hook until it is at right angles to the other and pull apart.*



Step Four

Locate the hook and loop strips sewn to the cover on side of the seat toward the center of the vehicle. Fasten the strips to each other.

LIMITED WARRANTY

We warrant our product to be free from defects in material and workmanship, for the terms specified below, provided there has been normal use and proper maintenance. This warranty applies to the original purchaser only. All remedies under this warranty are limited to the repair or replacement of any item or items found by the factory to be defective within the time period specified.

If you have a warranty claim, first you must call our factory at the number below for instructions. You must retain proof of purchase and submit a copy with any items returned for warranty work. Upon completion of warranty work, if any, we will return the repaired or replaced item or items to you freight prepaid. Damage to our products caused by accidents, fire, vandalism, negligence, misinstallation, misuse, Acts of God, or by defective parts not manufactured by us, is not covered under this warranty.

THE WARRANTY TIME PERIOD IS AS FOLLOWS: ALL "SOFT GOODS" MANUFACTURED BY OUR COMPANY (USING PRIMARILY VINYL, PLASTICS, AND/OR FOAM): ONE YEAR FROM DATE OF PURCHASE.

ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE CREATED HEREBY ARE LIMITED IN DURATION TO THE SAME DURATION AND SCOPE AS THE EXPRESS WRITTEN WARRANTY. OUR COMPANY SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE

Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

For further information or request for warranty work, please contact:

Bestop Inc.
Customer Service
(800)845-3567
(303)465-1755

*All or a portion of this product may be made in China.

Rev. D 1009

29224 2