

11718

90-94 VOLKSWAGEN PASSAT WAGON

12/14/2012

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 2,000 LBS. TRAILER WEIGHT & 200 LBS. TONGUE WEIGHT.



DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY 18050 STABILIZING STRAPS.

** FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY**

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	3/8 - 16 x 1 3/4	HEX BOLT
2	2	3/8-16 X 1 1/2	HEX BOLT
3	4	HFN3816	HEX FLANGE NUT
4	2	3/8"	WASHER
5	2	3/8"	LOCK WASHER
6	2	3/8 - 16	HEX NUT
7	4	M10 - 1.5 x 30 HEX	HEX BOLT
8	4	7/16 LOCK WASHER	HELICAL LOCK WASHER
9	2	3_8 - 16 x 1	HEX BOLT

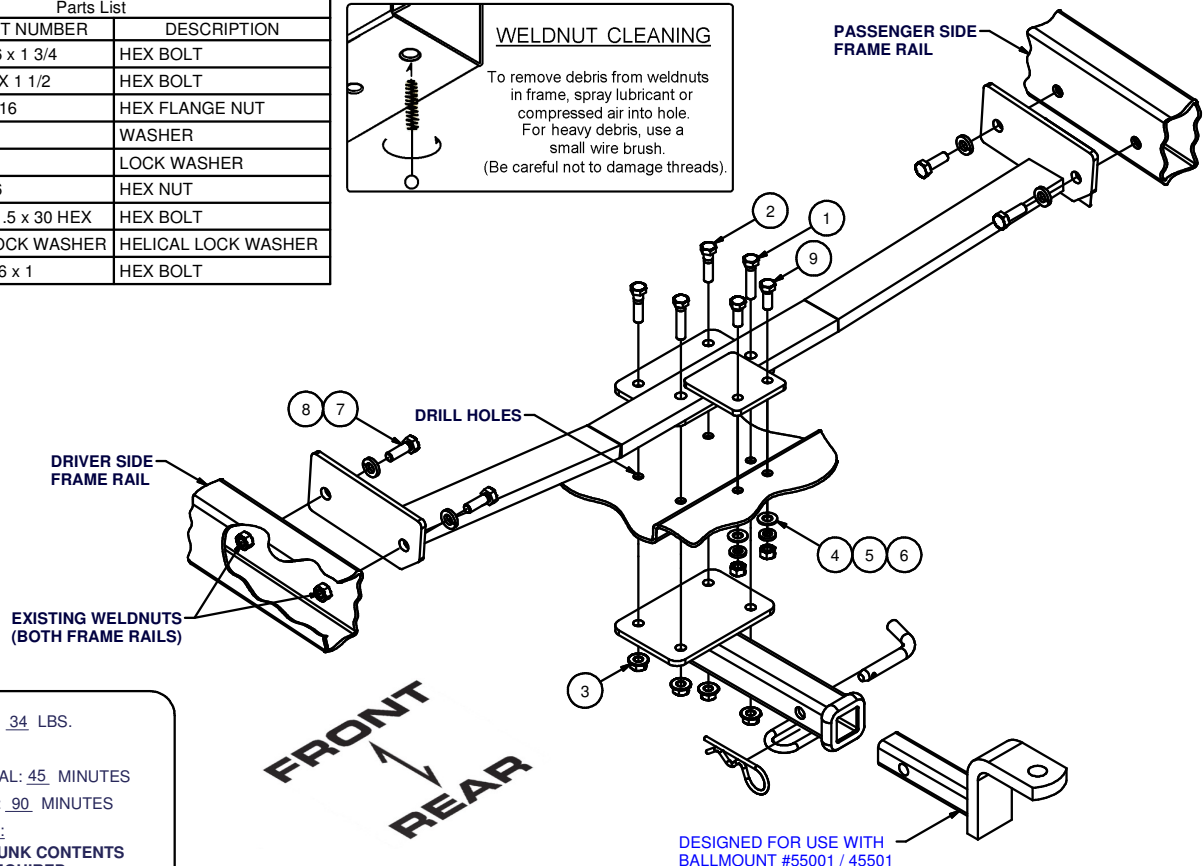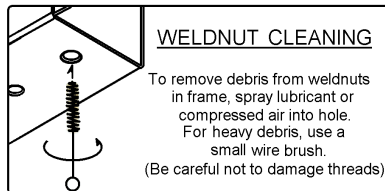

HITCH WEIGHT: 34 LBS.

INSTALL TIME

PROFESSIONAL: 45 MINUTES

NOVICE (DIY): 90 MINUTES

INSTALL NOTES:

- REMOVE TRUNK CONTENTS
- DRILLING REQUIRED
- FASCIA TRIMMING REQUIRED
- SILICONE FASTENERS

INSTALLATION STEPS

1. Remove all contents from trunk. Locate and remove (4) 10mm bolts on the driver and passenger frame rails fastening the rear bumper brackets inside the frame rails.
2. Install the main hitch assembly into place behind the spare tire and between the frame rails with large and small floor plates down against the floor. Bolt the hitch in place with fasteners at points where the 10mm bolts were just removed. Using the hitch as a template drill the trunk pan for 3/8" fasteners as shown.
3. Determine the location of fascia cut out for receiver / safety chain loop clearance. Use a utility knife to cut the hole. CAUTION: It is the installer's responsibility to make cut out match the receiver assembly when assembled.
4. Bolt receiver tube assembly to vehicle using fasteners as shown.
5. Torque 3/8" fasteners to 45 lb-ft, and all 10mm fasteners to 45 lb-ft.
6. Apply silicone sealant around fasteners installed in floor of trunk to seal out water and exhaust fumes.
7. Reinstall contents of trunk removed in step 1.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.

247234