



## Edelbrock Shaft Speed Sensor Kit Catalog # 91115, 91116 INSTALLATION INSTRUCTIONS

**PLEASE** study these instructions carefully before installing your new Edelbrock Shaft Speed Sensor Kit. If you have any questions please contact our Technical Hotline at: 1-800-416-8628, from 7am-5pm, Monday through Friday, Pacific Standard Time.


**DESCRIPTION:** Edelbrock Speed Sensors are Reed type magnetically triggered sensors used for monitoring component speeds such as Engine RPM, Shaft Speeds, Wheel Speeds etc. Sensor state is normally open and closes with passing of trigger magnet creating a digital pulse output signal for use with Qwikdata, QwikData 2 or any data system with digital inputs. Sensor Body is 5/16-24 and will fit most Bell Housings for Input Shaft Speed applications. Mounting Brackets and Driveshaft Speed kits are also available from Edelbrock.

**Note: Sensors will trigger from either north or south pole magnets**


**Kit Contents: #91115**  
1 - Shaft Speed Sensor

**Kit Contents: #91116**  
1 - Shaft Speed Sensor  
2 - Cobalt Magnets

Pin	Function
1	Ground
2	Signal
3	n/c
4	n/c

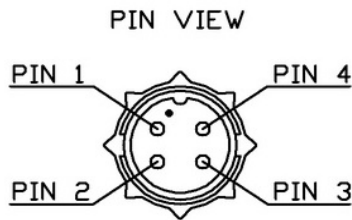

**Recommended Air Gap:** 0.080 to 0.120. Adjustment may be necessary to obtain clean signal..

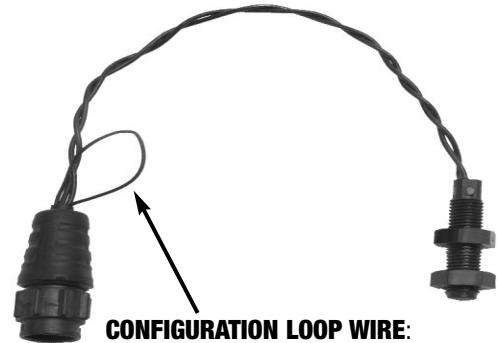

is for use with QwikData 2 data systems. Clip wire for all other applications including original Qwikdata

Catalog #91115, 91116  
Rev. A - 2/12 - MH/CP

Edelbrock LLC • 2700 California St. • Torrance, CA 90503  
Tech Line: (800) 416-8628

©2012 Edelbrock LLC  
Brochure #63-91115



## Edelbrock Shaft Speed Sensor Kit Catalog # 91115, 91116 INSTALLATION INSTRUCTIONS

**PLEASE** study these instructions carefully before installing your new Edelbrock Shaft Speed Sensor Kit. If you have any questions please contact our Technical Hotline at: 1-800-416-8628, from 7am-5pm, Monday through Friday, Pacific Standard Time.


**DESCRIPTION:** Edelbrock Speed Sensors are Reed type magnetically triggered sensors used for monitoring component speeds such as Engine RPM, Shaft Speeds, Wheel Speeds etc. Sensor state is normally open and closes with passing of trigger magnet creating a digital pulse output signal for use with Qwikdata, QwikData 2 or any data system with digital inputs. Sensor Body is 5/16-24 and will fit most Bell Housings for Input Shaft Speed applications. Mounting Brackets and Driveshaft Speed kits are also available from Edelbrock.

**Note: Sensors will trigger from either north or south pole magnets**


**Kit Contents: #91115**  
1 - Shaft Speed Sensor

**Kit Contents: #91116**  
1 - Shaft Speed Sensor  
2 - Cobalt Magnets

Pin	Function
1	Ground
2	Signal
3	n/c
4	n/c

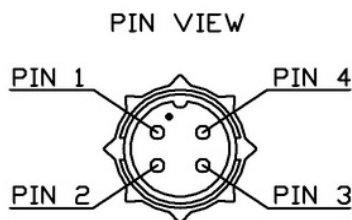

**Recommended Air Gap:** 0.080 to 0.120. Adjustment may be necessary to obtain clean signal..

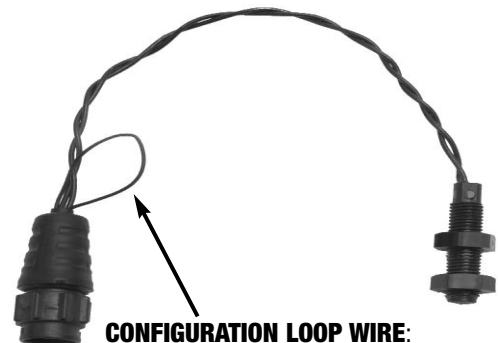

is for use with QwikData 2 data systems. Clip wire for all other applications including original Qwikdata

Catalog #91115, 91116  
Rev. A - 2/12 - MH/CP

Edelbrock LLC • 2700 California St. • Torrance, CA 90503  
Tech Line: (800) 416-8628

©2012 Edelbrock LLC  
Brochure #63-91115