

Must use existing outer metal shells. DO NOT REMOVE FROM CONTROL ARMS!!


Remove old I.D. sleeve and old rubber from the shells Make sure the I.D. of the shells are clean and free of any old rubber


Apply a light coat of grease to the I.D. of the shell Apply a light coat of grease to the I.D., O.D. and the flange Apply a light coat of grease to the O.D. of the new metal sleeve


Install the bushing in the shell and install the sleeve last Apply a light coat of grease to the faces of the thrust washer that contacts the metal surfaces



1131 VIA CALLEJON, SAN CLEMENTE, CA 92673

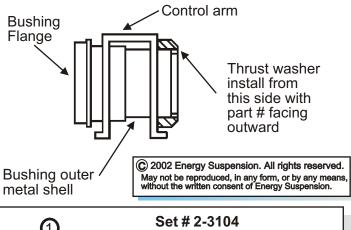

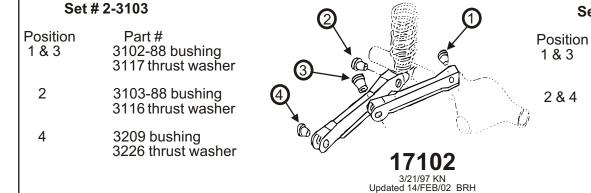



3116 thrust washer

Installation Instructions Set # 2-3103 & Set # 2-3104

Must use existing outer metal shells. DO NOT REMOVE FROM CONTROL ARMS!!

Remove old I.D. sleeve and old rubber from the shells Make sure the I.D. of the shells are clean and free of any old rubber

Apply a light coat of grease to the I.D. of the shell

Apply a light coat of grease to the I.D., O.D. and the flange Apply a light coat of grease to the O.D. of the new metal sleeve

Install the bushing in the shell and install the sleeve last Apply a light coat of grease to the faces of the thrust washer that contacts the metal surfaces



1131 VIA CALLEJON, SAN CLEMENTE, CA 92673

