


Installation Instructions for 60659 Carrier & Pinion Bearing Puller Clamshell Design

With periodic cleaning and maintenance, JEGS bearing puller should provide you with years of service. Always keep threads clean and lubricated with grease or anti-seize.

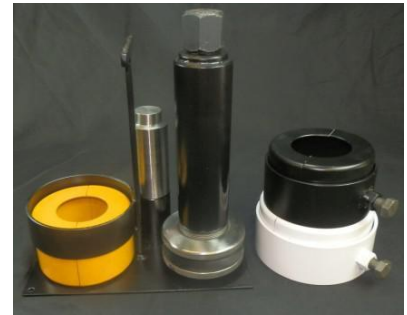

STEP 1

Always place race over side/carrier bearing. Failure to do so may cause damage to the bearing.



STEP 2

Place pin inside bearing



STEP 3

Slide puller over pin.
Adjust bottom ring until it sits firmly on top of race.

STEP 4

Choose the clamshell that best fits your bearing/race. After choosing, place one half over puller as shown and adjust top ring to ensure there is no vertical play inside clamshell. Once that is accomplished, position second half of clamshell around rings.



STEP 5

Slide retainer over clam-shell and hand tighten bolt to keep retainer from moving



STEP 6

Use a 1/2 in. impact and socket or breaker bar and socket to drive pin clockwise into puller. This will cause puller to lift.



1-800-345-4545 jegas.com