



# Owner's Manual

1963-1967 C2 Corvette



## WARNING




**Please read and understand this manual before installing your EPAS kit.**

The installation of this system should be done by a professional mechanic or a very knowledgeable amateur. You will be cutting and splicing your steering column, therefore EPAS Performance will not be held responsible for any malpractice. Caution should be taken when installing the electric motor: no impacts, shocks or hammering should be done to the unit. For aesthetic reason, you may choose to paint the assembly either in black or the color of your steering column to conserve the original look.

For a complete understanding, we strongly suggest to read this owner's manual prior to any installation. **Should you have any questions or concerns feel free to contact us at (941) 893-5427 or visit our website for installation videos.**

EPAS Performance wishes you thousands of enjoyable miles with your new Electric Power Steering!



### Required tools:

- Drill
- Right angle grinder, with cutting disc
- Goggles
- Measuring tape
- Steering wheel removing tool
- You will also need hand tools to remove the steering column

Disconnect battery. Remove steering wheel and column.

On the column tube, make a cut at 10 ¾" from the steering wheel side, measuring down.

On the steering shaft, make a cut at 9 ½", measuring from the steering wheel splines downwards.

On the cut end of the steering shaft, a ¾" DD will need to be made at 1 ½" upwards.

\*NOTE: There are two different turn signal assemblies that were available for the C2. If you have the CABLE operated model, you will need to relocate the switch, just above the brake pedal assembly with a self tapping screw. \*

The shaft (provided by EPAS) with the ¾" DD coupler welded to it, you will need to run this through the firewall bearing and plate, into the 1" DD. **(Image A)**

A slot will need to be made ½" wide, 1 ¼" long, 3 ½" from the cut end, on the bottom side of the tube in the trough.

Place the aluminum coupler (provided by EPAS) on the cut end of the column tube, attach the EPAS motor. Only tighten set screws enough to hold to tube and motor on. **(Image B)**

A universal brake light switch (provided) & bracket will need to be installed. **(Image C)**

Image A

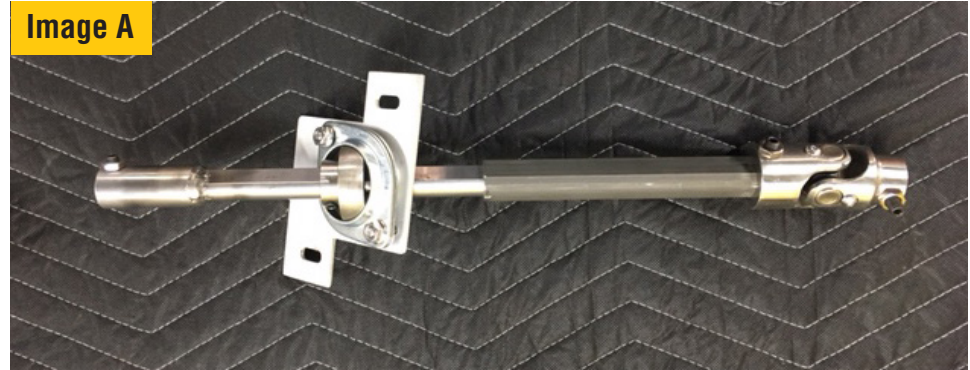


Image B



Image C





Install the ujoint on the gearbox, pulling the 3/4" DD shaft through the firewall, leaving the firewall plate and bearing bolts loose. **(Image D)**

The control unit can be mounted on the transmission tunnel. A 7/8" hole will need to be drilled in the firewall, underneath the windshield wiper motor. This is where the battery power wire will run through. Be sure to install the provided grommet.

Install the EPAS motor, with column, be sure to place above the parking brake rod. Align the motor on to the welded coupler on the 3/4" DD shaft that is through the firewall.

Install the dash plate with the 2 column clamp bolts, Install the set screws loose.

Clock the motor to about 2:00 or until it is free of obstructions. Tighten all set screws.

Install the steering shaft and turn signal assembly.

Adjust turn signal assembly to desired height. Be sure to check tightness of set screws.

Hook up horn button and turn signals. Connect the 4way connector on the motor to the module. Blue connector on motor to module.

Reinstall the steering wheel and the dash panels.

Tighten firewall plate and it's bearing.

Image D


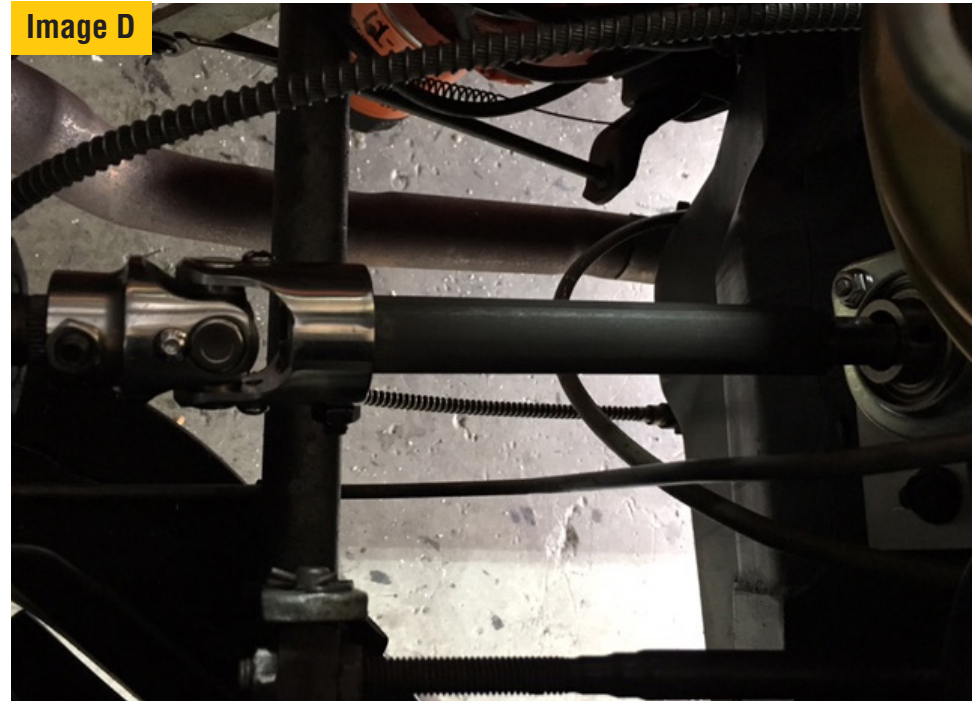


Image E



Image F

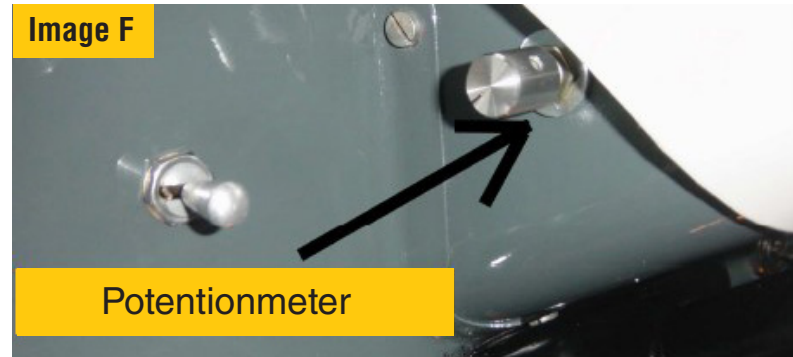

Potentiometer

The potentiometer and control module can be installed in any location that is convince for you. Install the ignition wire, connect to motor to the module, and battery hot wire to the starter solenoid.  
**(Image F & G )**

Install steering wheel and connect battery.  
Turn on the potentiometer and a small “click” will emit.  
You are now ready to enjoy power steering and drive with ease!

Image G



# TERMS AND CONDITIONS

## LIABILITY LIMITATION AND RELEASE

We are pleased you have chosen to purchase one of our automotive specialty equipment items. Our products are carefully designed to combine performance, durability and safety, and to work in concert with the vehicle's original equipment. As they are specialty products, however, and as both performance and safety are paramount concerns, we urge our customers to consider having the products professionally installed.

We caution the purchaser that the enhancement provided by the specialty equipment item may change the handling characteristics of the vehicle. We urge the purchaser to carefully familiarize him/herself with the vehicle's performance characteristics with the new equipment. This should be done in a safe environment and in a safe manner.

We have no control over the quality or correctness of equipment installations performed by others, nor can we control the uses (in manner or environment) products are subjected to. Accordingly, liability on the part of EPAS Performance LLC is limited to the terms of its Express Limited Warranty.

A decision by the purchaser to retain and install the item purchased will be deemed acceptance of the specific terms of this Liability Limitation and Release.

The purchaser expressly releases and waives any claim against us for any consequential damages or injury that may arise from the use, or any malfunction, of its product. This Liability Limitation and Release binds the original purchaser, all successors in interest, and all persons to whom the product may subsequently be transferred; and the purchaser agrees to make this limitation known to all such persons. This Liability Limitation and Release is part of the consideration for the sale of the product.

This Liability Limitation and Release is governed by the laws of the State of Florida, United States of America. Any dispute regarding its terms or application is subject to arbitration in the State of Florida at the request of either party to the sale.

## WARRANTY

This warranty is limited to the repair or replacement of the defective part only; the warranty specifically excludes labor or consequential damages or injury. The decision as to whether the defective part will be repaired or replaced will rest solely with the manufacturer. The warranty period begins on the date the product is shipped to you.

Full 5-year warranty nontransferable.

This warranty is void if the product is or was improperly installed, abused in any manner. Road or accident damage is not covered.

To make a claim under this warranty, call EPAS Performance to return the defective product, shipping or postage prepaid. Please include a copy of the original purchase invoice and a note describing the circumstances of the failure or malfunction.

This warranty is governed by the laws of the State of Florida, United States of America. Any dispute regarding the coverage of this warranty, its application or terms is subject to arbitration in the State of Florida.

If the purchaser disagrees with any of the terms of this warranty, please return the purchased item within three (3) business days of receipt. A decision by the purchaser to retain and install the item purchased will be deemed acceptance of the specific terms of this warranty.

## RETURN POLICY

1. If your shipment arrives in a damaged condition, please notify the carrier immediately.
2. Inspect your order carefully upon receipt. If items are missing, you must contact us within five (5) working days.



**EPAS PERFORMANCE**  
**1400 Commerce Blvd, Suite A**  
**Sarasota, FL 34243**

1-941-893-5427  
1-800-372-7611

**[www.EPASPerformance.com](http://www.EPASPerformance.com)**  
Visit our website for installation videos.

