

Warning: The K&N Drycharger included with this kit must be installed on the K&N air filter when used with a K&N Typhoon Cold Air Intake System. The K&N Typhoon Intake System is a performance product that can be used safely during mild weather conditions. During harsh and inclement weather conditions, you must convert your Cold Air Intake System to a short ram configuration, or return your vehicle to the stock OEM airbox and intake tract configuration. Failure to follow these instructions can void your warranty.

INSTALLATION INSTRUCTIONS

69-8606

Scion/Toyota

2003-07 xA

L4-1.5L


1999-00 Yaris

L4-1.3L

**NOTE: E.O.# D-269-30
APPLIES TO 2003-05 xA**

TOOLS NEEDED:

Flat Blade Screw Driver
Phillips Screw Driver
3mm Allen Wrench
Ratchet
Extension
10mm Socket
Cutting tool

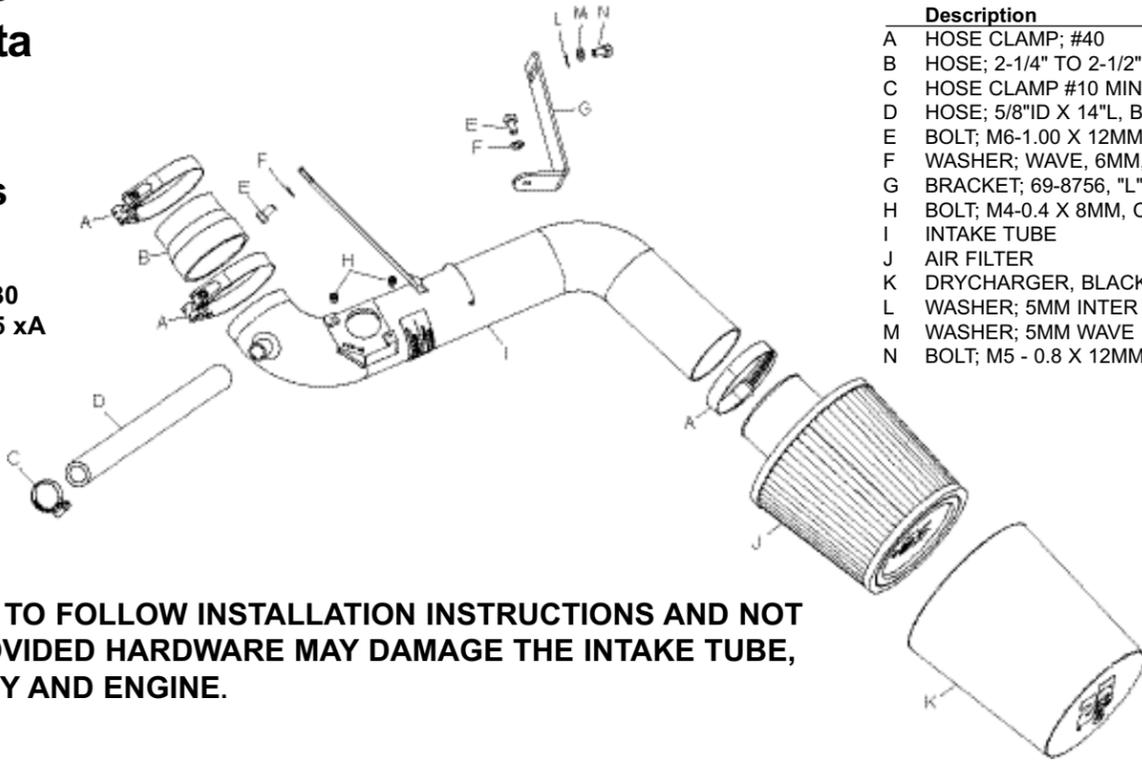

Parts List

Description	Qty.	P/N
A HOSE CLAMP; #40	3	08554
B HOSE; 2-1/4" TO 2-1/2" X 2"L, STEP; BLK	1	08476
C HOSE CLAMP #10 MINI	1	08411
D HOSE; 5/8"ID X 14"L, BLACK	1	084083
E BOLT; M6-1.00 X 12MM, HEX, SS	2	07727
F WASHER; WAVE, 6MM, SS	2	08277
G BRACKET; 69-8756, "L" FB/PC STL	1	26652
H BOLT; M4-0.4 X 8MM, C/H/A	2	07733
I INTAKE TUBE	1	27164
J AIR FILTER	1	KRU4950E
K DRYCHARGER, BLACK	1	971001DK
L WASHER; 5MM INTER STAR LOCK	1	07724
M WASHER; 5MM WAVE	1	08268
N BOLT; M5 - 0.8 X 12MM B/H, SS	1	07734

NOTE: FAILURE TO FOLLOW INSTALLATION INSTRUCTIONS AND NOT USING THE PROVIDED HARDWARE MAY DAMAGE THE INTAKE TUBE, THROTTLE BODY AND ENGINE.

TO START:

1. Turn the ignition OFF and disconnect the vehicle's negative battery cable.



2. Remove the engine cover which is secured by 4 bolts as shown.



3. Disconnect the mass air sensor electrical connection as shown.



4. Using a flat blade screwdriver unclip the wire harness as shown.



5. Remove the tape that binds the mass air sensor wire harness to the vacuum switching valve wire harness as shown.



6. Use a flat blade screwdriver to unclip the vacuum switching valve from the side of the air cleaner assembly as shown.

NOTE: On 2006 and later vehicles the vacuum switching valve may be held on with a screw.



7. Disconnect the crank case vent hose from the stock intake tube as shown.



8. Unclip the vacuum hose from the crank case vent hose as shown.



9. Disconnect the crank case vent hose from the cam cover, then, remove the crank case vent hose as shown.




10. Loosen the hose clamps at the throttle body and at the air cleaner assembly, then, remove the stock intake tube as shown.



11. Release the clamps on the upper air cleaner assembly, then remove the upper air cleaner assembly as shown.



12. Remove the bolt that secures the air inlet duct as shown.

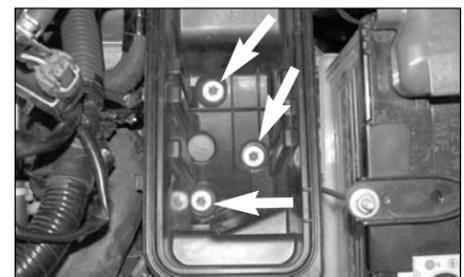

13. Remove the three screws that secure the lower air cleaner assembly as shown.



14. Pull upwards to remove the lower air cleaner assembly as shown.


Note: K&N recommends that customers do not discard factory intake.



15. Loosen the battery hold down bracket and slide the battery as far towards the fender as possible.




16. Using a cutting tool, trim the plastic battery tray to mirror the inner fender as shown.

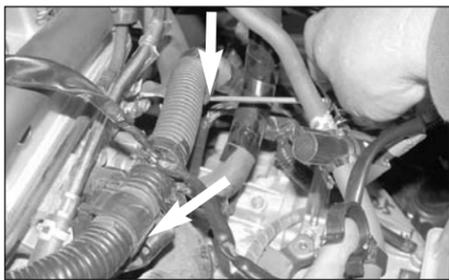

17. Unclip the two plastic wire harness clips to gain more slack for the mass air sensor electrical connection as shown.



18. Raise the vehicle up and support it with jack stands, then, remove the front driver side tire as shown.

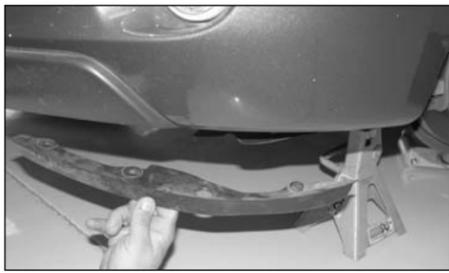


19. Remove the plastic air dam which is secured by three bolts as shown.



20. Remove the two bolts that secure the inner fender valance, then, lower the valance downward as shown.



21. Install the provided "L" bracket onto the stock air cleaner mounting hole using the provided hardware as shown.

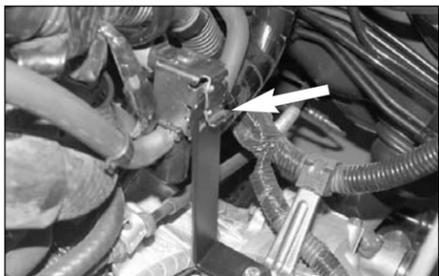

22. Slide the vacuum switching valve onto the "L" bracket as shown.

NOTE: On 2007 and later vehicles, use the provided screw, star washer, and flat washer to attach the vacuum switching valve to the bracket.



23. Install the silicone step hose and hose clamps onto the throttle body and tighten as shown.




24. Remove the mass air sensor from the upper air cleaner assembly as shown.



25. Install the stock mass air sensor into the K&N Typhoon cold air tube and secure with the provided hardware as shown.



26. Slide the K&N Typhoon cold air tube into the engine compartment as shown.

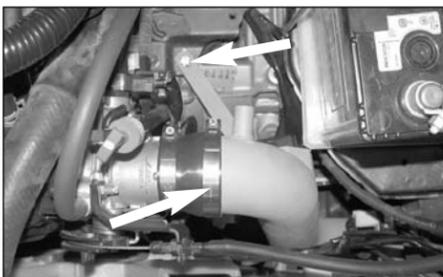


27. Slide the end of the tube into the silicone hose on the throttle body, then secure the bracket to the air cleaner mounting hole using the provided hardware as shown but do not tighten at this time.



28. Reconnect the mass air sensor electrical connection using the provided hardware as shown.



29. Adjust the tube for best fit then tighten the bracket and the hose clamp as shown.

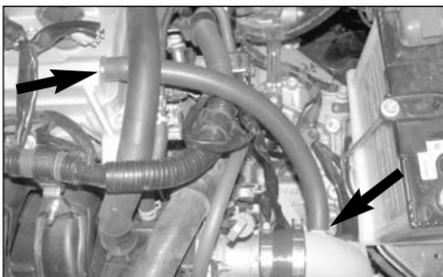

30. Install the provided silicone hose onto the vent on the K&N intake tube, then, connect the other end to the vent on the cam cover along with the provided hose clamp.




31. Install the K&N Drycharger onto the K&N air filter as shown.




32. From underneath the vehicle pull the inner fender valance down, then, slide the air filter onto the cold air tube and secure with the provided hose clamp.

33. Reverse the removal process and secure the inner fender valance.

34. Re-install the front tire and torque to factory specs.

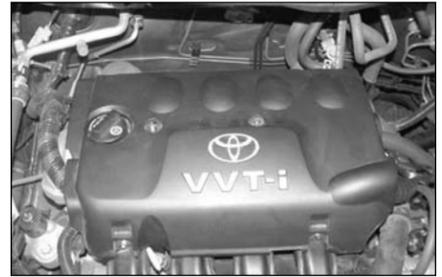

35. Install the engine cover back onto the vehicle.

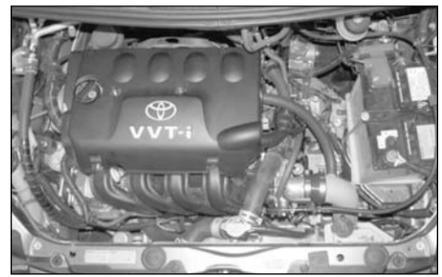

36. Reconnect the negative battery cable and double check that everything is tight and properly positioned before starting the vehicle.

37. The C.A.R.B. exemption sticker, (attached), must be visible under the hood, so that an emissions inspector can see it when the vehicle is required to be tested for emissions. California requires testing every two years, other states may vary.

38. It will be necessary for all Typhoons to be checked periodically for realignment, clearance and tightening of all connections. Failure to follow the above instructions or proper maintenance may void warranty.

ROAD TESTING:

1. Start the engine with the transmission in neutral or park, and the parking brake engaged. Listen for air leaks or odd noises. For air leaks secure hoses and connections. For odd noises, find cause and repair before proceeding. This kit will function identically to the factory system except for being louder and much more responsive.

2. Test drive the vehicle. Listen for odd noises or rattles and fix as necessary.

3. If road test is fine, you can now enjoy the added power and performance from your kit.

4. K&N suggests checking the Air Filter element periodically for excessive dirt build-up. When the element becomes covered in dirt (or once a year), service it according to the instructions on the Recharger service kit, part number 99-5000 or 99-5050.

FREE K&N DECAL To register your warranty, please see us online at knfilters.com/register. FREE K&N DECAL