

March Performance

P.N. 20721


mount Relocator with a
 5/16 x 7/8 Socketcap

Alt. Relocator

3/8 x 1" socket cap

Mount Alt. to ear using
 a 3/8 x 3 1/2 socket cap
 use a .950 spacer in rear of Ear
 and a 3/8 locknut

Locknut 3/8 x 3 1/2 S.C.

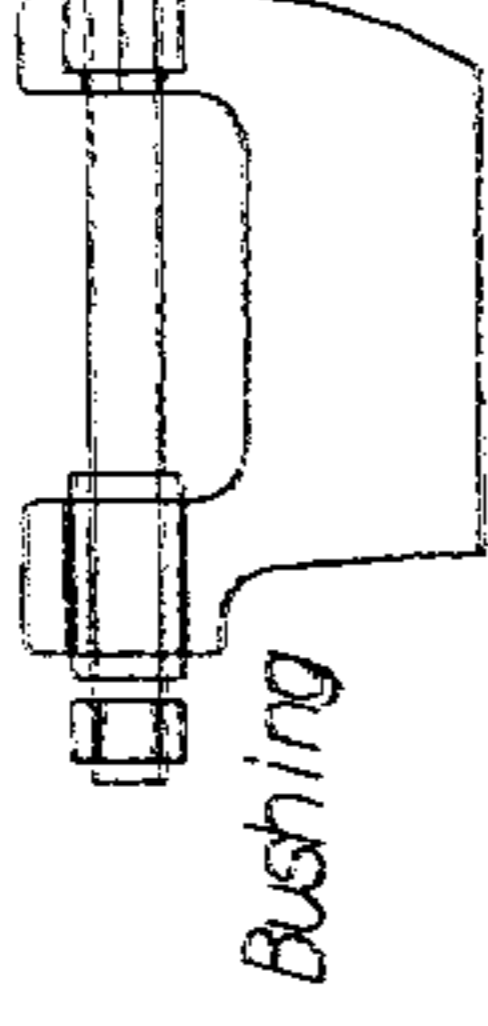

7" ROD

Inner bolt hole
 Use a 3/8 x 2 1/4
 Socketcap

Mount Rod to Bracket
 with a 3/8 x 2 3/4 socket cap
 Use a 1.330 spacer between
 the rod and bracket into the counterbore

MARCH INWARD MOUNT BRACKET

Bolt Sizes

20729=	47	1/2
20730=	53	8
20731=	53	8
20732=	54	8
20725=	46	5
20726=	53	
20727=	53	
20728=	51	

