






Part # 11233.10

460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

LED License Plate Bolts

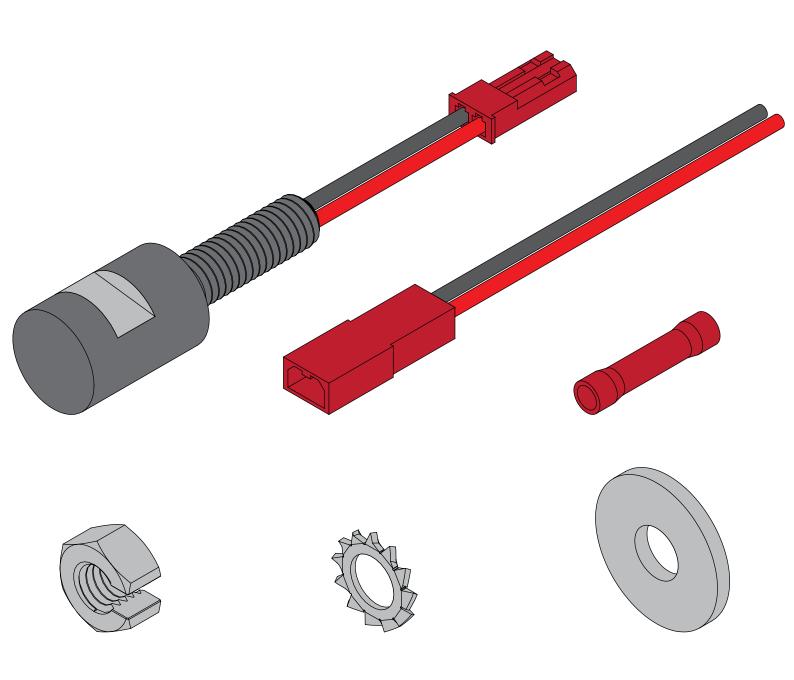

Components

1		License	DIata	Dal+
Ι.	LLU	LICEL 19E	riule	DOIL

- 2. Male Connector
- 3. Butt Connector

2)	1	N.	14	Slit	Nh	1+
Z)	4.	ıv	IO	OIII	IΝU	וג

- 5. M6 Lock Washer
- 6. M6 Flat Washer

OMIX-ADA® TECHNICAL SUPPORT

PHONE: M-F 8am - 5pm EST 1-800-449-6649 | EMAIL: techsupport@omix-ada.com

FOR WARRANTY INFORMATION VISIT: www.Omix-Ada.com









460 HORIZON DR. SUITE 400 | SUWANEE, GA 30024 | PHONE: 770-614-6101 | FAX: 770-614-6069 | info@omix-ada.com

LED License Plate Bolts

- 1. Cut and strip license plate light wiring two inches from plug.
- 2. Using supplied butt connector splice red wires from both supplied Male Connectors into positive wire from license plate wiring.
- 3. Using supplied butt connector splice black wires from both supplied Male Connectors into negative wire from license plate wiring.

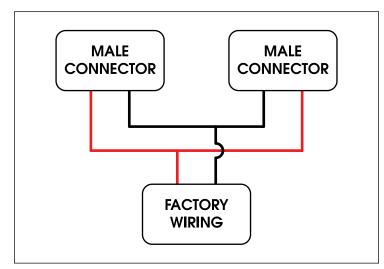

4. Slide supplied M6 Flat Washer and M6 Lock Washer over female plug on LED License Plate Bolt and install M6 Slit Nut over wires.

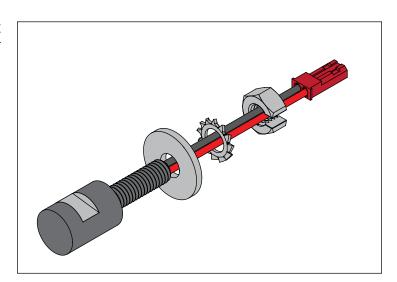

5. Connect LED License Plate Bolts to the spliced Male Connectors. Turn on lights and aim correctly at license plate.

