
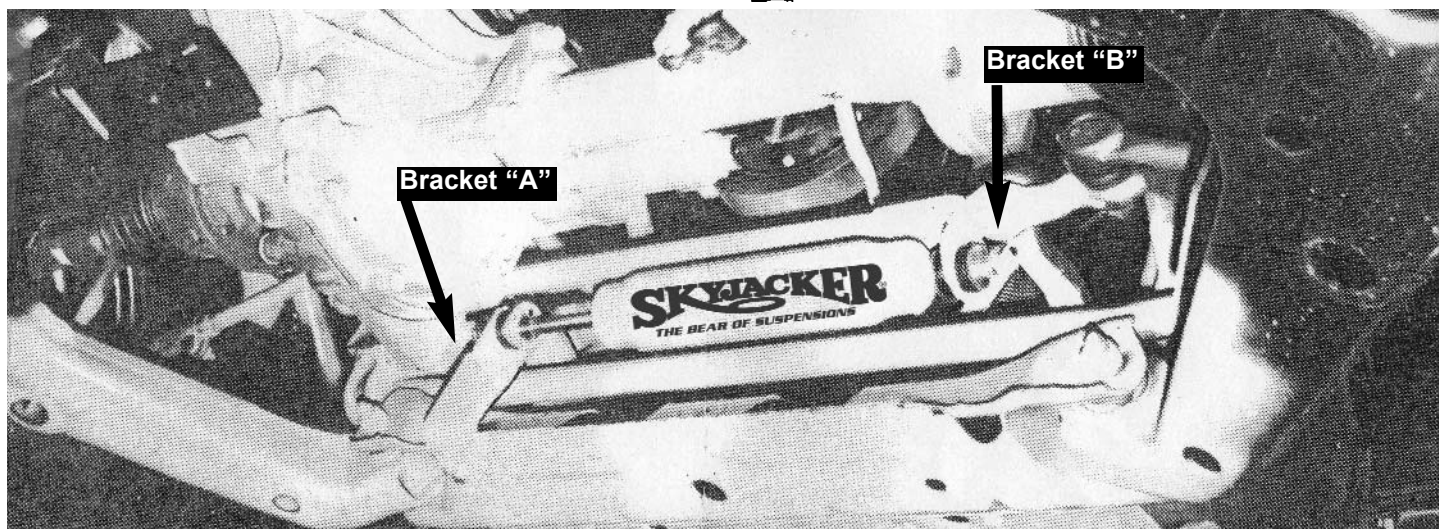


| Part # | Description | Qty. |
|--------------|-----------------------------|------|
| 7800 | WHITE STEERING DAMPER | 1 |
| 83016 | MAIN BRKT FOR 88> GM IFS | 1 |
| 83037 | UNIVERSAL TIE ROD BRACKET | 1 |
| 916X112FTB | 9/16 X 1 1/2 FINE THRD BOLT | 1 |
| 516X114FTB | 5/16 X 1 1/4 FINE THRD BOLT | 1 |
| 516X114X134U | 5/16 X 1 1/4 X 1 3/4 U-BT R | 2 |
| 916FTN | 9/16-18 NYLON INSERT LOCKNU | 1 |
| 516FTN | 5/16-24 FINE N/I LOCK NUT | 1 |

| Part # | Description | Qty. |
|---------------|-----------------------------|------|
| 516CTN | 516-18 COARSE N/I LOCK NUT | 4 |
| 12USSW | 1/2 USS WASHER | 1 |
| 516SAEW | 5/16 SAE WASHER | 5 |
| STEM BUSH-SST | STEM BUSHING-STEERING STAB. | 4 |
| 142120 | STAB WASH PKG - P889/145098 | 2 |
| B10RS | RED BOOT | 1 |
| BTIE | RED BOOT TIE | 1 |
| HSS | HYDRO SHOCK DECAL | 1 |

1. Park the vehicle on level ground and place the wheel in a straight forward position. Set the emergency brake and block the rear tires.
2. Remove skid plate that is mounted between cross member and behind differential housing. (If equipped)
3. Place stabilizer bracket "A" against frame cross member as shown. Line up holes using 9/16" bolt, washer, and nut. Tighten securely.
4. If your truck does not have a skid plate, skip to step #5. If your truck has a skid plate, you will put the 2nd bolt in bracket "A" after you finish all other steps and you are reinstalling the skid plate. Using original bolt through skid plate, bracket "A" and into threaded hole. Use two washers to shim other bolt in skid plate.
5. If your truck does not have a skid plate, attach bracket "A" with a 5/16" bolt, washer, and lock nut.
6. Attach stabilizer to bracket "A" as shown, using bushings and hardware supplied.
7. Attach bracket "B" to stabilizer as shown, using bushings and hardware supplied. Extend stabilizer shaft exactly half way out toward passenger side of vehicle as shown and place bracket "B" against tie rod. Fasten with U-Bolts and nuts.
8. Turn wheels left to right and check all components for adequate clearance. Re-tighten all hardware after the first 100 miles and periodically there after.

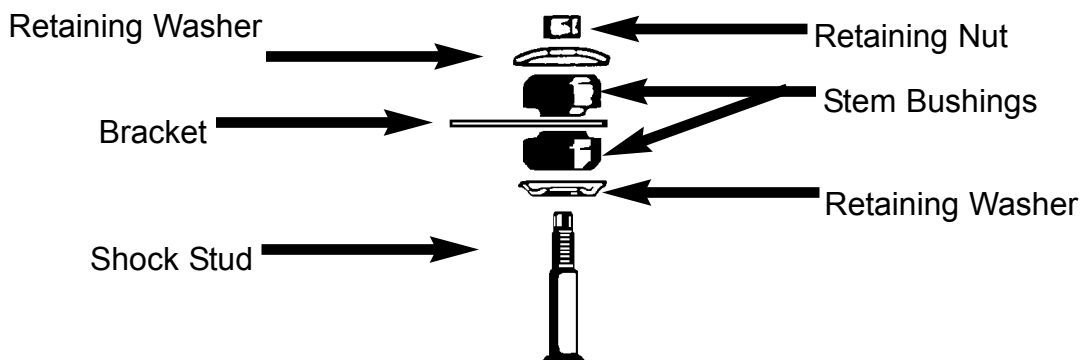

JESUS CHRIST DIED FOR YOU

John 3:16

For God so loved the world that He gave His only Son, so that everyone who believes in Him should not perish, but have everlasting life.

Romans 3:23

For all have sinned; all fall short of God's glorious standard.

Psalms 18:2

The Lord is my Rock, my fortress, and my savior; my God is my Rock, in whom I find protection. He is my shield, the strength of my salvation, and my stronghold.

STEPS TO ACCEPTING JESUS CHRIST AS YOUR PERSONAL SAVIOUR

God, I come to You admitting I have sinned against You and I need you to take control of my life. The Bible says anyone who calls on the name of the Lord will be saved. I am calling on You, Jesus. I ask that You come live in my heart and be the Lord over my life today. I do believe You died on the cross for me and came back to life to give me life!

Romans 10:9-10 says that if I confess with my mouth that Jesus is Lord and believe in my heart that God raised Him from the dead, I will be saved. Because it is by believing in your heart that you are made right with God, and it is by confessing with your mouth that you are saved.

Thank You, Lord Jesus for a new life in You!
Now, go and tell somebody about your
new life in Jesus.

