

Ford Dual Steering Stabilizer Part# 7240

Part #	Description	Qty.
7800	WHITE STEERING DAMPER	2
83540	UNIVERSAL DAUL MAIN B,FORD	1
83541	UNIVERSAL TIE ROD B,FORD	1
38X614X4U	3/8 X 6 1/4 X 4 U-BOLT SQ	1
516X114X134U	5/16 X 1 1/4 X 1 3/4 U-BT R	2
38CTN	3/8-16 COARSE N/I LOCK NUT	2
516CTN	516-18 COARSE N/I LOCK NUT	4


Part #	Description	Qty.
38SAEW	3/8 SAE WASHER	2
516SAEW	5/16 SAE WASHER	4
STEM BUSH-SST	STEM BUSHING-STEERING STAB.	8
142120	STAB WASH PKG - P889/145098	4
B10RS	RED BOOT	2
BTIE	RED BOOT TIE	2
HSS	HYDRO SHOCK DECAL	2

- 1. Place wheels in a straight forward position.
- 2. Install bracket "A" to inside of frame on passenger side above tie rod assembly and mount using large square u-bolt. Twist bottom of bracket forward then tighten nuts on u-bolt.

NOTE: On '92-'96 F-350 models, bracket must either be tack welded in place or drill 2 - 3/8" holes through frame using 2 of the holes in the bracket as a template and bolt to frame.

- 3. Attach both stabilizer barrel ends to bracket "A" using bushings and washers provided. Install nut provided and tighten.
- 4. Place boots on stabilizers. Attach bracket "B" to stabilizer as shown, using bushings and washers provided. Install nut provided and tighten.
- 5. Extend both stabilizer piston rods 4.44"(exactly half-way out) and place bracket "B" against drag link as shown and secure with u-bolts, washers, and nuts.
- 6. Turn wheels fully to right and to left making sure that no interference occurs and that stabilizers do not top or bottom out. Make adjustments as needed.
- 7. Re-check all hardware for tightness after 100 miles and check periodically thereafter and after every offroad use.

On F-350 vehicles with 6" or more lift, the U-Bolt supplied for the frame bracket will not work. The bracket will need to be moved further down on the frame. Place the bracket in the desired position on the frame and weld in place.

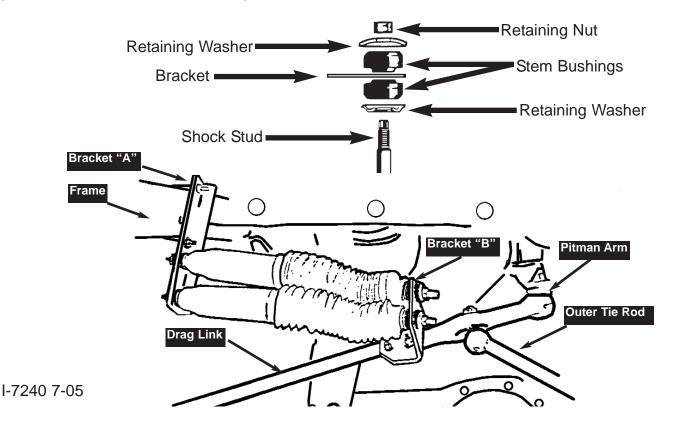

JESUS CHRIST DIED FOR YOU

John 3:16

For God so loved the world that He gave His only Son, so that everyone who believes in Him should not perish, but have everlasting life.

Romans 3:23

For all have sinned; all fall short of God's glorious standard.

Psalms 18:2

The Lord is my Rock, my fortress, and my savior; my God is my Rock, in whom I find protection. He is my shield, the strength of my salvation, and my stronghold.

STEPS TO ACCEPTING JESUS CHRIST AS YOUR PERSONAL SAVIOUR

God, I come to You admitting I have sinned against You and I need you to take control of my life. The Bible says anyone who calls on the name of the Lord will be saved. I am calling on You, Jesus. I ask that You come live in my heart and be the Lord over my life today. I do believe You died on the cross for me and came back to life to give me life!

Romans 10:9-10 says that if I confess with my mouth that Jesus is Lord and believe in my heart that God raised Him from the dead, I will be saved. Because it is by believing in your heart that you are made right with God, and it is by confessing with your mouth that you are saved.

Thank You, Lord Jesus for a new life in You! Now, go and tell somebody about your new life in Jesus.

