


Ford Ranger/Broncoll/Explorer Dual Steering Stabilizer Part# 7250


Part #	Description	Qty.
7900	WHITE STEERING DAMPER	2
83540	UNVRSL DAUL MAIN B,FORD	1
83032	BACKING BRKT FOR 7150,7250	1
83098	TIE ROD BRACKET FOR 7250	1
516X1X134U	5/16 X 1 X 1 3/4 U-BOLT RD	2
516CTN	516-18 COARSE N/I LOCK NUT	4
516SAEW	5/16 SAE WASHER	4
716X4FTB	7/16 X 4 FINE THREAD BOLT	2

Part #	Description	Qty.
716X112FTB	7/16 X 1 1/2 FINE THRD BOLT	2
716FTN	7/16-20 FINE N/I LOCK NUT	2
716SAEW	7/16 SAE WASHER	2
STEM BUSH-SST	STEM BUSHING-STEERING STAB.	8
142120	STAB WASH PKG - P889/145098	4
B10RS	RED BOOT	2
BTIE	RED BOOT TIE	2
HSS	HYDRO SHOCK DECAL	2

- 1. Park the vehicle on level ground and place the wheel in a straight forward position. Set the emergency brake and block the rear tires.
- 2. Place main bracket "A" against outside of frame and backing plate on inside of frame and install bolts provided through backing plate, through slotted holes in the frame and main bracket. (See Note Below)
- 3. Loosely install tie rod bracket using u-bolts, nuts and washers provided.
- 4. Attach shaft end of stabilizers to main bracket and and other end to the tie rod bracket (bracket "B"). (due to close fit of u-bolts to the tie rod, it requires you to install them at the end of the tie rod that is threaded and slide them up to the point they will be used.)
- 5. Extend stabilizer shafts out 4"(exactly half way) and mount in place. Rotate tie rod bracket as needed to obtain best position. Tighten all nuts securely on bolts and u-bolts at this time.
- 6. Rotate tires left to right and check all hardware for clearance. Re-tighten after the first 100 miles and periodically there after.

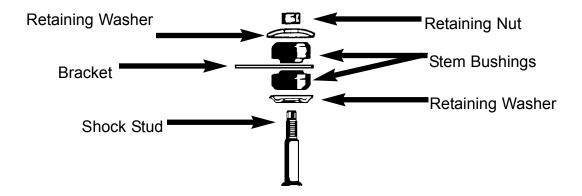

Note: Models with front sway bar will need to move bracket "A" back (away from sway bar) until clearance of sway bar is obtained.

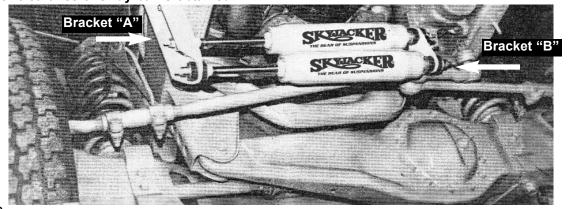

JESUS CHRIST DIED FOR YOU

John 3:16

For God so loved the world that He gave His only Son, so that everyone who believes in Him should not perish, but have everlasting life.

Romans 3:23

For all have sinned; all fall short of God's glorious standard.

Psalms 18:2

The Lord is my Rock, my fortress, and my savior; my God is my Rock, in whom I find protection. He is my shield, the strength of my salvation, and my stronghold.

STEPS TO ACCEPTING JESUS CHRIST AS YOUR PERSONAL SAVIOUR

God, I come to You admitting I have sinned against You and I need you to take control of my life. The Bible says anyone who calls on the name of the Lord will be saved. I am calling on You, Jesus. I ask that You come live in my heart and be the Lord over my life today. I do believe You died on the cross for me and came back to life to give me life!

Romans 10:9-10 says that if I confess with my mouth that Jesus is Lord and believe in my heart that God raised Him from the dead, I will be saved. Because it is by believing in your heart that you are made right with God, and it is by confessing with your mouth that you are saved.

Thank You, Lord Jesus for a new life in You! Now, go and tell somebody about your new life in Jesus.

