


## ***Installation Instructions for 10353 & 10354 Adjustable Trans Brake Switch with Button***

### **Features:**

- Adjustable Speed Control for Reaction Time
- Heavy-Duty Switch

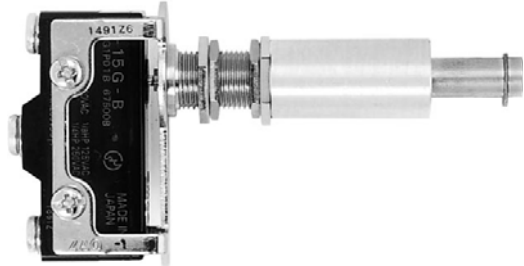

### **Installation Instructions:**

#### **Wiring:**

1. COM (common) to 12 Volt source.
2. NC (normally closed) is not used.
3. NO (normally open) to 12 Volt terminal on Trans Brake Solenoid.

#### **Button Installation:**

1. Remove snap ring from plunger.
2. Install button over plunger and tighten set screw into the snap ring groove.

#### **Adjustment:**

1. Adjust your reaction time to the tree by threading the aluminum sleeve up (counter clockwise) for faster release of the trans brake or down (clockwise) for slower release of the trans brake.