




## STB412 – A-Body Rear Shock Tower Brace

### REQUIRED TOOLS:

- Hydraulic Jack or Lift
- Standard/Metric Socket Set and Wrenches

### INSTALLATION:

- 1) Raise vehicle and secure on lift or jack stands.
- 2) Using a hydraulic jack or screw jack, support the rear axle.
- 3) Using a 9/16" socket or wrench. Loosen and remove the four (4) bolts holding the upper shock mount to the frame.
- 4) Install your BMR Shock Tower Brace on the top of the frame as shown. Align the holes and use the provided 3/8" fasteners to bolt the shock to the frame and brace.
- 5) Torque all four (4) fasteners to 45ftlbs.

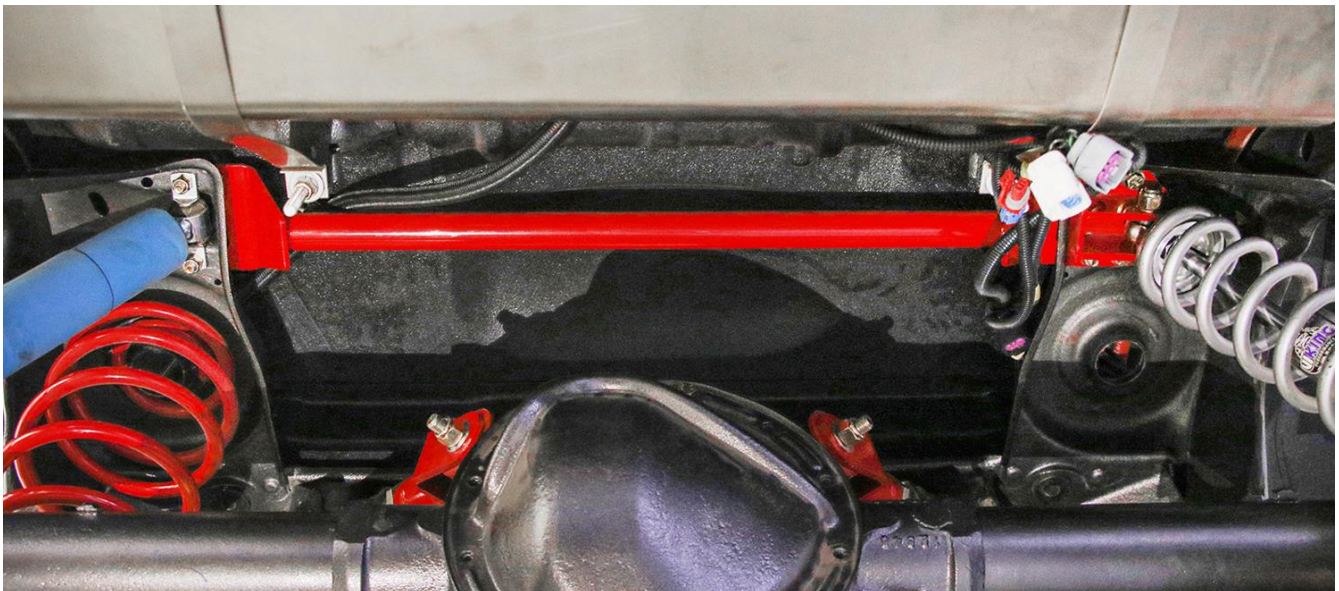

[WWW.BMRSUSPENSION.COM](http://WWW.BMRSUSPENSION.COM)

*This product is an aftermarket accessory and not designed by the vehicle's manufacturer for use on this vehicle. As such, Buyer assumes all risk of any damage caused to the vehicle or person during installation or use of this product.*