

# INSTALLATION MANUAL

# 45949

## Level of Difficulty

Easy

## Weight Capacity

Gross trailer weight (GTW)	15,000 lbs.
Tongue weight (TW)	1,500 lbs.

## Parts List

Item	Qty	Description
1	1	Adjustable shank
2	1	Trailer ball platform
3	2	Pin
4	2	Clip

Hitch pin and clip not included

## Tools Required

None

## Step 1


Insert the adjustable shank (#1) into the vehicle's trailer hitch receiver tube and secure with a hitch pin & clip or hitch lock (sold separately).

## Step 2

Determine the tow height needed for your towing situation. Raise or lower the trailer ball platform (#2) to the desired height and insert the provided pins (#3) through the platform and adjustable shank (#1). Secure the pins with the provided clips (#4).

### WARNING

The provided pins are specifically engineered for this system. If replacement pins are needed, they must be replaced with original factory mount pins (CURT# 45959).

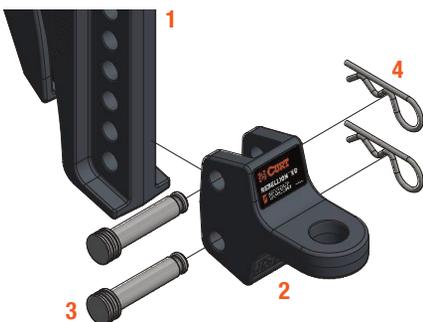

### WARNING

Never exceed the vehicle manufacturer's recommended towing capacity. The ratings of the mount system are intended to represent the capability of the product and in no way reflect the ratings or capacity of the towing system it is being used with. The consumer or operator are strongly advised to learn the ratings of the various components of the towing system and never exceed the limits of the lowest rated component being used.

Use of any pin other than that of the mount system manufacturer could be a serious safety hazard and will void the warranty.

Cannot be used in the rise position.

Never hook up trailer safety chains to the mount system. Ensure the safety chains operate freely around the mount system and do not become entangled.

## Product Photo



### NOTICE

Before you begin installation, read all instructions thoroughly.

Prior to towing, ensure all fasteners are tight and all structural components are sound. Using a torque wrench and 3/8" hex drive socket, torque hardware to 45-55 lb-ft.

## Maintenance

Mild automotive detergent may be used to clean the product. Do not use dish detergent, abrasive cleaners, abrasive pads, wire brushes or other similar products that may damage the finish.

Apply grease to the zerk located on the back of the shank assembly prior to each use to ensure quiet and trouble-free operation.

## Product Registration

CURT Group stands behind our products with industry-leading warranties. Provide feedback and help us to improve our products by registering your purchase at: [warranty.curtgroup.com/surveys](http://warranty.curtgroup.com/surveys)