



# INSTALLATION INSTRUCTIONS DUAL PASS HEAT SINK COOLER PART # 13279, 13280, 13281, 13282 & 13287

## KIT CONTENTS

### QTY. DESCRIPTION

- |   |   |
|---|---|
| 1 | Heat Sink Cooler – 3/8" NPT               |
| 2 | Cooler Brackets                           |
| 6 | 10-24 x 5/16" Stainless Button Head Bolts |

## APPLICATIONS:

Transmission Oil    Engine Oil  
Power Steering Fluid    Fuel

**IMPORTANT:** Oil and Fuel applications require the purchase of the proper OEM Spec hose.

## COOLER LOCATION

This cooler can be mounted anywhere space permits. When selecting the best location for your vehicle, always consider a location that will deliver the maximum airflow to the cooler.

## PRE-ASSEMBLY - COOLER

1. Locate the Aluminum Heat Sink Cooler, two Cooler Brackets and six 10-24 x 5/16" Stainless Button Head Bolts.
2. Using a 1/8" Allen Wrench, assemble the two cooler brackets on both sides of the Aluminum Heat Sink Cooler, making sure the 90° bent tab is facing away from the cooler. (See Fig. 2) Leave the Button Head Bolts loose.

## MOUNTING

1. Holding the cooler in place use a marker to identify the four mounting hole locations.
2. Using a drill and 9/32" drill bit, drill the four mounting holes in the desired location.

**HOSE BARB FITTINGS NOT INCLUDED** (fittings need to be purchased separately)

## CLOCK HEAT SINK COOLER

1. In the Pre-Assembly Cooler instruction line 2, you were told to leave the Button Head Bolts loose. The reason for this is because you can now clock the body of the Heat Sink Cooler so the fittings work best for the install. (See Fig. 3). Tighten the Button Head Bolts when you have found the best rotation of the fittings on the cooler.

## SYSTEM CHECK

1. Heat Sink Coolers require added fluid to your vehicles system. Add fluid after the installation, before starting the vehicle.
2. Always check fluid levels on a flat surface.
3. After the installation and the vehicle has completely warmed up, check all connections for leaks.

Please read these instructions completely before beginning installation

## TYPICAL TRANSMISSION INSTALLATION

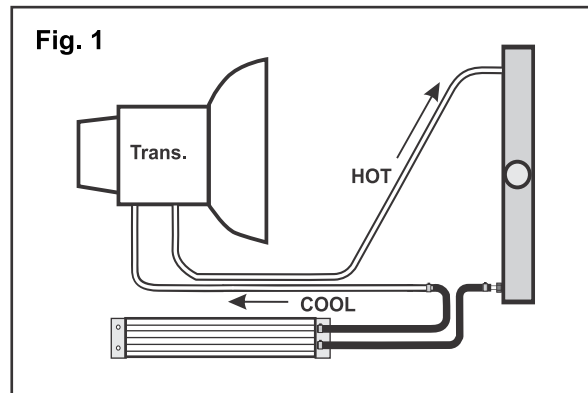


Fig. 2

**Warning:** Installation of accessories should only be undertaken by those with mechanical knowledge and are familiar with working on vehicles. Always use eye protection (goggles, safety glasses or shield). Park the vehicle in a well lit area, on level ground and apply the parking brake. Only work on a cold vehicle that has been sitting overnight, failure to do so will result in severe burns and injury. Before starting the vehicle, make sure no tools or any other items are left under hood that could interfere with or be drawn into moving parts of the engine. Failure to follow instructions can lead to severe damage and personal injury.