

## Warranty and Disclaimer

All XKGLOW roof racks come with a Limited Lifetime structural warranty to the original purchaser. Within **one year** after the purchase date, the original buyer may return any XKGLOW products that have any finish imperfections due to a defect in materials or workmanship. Finish imperfections from impacts to the piece such as rock chips or abrasions will not be considered defective. Installation of this product must be performed by a licensed professional. Should failure of the product be the result of damage occurring because of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect, or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you, and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

## Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.

## Return/Exchange Procedure

1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
4. After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 30 days from date of purchase. Original shipping charges are not refundable.


We always stand behind our products and are committed to our customers! For questions you may have, please contact [xk@xkglow.com](mailto:xk@xkglow.com).

## Package Contents -


- 1 – (2) M5 button cap fasteners with nylock nuts to mount the XKCommand module to the bracket.
- 2 – (1) JK specific XKCommand mounting bracket.

## Installation -


1. As shown in **Example 1** use a 10mm wrench to remove the fastener under the hood on the passenger side labeled #1 and loosen the fastener Labeled #2 until there is enough space to easily slide the slotted end of the bracket under it.
2. At this time mount the XKCommand unit to the bracket. As shown in **Example 2** fasten the XKCommand module to the bracket using the (2) M5 fastener sets with the nut on top. (**Install the fastener with the button cap head down to ensure clearance from the battery surface**).
3. Once the XKCommand module is secured to the bracket install the bracket using the 10mm (fastener #1) removed in step 1. Once Fastener #1 is finger tight rotate the slotted end around Fastener 2 that was loosened in Step 1. Adjust the bracket placement if needed and tighten both fasteners as shown in **Example 3**.

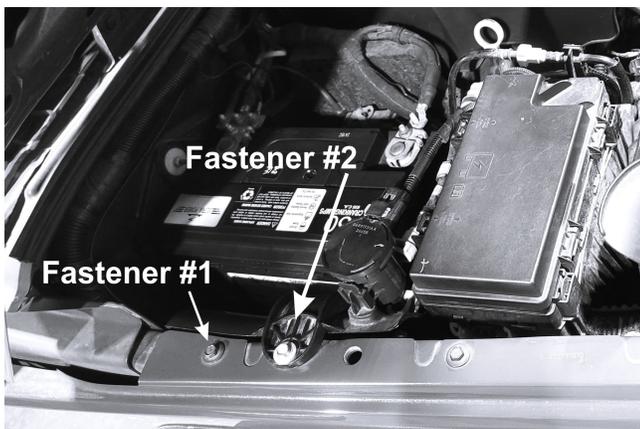

**Example 1**

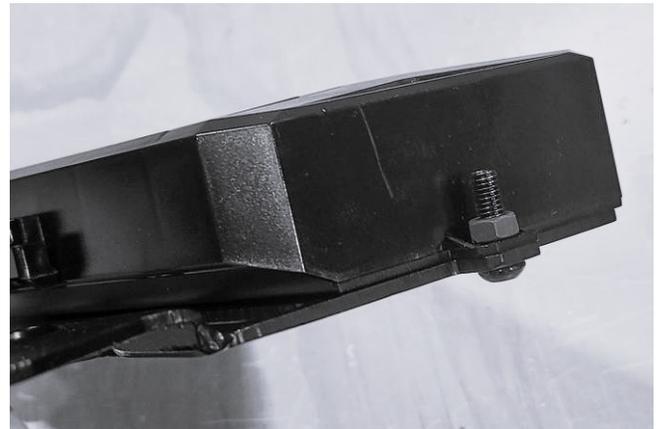

**Example 2**

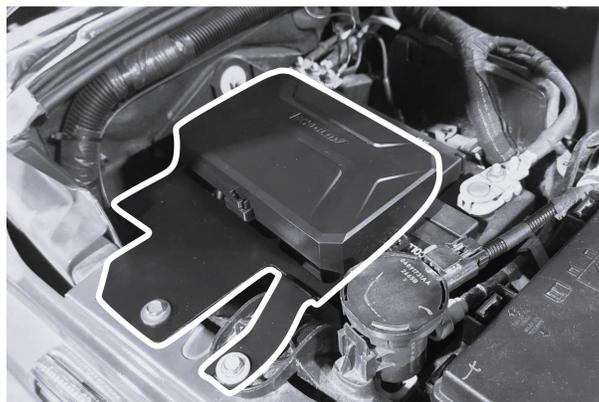

**Example 3**