



16" Diameter Premium Series Air Cleaner Kits

P/N 120-4530, 120-4535, 120-4560, 120-4630, 12-4635, & 120-4660
Filters Only : 220-30 & 220-60

INSTALLATION INSTRUCTIONS

The 16" diameter *Holley* Vintage Series Premium and Standard air cleaner kits should be installed as follows:

1. Remove the stock air cleaner.
2. Install the air cleaner gasket on the carburetor flange and reinstall the air cleaner base. Plug any vacuum lines that were attached to the OE air cleaner.

WARNING! Inadequate clearance between the throttle lever and the air cleaner could result in uncontrolled engine speed. Always check the hood clearance before closing the hood.

3. Install the air cleaner stud in the carburetor. The hood clearance **must** be carefully checked.
4. Install the air cleaner element and cover. Tighten the wing nut securely.



CLEANING INSTRUCTIONS

1. Pre-clean by lightly tapping the filter to loosen any embedded dirt particles. If any dirt remains, then lightly brush with a soft bristle brush. (If this step has sufficiently cleaned the filter element, then simply re-oil and re-install.)
2. SPRAY an ample amount of Mr. Gasket® Cleaner (P/N 78060G comes with cleaner and oil – see below) on the entire filter element and let it soak in for approximately 10 minutes. Use only Mr. Gasket® cleaner, because harsh detergents, cleaning solutions, or solvents can damage the filter element and impair its ability to work effectively.
3. RINSE the element with LOW-PRESSURE water from the clean side through the filter to the dirty side. This removes the dirt without washing it deeper into the cotton mesh of the filter element.
4. Allow the filter to dry naturally without the aid of compressed air or heat dryers. Compressed air can blow a hole in the cotton mesh and excessive heat can cause it to shrink; both of which can impair the element's ability to work effectively.
5. Put on an even coat of Mr. Gasket® filter oil to your filter. Allow the oil to soak into the filter before installation.
1. **IMPORTANT! You must never use a *Holley* Premium Air Filter without filter oil. The oil prevents dirt from passing through the filter element.**
6. RE-INSTALL your *Holley* Premium Filter, making sure that the element seats properly in the filter case. Replace the cover, add any bolts, clips, etc. and tighten to factory specifications.

Your *Holley* Premium Air Filter will need to be cleaned and re-oiled in 50,000 to 100,000 miles!



Mr. Gasket P/N 78060G

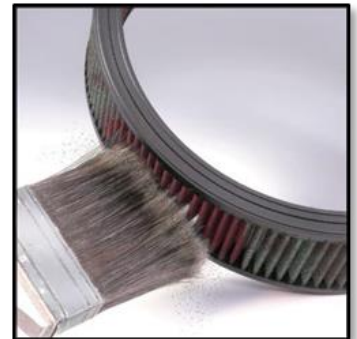

199R11428

Revision Date: 12-5-17