

# Installation Instructions for 81165 Creeper & Z-Seat

## SAFETY AND GENERAL INFORMATION

For your safety, read, understand, and follow the information provided with and on this folding creeper. The owner and operator shall have an understanding of this product and safe operating procedures before attempting to use. The owner and operator shall be aware that use of this product may require special skills and knowledge. Instructions and safety information shall be conveyed in the operator's native language before use of this product is authorized. Make certain that the operator thoroughly understands the inherent dangers associated with the use and misuse of the product. If any doubt exists as to the safe and proper use of this product, remove from service immediately.

**Inspect before each use.** Do not use if there are broken, bent, cracked or damaged parts (including labels). Any folding creeper that appears damaged in any way, or operates abnormally shall be removed from service immediately. If the folding creeper has been subjected to a shock load (a load dropped suddenly, unexpectedly upon it), immediately discontinue use. It is recommended that an annual inspection be done by qualified personnel.

## PRODUCT DESCRIPTION

This device is designed to be folded in a 'Z' shape for use as a mechanics seat or unfolded for use as a mechanics creeper. It is intended to be used to support and move, along a smooth and level surface, rated capacity loads consisting of a single person weighing no more than 300 lbs. for the purpose of performing automotive maintenance or service. This device is not intended, designed or engineered to be used for any other purpose. Rated Capacity: One person (includes any tools, equipment, personal items) weighing 300lbs. or less.

**WARNING:** Do not use this device for any purpose other than that for which it is expressly intended.


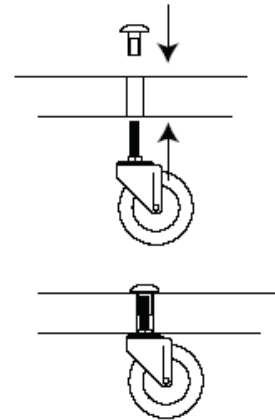


Figure 1 - Components



## CAUTION

Folding components can present pinch and crush hazards during use of this product. Exercise caution when performing adjustments and always be alert and sober while assembling and using this equipment.

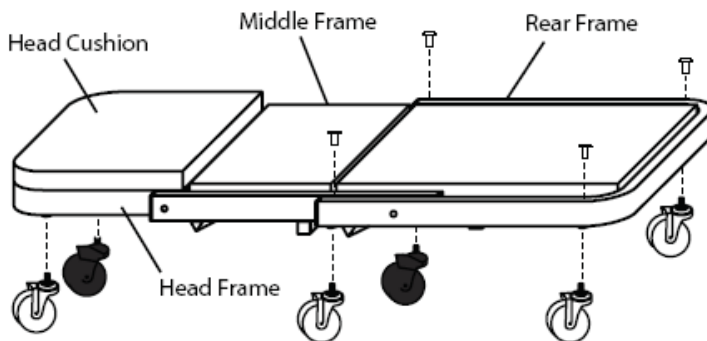

## WARNING

- Read, understand, and follow all instructions before operating this device.
- Do not exceed rated capacity. Rated capacity is 300 lbs. (includes user, tools, equipment and personal items).
- Sit down gently. Avoid shock loads caused by jumping or falling onto seat.
- Do not stand on seat.
- Beware of pinch and crush hazards when folding and unfolding.
- Keep out of the reach of children! This device is not appropriate for children's use.
- Use on smooth, level surfaces only.



1-800-345-4545 [jeps.com](http://jeps.com)

## PREPARATION


Before assembling your Folding Creeper, make sure all parts are present. If any part is missing or damaged, do not attempt to assemble or use the product. Contact JEGS customer service for replacement parts.

### Package Contents:


(1) Head Frame Section	(1) Middle Frame Section	(1) Rear Frame Section	(4) Hex Bolts
(8) Washers	(4) Hex Nuts	(6) Casters	(4) Caster Fasteners

## ASSEMBLY INSTRUCTIONS

- (1) Place Creeper Sections face down, arranged as shown in Fig. 2 (note Middle Section orientation).
- (2) Connect Creeper Sections using Hex Bolts, Washers and Nuts. Use two M8 x 60 bolts to connect Head Frame to Middle Frame. Use two M8 x 55 bolts to connect Middle Frame to Rear Frame. Tighten Nuts firmly, but not enough to bind Creeper adjustment.
- (3) Insert Lock Pin into hole in frame side. Check for proper operation.
- (4) Using the included open-end wrench, attach two Casters to the threaded holes in the Head Frame section. Use a 5mm hex key to fasten the remaining four Casters to the Creeper Frame. Insert the threaded Fasteners from the top and the Casters from the bottom, and then tighten with hex key.

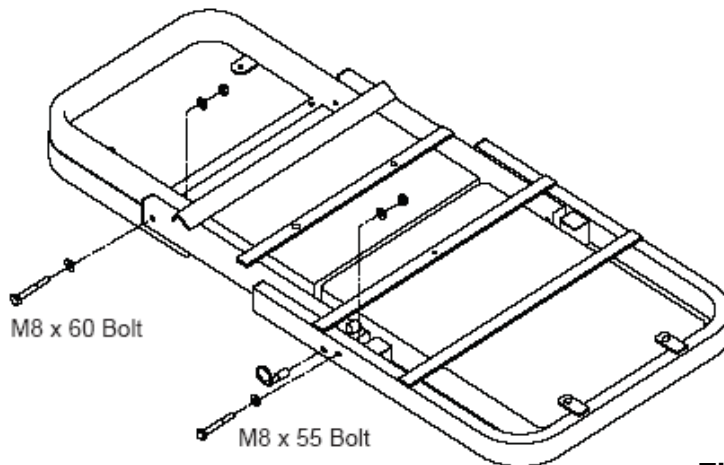


**Figure 2 - Creeper Frame**

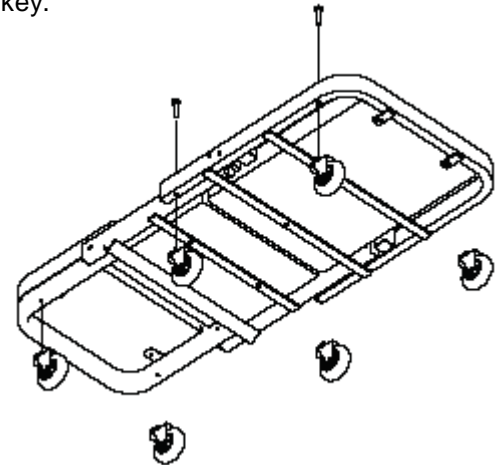


**Figure 3 - Attaching Creeper Casters**

## OPERATING INSTRUCTIONS

- (1) Unlock the spring loaded Lock Pin by pulling out until disengaged, at the same time rotate the Head Frame and Middle Frame upward and back towards the Rear Frame section until the Lock Pin can engage the Creeper Seat Locking Sleeve (Fig. 4). Ensure Lock Pin is fully engaged.
- (2) Flip Head Frame forward until horizontal.
- (3) Unlock the spring loaded Lock Pin by pulling out until disengaged, then reverse steps 1, 2 to convert Creeper Seat into Creeper.

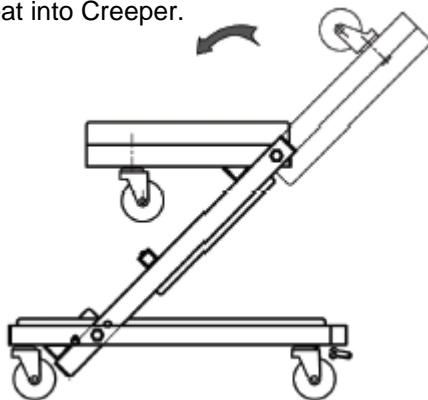

**Figure 4 - Adjusting Creeper to seat**

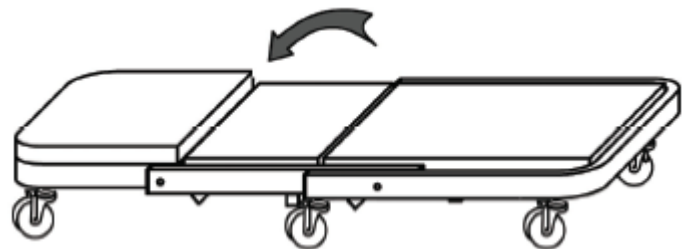

**Figure 5 - Adjusting Seat to Creeper**

## MAINTENANCE

Wipe clean as needed. Use mild upholstery cleaner (not caustic) to clean seat as needed.

**CAUTION:** Do not lubricate casters



**1-800-345-4545 jeps.com**