




**6-PAK**  
**Installation**  
**Instructions**  
**(MEMCAL)**

**Technical (714) 848-5515**


# Installation Instructions

## JET 6-PAK chip (Memcal)


1. Locate ECM (see the location chart on page 6) and remove the mounting screws and unplug the ECM wiring harness. It is not necessary to unplug the battery.
2. Remove the access cover located on the top of the ECM and remove the stock chip.

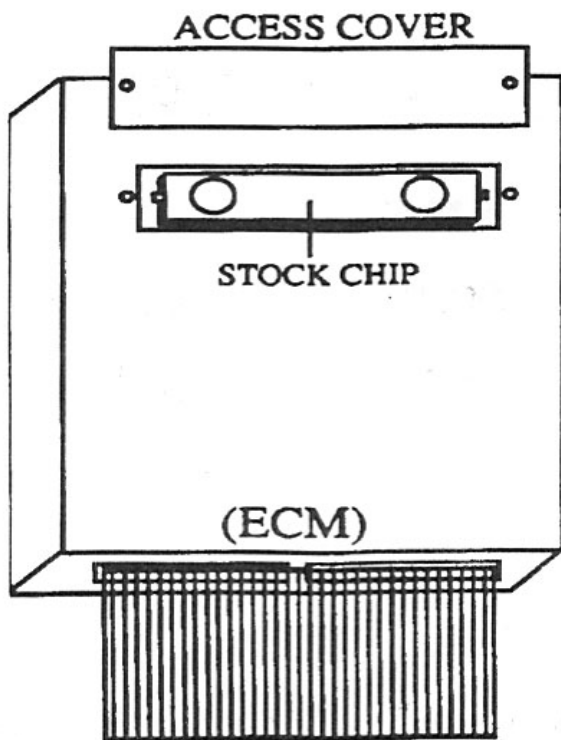


3. In some cases, it is necessary to remove the top half of the ECM to install the 6-PAK chip. To do this, remove all the external screws that hold the ECM together (most have 6 to 9 screws) and remove the top half of the ECM.

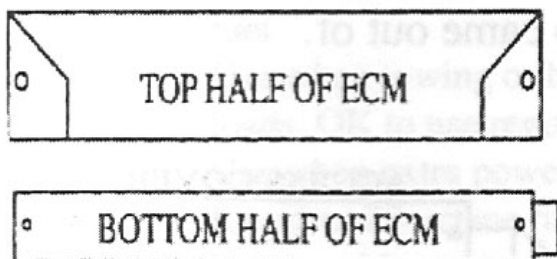

4. To assemble the 6-PAK, line up the notch in the JET Memcal adapter with the guide on the stock chip and push the chip on to the pins of the adapter.

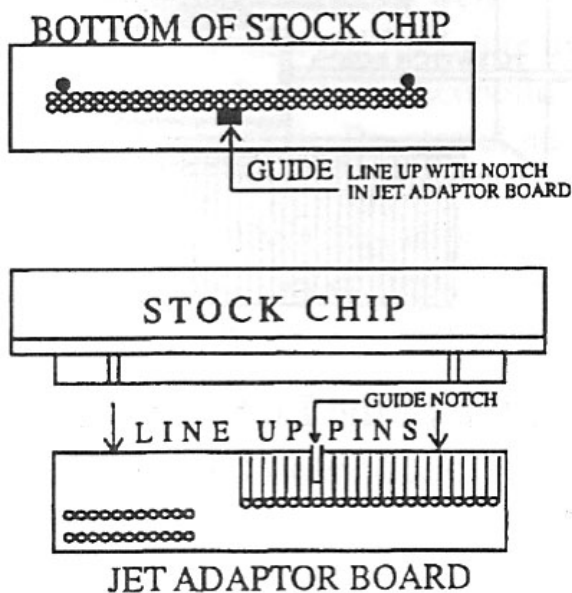

5. Connect ribbon cable connector (28 pins) to the vertical pins on the adapter with the ribbon cable laying across the stock chip.
6. Plug the entire assembly into the ECM socket that the stock chip came out of.

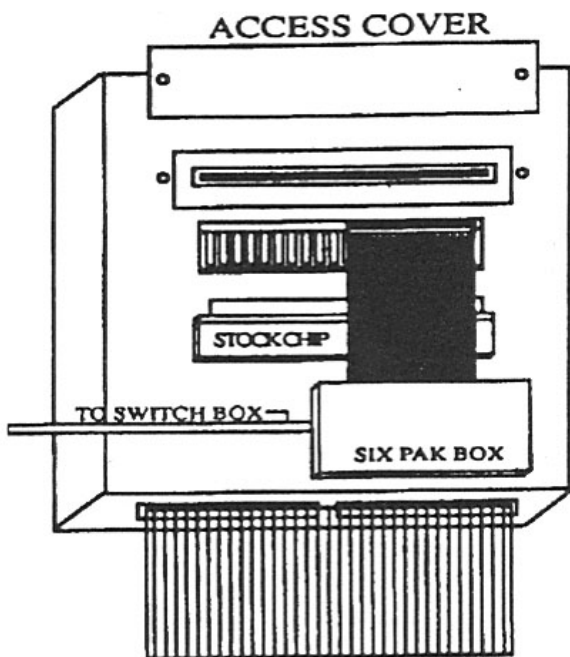

7. Replace the top of the ECM, guide the 6-PAK through the hole, put screws back in the ECM. Remove the adhesive cover and stick it to the top of the ECM.

## How to use the **JET Powertech 6-Pak Chip**:

The 6-pak chip includes the following programs.

Switch box position

- #1. Economy Chip: For use when Maximum fuel economy is desired, OK to use regular unleaded fuel.
- #2. Towing Chip: Use when towing or hauling heavy loads, OK to use regular unleaded fuel.
- #3. Stage 1: Use when extra power is needed. Requires 89 octane fuel minimum.
- #4. Stage 2: For the ultimate in performance gains (drag racing etc.) Requires lower temp thermostat, minimum 92 octane.
- #5. Valet Parking: For use when you don't want anyone "Hot Rodding" your car or truck, will not accelerate well.
- #6. Is reserved for future use. Setting will default to the economy position.
- #0. Security Mode: **NOTE:** Be careful not to put in position  
0 while the car is in motion, although it will not damage the vehicle.  
The car will stall.

**CAUTION:** For safety reasons we do not recommend changing the chip selection when the vehicle is in motion.

**Key Lock:** For normal running position the key straight up. When turned to the right it will automatically go to the security position.

**Place this card in the glove box along with  
the vehicle registration and/or warranty**

*The information shown below is provided for future reference*

## **Jet Powertech Performance Product**

The product for which this document was issued is emission-sensitive and is subject to certain federal and state regulations; the manufacturer has assigned an identification color code designating its intended use.

designation is:



**COLOR CODE GREEN**

The product accompanying this document has been guaranteed a California Air Resources Board (ARB) exemption, an "EO" number, or is a direct or consolidated replacement part. It is 50-state legal, per the manufacturer's application guide.



## WHAT TO DO BEFORE TAKING YOUR VEHICLE IN FOR SERVICE

If a problem occurs that may require you to take your vehicle to a mechanic or dealership for service, first remove the JET Performance Chip or Module and reinstall back to stock. If the problem disappears when you remove the JET Performance Product, call JET and we will troubleshoot the product. However, if returning to stock does *not* cure your problem, there is nothing wrong with your JET Performance Product and you will need to have your vehicle serviced.

*Anytime* a diagnostic machine is to be used, the vehicle must be back to stock. Diagnostic machines expect to find the original stock program and often cannot correctly analyze the problem if other devices are installed. Failure to reinstall your system back to stock can result in unnecessary and costly repairs not covered by JET. Before you have any work done on the vehicle that you feel may have been related to the JET Performance Chip or Module, please call JET at 714-848-5515.

## Limited Warranty

JET Performance Products warrants Chips and Modules to be free from defects in material and workmanship under normal use and if properly installed. This limited lifetime warranty is to the original purchaser for as long as he or she owns the vehicle on which the product was originally installed, provided all information requested is furnished. If found to be defective as mentioned above, it will be replaced or repaired at the sole discretion of JET if returned prepaid along with proof of date of purchase.

All other products and services performed by JET are warranted in defects in material and workmanship for a period of 6 months from date of purchase. This warranty is to the original purchaser for as long as he or she owns the vehicle on which the product was originally installed. Repair, Replacement, or Credit will be based on the date of purchase. Costs for labor are specifically excluded and are the sole responsibility of the purchaser.

This warranty does not apply to Custom Programming or any product incorrectly installed, modified by the purchaser, or to any product that has been subjected to misuse, negligence or accident.

To obtain warranty service and Return Authorization Number, contact our Customer Service Department at 714-848-5515 between 8 am and 5 pm Pacific Standard Time, Monday through Friday.

Defective Products may be brought or sent prepaid (with Return Number) to JET Performance Products, 17491 Apex Circle, Huntington Beach, CA 92647.