

# DATSUN 240Z 1970-1973 ALUMINUM RADIATOR

## PARTS LIST AND INSTALLATION GUIDE

### PARTS LIST

1PC | MISHIMOTO RADIATOR

### TOOLS NEEDED

JACK + JACK STANDS	12MM WRENCH
COOLANT	RATCHET
FUNNEL	RATCHET EXTENSION
FLATHEAD SCREWDRIVER	12MM SOCKET

### DISCLAIMER

- Please dispose of any liquids properly.
- Allow vehicle to cool completely prior to attempting installation.
- Mishimoto Performance (MP) is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of MP products.
- MP always suggests that a trained professional install all MP products.
- Do not run the engine or drive the vehicle while overheating. Serious damage may occur.
- Raise vehicle only on jack stands or on a vehicle lift.

### INSTALLATION INSTRUCTIONS

#### 01 | REMOVING THE STOCK RADIATOR


1. First jack up the vehicle and support on jack stands.
2. Locate the drain plug on the bottom of the radiator and drain the coolant.
3. Disconnect the upper radiator hose.



4. Disconnect the lower radiator hose.



5. Next, remove the four 12mm bolts holding the radiator in place. These bolts must be accessed from the front and rear of the radiator support. Both the 12mm wrench and ratchet will be necessary.

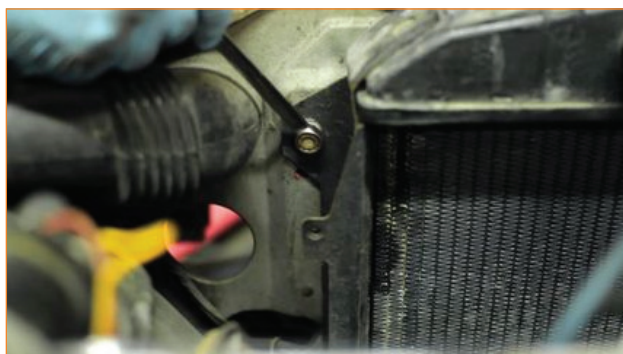

6. Now you can fully remove the radiator from the engine bay.



CONTINUED ON FOLLOWING PAGE →

# 01


# DATSUN 240Z 1970-1973 ALUMINUM RADIATOR INSTALLATION GUIDE

## 02 | INSTALLING THE MISHIMOTO RADIATOR

1. First place the Mishimoto radiator into position.



2. Reinstall the four 12mm bolts holding the radiator in place.

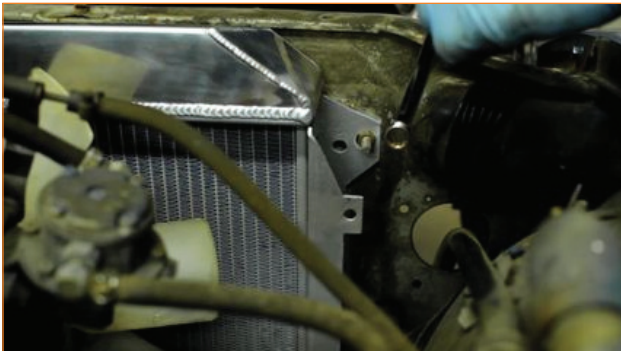

3. Reconnect the upper radiator hose.



4. Install the lower radiator hose.

5. Refill the coolant system with a 50/50 mix of antifreeze and coolant.



6. Start the vehicle and put the heat on high. Check for any leaks in the system. Enjoy your new Mishimoto radiator!



[CLICK HERE TO CHECK OUT THE  
STEP BY STEP INSTALLATION VIDEO.](#)