

CAUTION! PLEASE READ!



Proper Charging is Crucial! Charge before initial use!

Be sure to read the Instruction Sheet for full instructions.

Proper Charging is crucial to the life of your XS Power TITAN8 battery. It is very important that the temperature of the battery remains cool with respect to the charge voltage.



Do Not Over-tighten Battery Terminals!

Whether using the automotive post adaptors, bolts or screws, the tightening torque should never exceed 8 ft-lbs max on any XS Power Battery!

Introduction

Congratulations on your purchase of an XS Power Batteries lithium TITAN8 battery. You have in your hand the cutting edge lithium battery made for extreme power or extreme reserve applications.

Lithium cells hold, in general terms, three times the energy density of lead acid batteries. However they need careful management to be safe and provide a long service life. Fundamentally, they have serious risks associated with them and these must be understood to avoid danger, loss of property, and personal injury.

Lithium batteries are not lead acid batteries. That seems to be stating the obvious but for the majority of the people reading this instruction sheet, it is a significant one. You are probably replacing a lead acid (flooded, maintenance free, or AGM) battery with this new lithium battery. To get the most out of your new battery, specific care and procedures are required. Read this sheet carefully so that you fully understand what your new lithium battery can and cannot do.

⚠ The Quick List

- READ the battery label and do not exceed any of the ratings.
- Do not over discharge this battery. Terminal voltage should at all times remain above 9V(12V models), 10.8V(14V models) or 12.5V(16V models).
- Disconnect when not in use.
- Make sure you have the correct charger. Lithium batteries are voltage sensitive so pay close attention to the max voltage rating.
- Do not use an undersized battery for the job esp. in applications under -20°C(-40F).
- If the terminal voltage under-load drops below 9V (12V Models), 10.8V (14V Models), or 12.6V (16V Models) the battery is too small for the job. Stop and resolve this issue before continuing.
- Pulse loads by their very nature are a pseudo short circuit of the battery. This is fundamentally destructive to the battery so each battery's State of Health should be regularly checked.
- See the separate SDS sheets for additional information at, <https://www.4xspower.com/support/material-safety-data>

TEMPERATURE SPECIFICATIONS

Nominal Operating Temp.	-4°F - 131°F (-20°C - 55°C)
Recommended Operating Temp.	14°F - 95°F (-10°C - 35°C)
Storage Temp. Range	5°F - 122°F (-15°C - 50°C)



PROP 65 WARNING: This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer or birth defects or other reproductive harm. Wash hands after handling.

For more information, visit www.P65Warnings.ca.gov

Installation

You may mount the lithium battery in any orientation as long as it is secured from short circuits and/or movement. This battery is very light and has a built in mounting system that also includes the hardware to mount the battery. Do not over tighten the included mounting screws. Observe the maximum torque ratings on the battery labels.

- This battery has many connection points, use caution when making connections. There are: no low voltage disconnect, reverse polarity, or short circuit protection on any of the connection points on this battery. Short circuits will flow huge amounts of current instantly with the ability to melt or vaporize metal. When connecting I/O or larger cables make sure the other ends are either connected securely to the proper terminals of a device or securely covered with none conductive material to avoid accidental short circuits.
- Each battery comes with a mounting template that indicates the locations of the mounting holes as well as where to drill holes to route cables. It is recommended to do a "dry fit" of the batteries you will be mounting to make sure there are no unforeseen problems before you start drilling holes into the location you plan to mount your battery or battery array.
- It is not recommended to mount these batteries inside the engine compartment or close to any high temperature device, excessive heat will cause the battery to prematurely age and will decrease cycle life. If it must be in a high temperature environment make sure you use heat shielding or duct cool air to the area around the battery. This product will perform best if the temperature of the installation environment is below 131° F (55° C).
- This battery is specifically designed to be connected in series or parallel with the included side bus plates. Only identical models should be connected in this way. Do not attempt to connect these in parallel or series with other types or voltages of batteries as damage and possible personal injury or property damage may result.
- Open circuit voltage should be around 12.0V for 12V, 14.4V for 14V, and 16.8V for 16V when fully charged after resting for 8 hours. If it is less than this after resting for 8 hours, the battery should be taken out of service and must be checked for capacity, cell balance, and state of health before resuming operation.

REAL POWER UNREAL PERFORMANCE

Charging


Typically the battery will ship at less than 100% State of Charge (SOC.) Please charge your new battery immediately upon receipt. It is important that you use a lithium capable charger your battery, and one that is rated for the correct voltage.

Lithium batteries are by their very nature voltage sensitive. Further, the lithium battery is the most vulnerable to damage while charging. It is important that the charging process of the battery be fully understood and carefully controlled.


- DO NOT use a battery charger designed for “Flooded” or “Maintenance Free” batteries.
- DO NOT use a battery charger with a “de-sulfation mode” or “float mode”.
- Remove the battery charger once the battery is full meaning 100% State of Charge. Unlike lead acid batteries, over charging lithium batteries DOES NOT help them nor cause them to store more power. Instead it harms them and should be strictly avoided.
- Lithium cells are in a state of stress when at 100% SoC and beyond. Continuous charging must be avoided.
- Unlike most lithium batteries, TITAN8 batteries have a very high recharge rate and can, if a large enough charger is used, be charged to 100% SOC in approximately 5 minutes. Speed of charge will be determined by the output of the charger you are using.
- If you discharge the battery beyond its recommended minimum voltage, it is not recommended to fast charge the battery. In this situation the best method to charge the battery to keep it from being damaged is to charge it at 1 amp or less for an extended period of time until 100% state of charge is reached.
- Lithium batteries do not have a “memory effect” therefore they do not have to be empty to benefit from re-charging. Simply recharge them when convenient and avoid overcharging. In general, float charging or battery maintaining should be avoided. However, since the chemistry is LTO, they can be used in a system that does constantly charge the battery to maintain a ~90% SOC without damaging the battery.

The charging and discharging behavior of a lithium battery should be very predictable and repeatable. Changes in behavior should be understood and not ignored. For spot checking the batteries, use an accurate digital multimeter to measure the voltage to at least two decimal places. (Analog type meters are not recommended.)

During charging and discharging the voltage should follow this pattern in general:

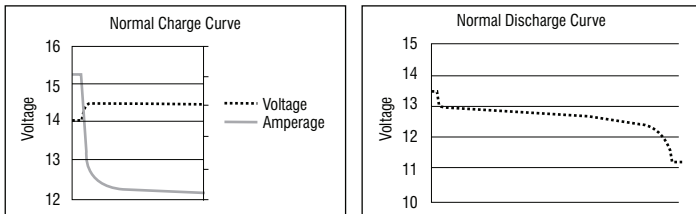

It Should NOT Look Like This:

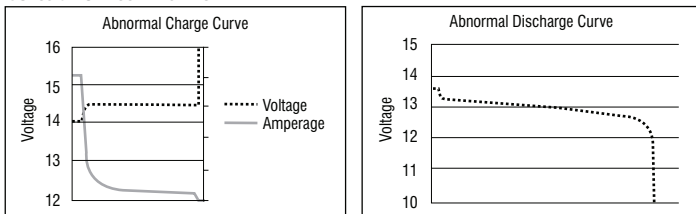

Charging(cont'd)

Charge Voltage

S5	S6	S7
13.6 - 14.5V	15.5 - 17.4V	18.2 - 20.3V

State of Charge

S5		S6		S7	
13.60	100.00%	16.40	100.00%	19.13	100.00%
13.20	96.00%	16.00	98.00%	18.67	98.00%
12.80	77.00%	15.60	92.00%	18.20	92.00%
12.40	54.00%	15.20	74.00%	17.73	74.00%
12.00	25.00%	14.80	50.00%	17.27	50.00%
11.60	10.00%	14.40	25.00%	16.80	25.00%
11.20	8.00%	14.00	10.00%	16.33	10.00%
10.80	5.00%	13.60	7.00%	15.87	7.00%
10.40	1.00%	13.20	6.00%	15.40	6.00%
10.00	0.00%	12.80	4.00%	14.93	4.00%
		12.40	1.00%	14.47	1.00%
		12.00	0.00%	14.00	0.00%

Power Wattage

PWR-S5		PWR-S6		PWR-S7	
Standalone	4,000W	Standalone	5,000W	Standalone	6,000W
100A Alt.	5,000W	100A Alt.	6,000W	100A Alt.	7,000W
200A Alt.	6,000W	200A Alt.	7,000W	200A Alt.	8,000W
300A Alt.	7,000W	300A Alt.	8,000W	300A Alt.	9,000W

RSV-S5		RSV-S6		RSV-S7	
Standalone	2,500W	Standalone	3,000W	Standalone	3,500W
100A Alt.	3,500W	100A Alt.	4,000W	100A Alt.	4,500W
200A Alt.	4,500W	200A Alt.	5,000W	200A Alt.	5,500W
300A Alt.	5,500W	300A Alt.	6,000W	300A Alt.	6,500W

Standalone Burst Discharge(5 sec)

PWR-S5	1000A pulse capability (10,000W+)
PWR-S6	1100A pulse capability (11,000W+)
PWR-S7	1200A pulse capability (12,000W+)
RSV-S5	500A pulse capability (5,000W+)
RSV-S6	600A pulse capability (12,000W+)
RSV-S7	700A pulse capability (14,000W+)



REAL POWER UNREAL PERFORMANCE

PARALLEL



PWR -S5	PWR -S6	PWR -S7
12v 30Ah	14v 30Ah	16v 30Ah



RSV-S5	RSV-S6	RSV-S7
12v 60Ah	14v 60Ah	16v 60Ah

SERIES



PWR-S5	PWR-S6	PWR-S7
36v 10Ah	42v 10Ah	48v 10Ah




RSV-S5	RSV-S6	RSV-S7
36v 20Ah	42v 20Ah	48v 20Ah


*PWR-S5 Shown

REAL POWER UNREAL PERFORMANCE


Features

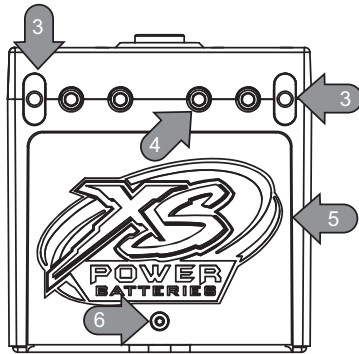

- 1 - Top Positive Terminal
- 2 - Top Negative Terminal
- 3 - Side Terminals Corresponding with Top Terminals
- 4 - Set Screws for 0 AWG and 00 AWG Wire Connections
- 5 - Wire Chase Cover
- 6 - Wire Chase Screw
- 7 - Negative 0 AWG and 00 AWG Wire Connections
- 8 - Positive 0 AWG and 00 AWG Wire Connections
- 9 - Battery Mounting Holes

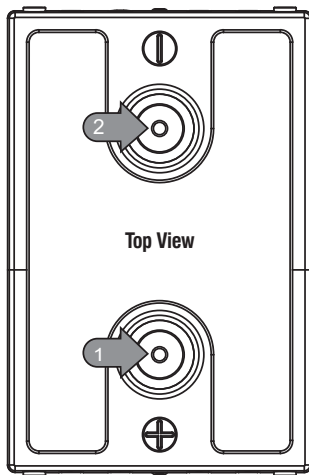

Top View

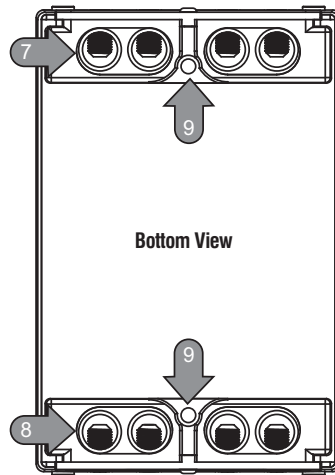

Bottom View

*S5 Titan8 shown. All details on each model are the same the only difference is the length of each battery.

Usage

In general, the lithium battery will greatly outperform the lead acid battery it is replacing. If it does not, chances are you have a battery that is too small for the job. It may be necessary to use a larger capacity battery, or and a second battery in parallel. Pulling the battery's terminal voltage below 9V(12V models), 10.8V(14V models), or 12.6V(16V models) for even the shortest amount of time is prone for a premature failure.

Lithium batteries have a relatively flat discharge curve when compared to a lead acid battery. The average terminal voltage throughout discharge will be 12.0V for 12V models, 14.4V for 14V models or 16.8V for 16V models. Unfortunately, this can make judging the state of charge difficult when the battery is nearly empty. Lithium batteries at a low state of charge will show a relatively high voltage. It is important to get familiar with the limits of your battery because over discharge (discharge below 9V for 12V models, 10.8V for 14V models, or 12.6V for 16V models) must be strictly avoided.

Technical Assistance

Our Customer Service Department is eager to help you with any questions or issues you may have and are available from 8:30AM to 5:30PM, Monday thru Friday at 865-688-5953. In addition, technical support is available via FAX at 865-281-9844 or by email at tech@xspowerbatteries.com. Be sure to check out our website for additional technical and product information.

Warnings

To reduce the risk of fire or personal injury including burns:

Warnings(cont'd)

To reduce the risk of fire or personal injury including burns:

- Do not over charge the battery (meaning exceed the maximum voltage OR amperage and remove the charger once the battery is at 100% SOC.)
- Do not short circuit the terminals.
- Use with alternators requires that the charging voltage be limited to 14.8V or less. 13.0~14.0 is preferred for 12V models, 15.6-16.8 for 14V models and 18.2-19.6 for 16V models.
- Avoid high temperature. Never operate the battery in environments above 140°F or if the battery itself exceeds 140°F at any point.
- Disconnect the battery in total before welding anywhere on the vehicle.
- Do not submerge in water. This battery is not waterproof.
- Do not crush, puncture, or dispose in fire or water.
- Do not attempt to open, disassemble, or service the battery pack.


Warranty

The following damage is specifically excluded:

- Over discharge below 9V for 12V models, 10.8V for 14V or 12.6V for 16V models open circuit voltage.
- Overcharge above 14.5V for 12V models, 17.4V for 14V models or 20.3V for 16V models.
- Capacity is not guaranteed (ie. if the battery still accepts energy and discharges energy, it is considered "good")
- Internal resistance is not guaranteed. (ie. if the battery was at 4milliΩ new and now is 6, 8, 10 or greater milliΩ internal resistance, it is considered "good")
- Water damage and resulting internal corrosion.
- Physical damaged such as case cracks from drops, impacts, or crushing it with a battery mount.

More specifically this text applies:


This limited warranty shall not apply to damage to or failure of a product that results from: (i) any negligence other than by XS Power; (ii) accident (including, but not limited to, damage during shipment and natural disasters); (iii) other circumstances beyond XS Powers' control (including, but not limited to, normal capacity loss or increased resistance due to product aging); (iv) improper installation, operation (including, but not limited to, abnormal or non-consumer use or use in an environment outside the recommended temperature range), maintenance, or storage (including, but not limited to, storage in an overly discharged state); or (v) any other damage directly or indirectly caused by the product's owner, other third parties, or other products (including, but not limited to, misuse, abuse, overcharging, over-discharging, exceeding of the product's limitations set forth in the product's specification sheet or label, neglect, physical damages caused by accidents or crashes, alterations, or connection to poorly-grounded battery chargers). This limited warranty shall also not apply to defects or non-conformities due to the manufacturing process discovered after the expiration of the applicable warranty period. This warranty does not extend to any damage caused by affixing any parts or equipment not purchased from XS Power to the product and no warranties, either express or implied, are made with respect to equipment or products not produced by XS Power. If the product is relocated outside of the continental United States during the applicable warranty period, the product's owner will be responsible for any additional charges (including, but not limited to, shipping and other related charges and expenses) incurred during the warranty process as a result of such relocation.

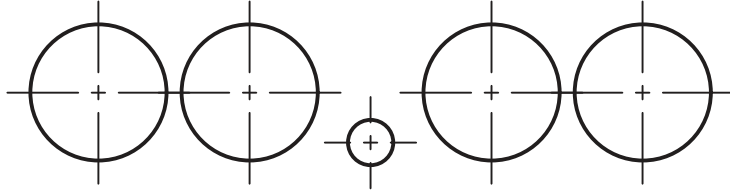


PWR/RSV - S5

Mounting Template

Be sure to print at 100%.

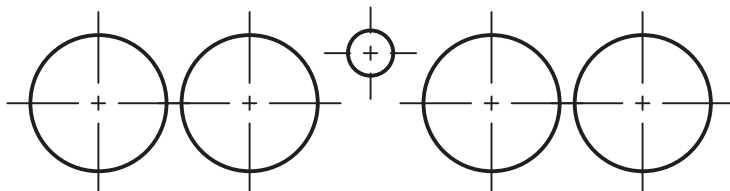


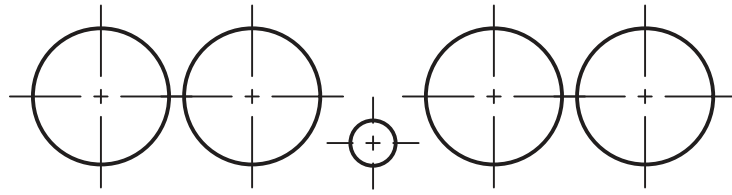


PWR/RSV - S6

Mounting Template

Be sure to print at 100%.

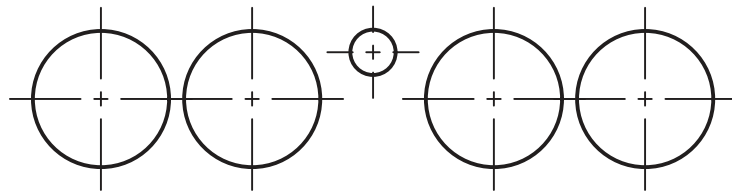

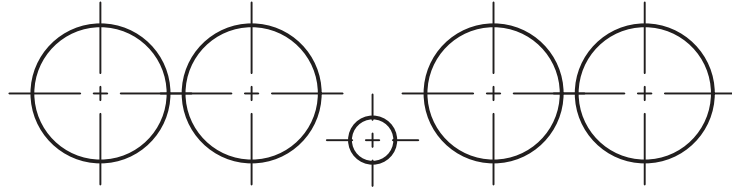

PWR/RSV - S7

Mounting Template

Be sure to print at 100%.

