



INSTALLATION INSTRUCTIONS

P/N 84750 – FORD 9” DIFFERENTIAL SHIM AND REPLACEMENT PARTS KIT

This kit is recommended for applications where aftermarket aluminum pinion supports are used. The Pinion Depth Shims, Pinion Shaft Seal, 3/4”-20 Pinion Nut, 3/8-16 x 1” Hex Head Bolts and the Housing Gasket can be used on stock 9” Ford Rear Ends. We do not recommend using these pinion preload shims with a Stock Cast Iron Pinion Support. If these shims are used with a Stock Cast Iron Pinion Support, the outside diameter of the shim will have to be trimmed.

The Pinion Preload shims will give you a range of .005 to .065 total shim thickness. What shims to use depends on the amount of preload required. Please note that you will have to use the solid spacer that comes with the aftermarket aluminum pinion kit and machine it if necessary. These preload shims are to accompany the spacer for assembly if needed.

PARTS LIST


1	PINION HOUSING O-RING
1	HOUSING GASKET
1	PINION SHAFT SEAL
1	2/3”-20 PINION NUT

9 PINION DEPTH SHIMS

2	.004”
1	.006
1	.007”
1	.008”
1	.009”
3	.010”

8 PINION PRELOAD SHIMS

1	.005”
1	.006”
1	.007”
1	.008”
1	.009”
3	.010”

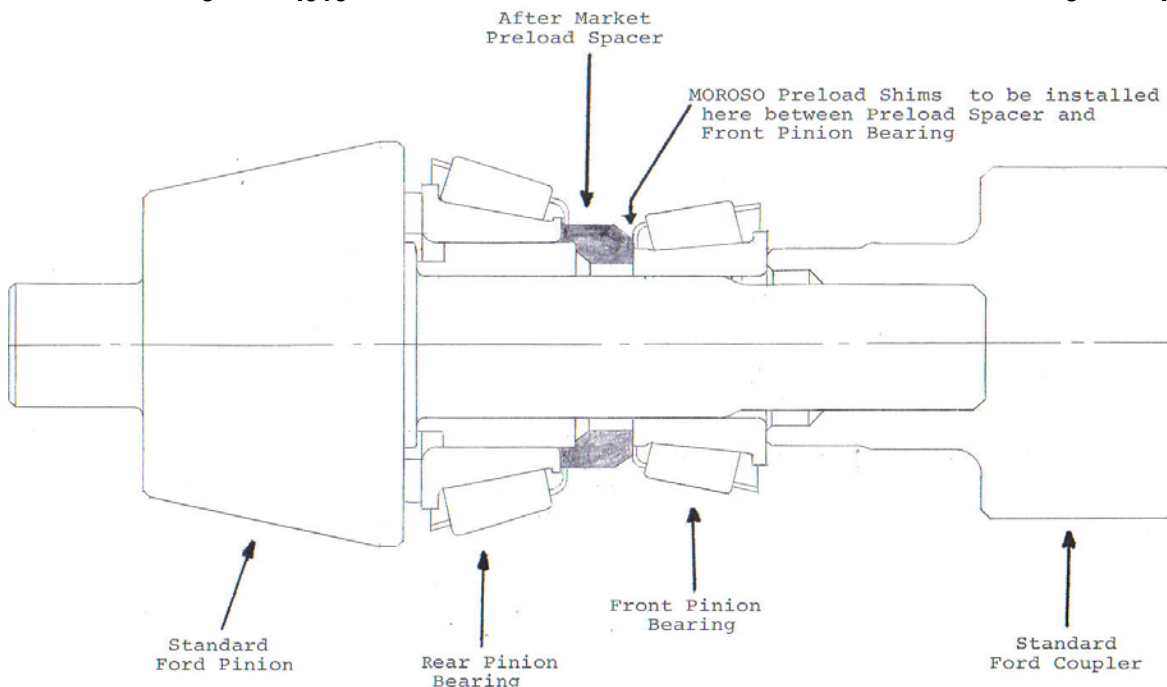

**For Technical Assistance, Call Moroso's Tech Line at
(203) 458-0542, 458-0546 8:30am – 5:00pm Eastern Time**

**MOROSO PERFORMANCE PRODUCTS, INC
80 CARTER DR • GUILFORD, CT 06437-2116
Phone: (203) 453-6571 • Fax: (203) 453-6906**