

2014+ GMC Sierra LD Grille Installation Instructions

Congratulations on your purchase of a high quality PUTCO product. Should you need any application or technical assistance, feel free to call us at: 1-800-357-9261

Monday-Friday 8:00 a.m. - 5:00 p.m. (Central Standard Time)

Contact your PUTCO dealer for other quality accessories.

Please read all instructions before installation and to check to see that all parts are included.


KIT CONTENTS:	
Description	Qty.
Boss Grille	1
1/4" - 20 Bolt	6
1/4" - 20 Nylock Nut	6
1/4" Washer	12
L Bracket	6
Only for Lighted Grille (below)	
10" Luminix Light	2
Wiring Harness	1
Switch	1
Light Bar Instructions	1

Tools Needed:

- 7mm, 10mm Wrench
- T15 Torx
- 7/16" Wrench
- Flat Head Screw Driver
- Saw- Recommended: Oscillating Hand Tool
- 1/4" Drill bit

Insert Grille Installation

1. Remove Grille from packaging. Check to see if all parts from above table of kit contents are included.

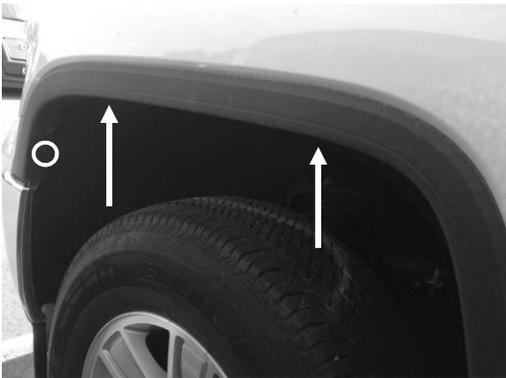


2. Remove (2) T15 Head Bolts (shown by arrows) and (1) 7mm bolt (shown by circle) from the front fender trim of truck. Driver side is shown. Repeat on passenger side.




3. Pull front of fender trim away from truck. Remove (1) 7mm bolt from inside of upper bumper, location indicated by arrow. Driver side is shown. Repeat on passenger side.

LIMITED 90 DAY WARRANTY

Putco guarantees its Stainless Steel and Aluminum products against defects in workmanship and material for as long as you own your vehicle. All painted products have a 90 day warranty on the painted surface. Any defects resulting from faulty material or workmanship will be warranted by Putco and repaired or replaced at our discretion. Putco assumes no extra labor costs. Damages caused by freight carriers, improper installation, misuse, collision, or neglect will not be warranted by Putco.

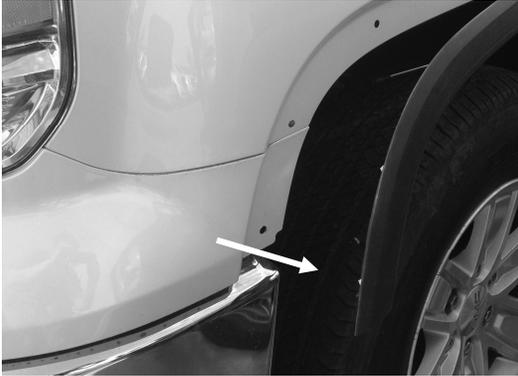


4. Pull out upper bumper end. Driver side is shown. Repeat on passenger side.

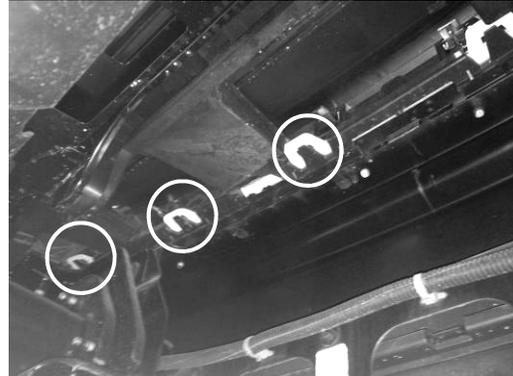

5. On back side of bumper, use a flat headed screw driver to unclip (total 6) clips. Driver side locations shown above. Repeat on passenger side



6. Pull upper bumper piece off of truck.

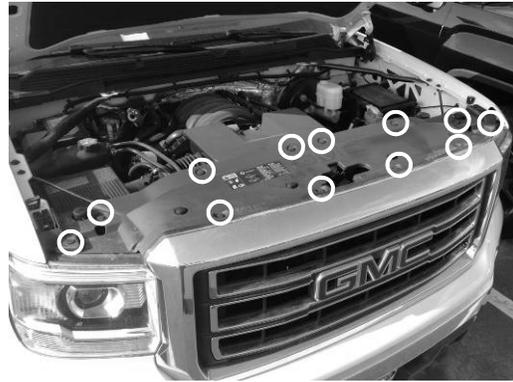

7. Remove plastic cover by removing 12 retaining clips with flat head screw driver (locations shown above).




8. Remove (8) 10mm bolts from the grille. Locations shown above. Once bolts are removed pull grille straight off of truck.




LIMITED 90 DAY WARRANTY

Putco guarantees its Stainless Steel and Aluminum products against defects in workmanship and material for as long as you own your vehicle. All painted products have a 90 day warranty on the painted surface. Any defects resulting from faulty material or workmanship will be warranted by Putco and repaired or replaced at our discretion. Putco assumes no extra labor costs. Damages caused by freight carriers, improper installation, misuse, collision, or neglect will not be warranted by Putco.

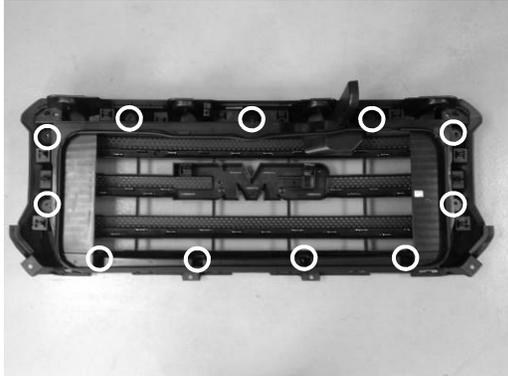


After Step 9, instructions vary according to the type of Light Duty GMC Sierra you have.

9. Remove shroud from behind grille. Use 7mm wrench to remove 11 bolts.

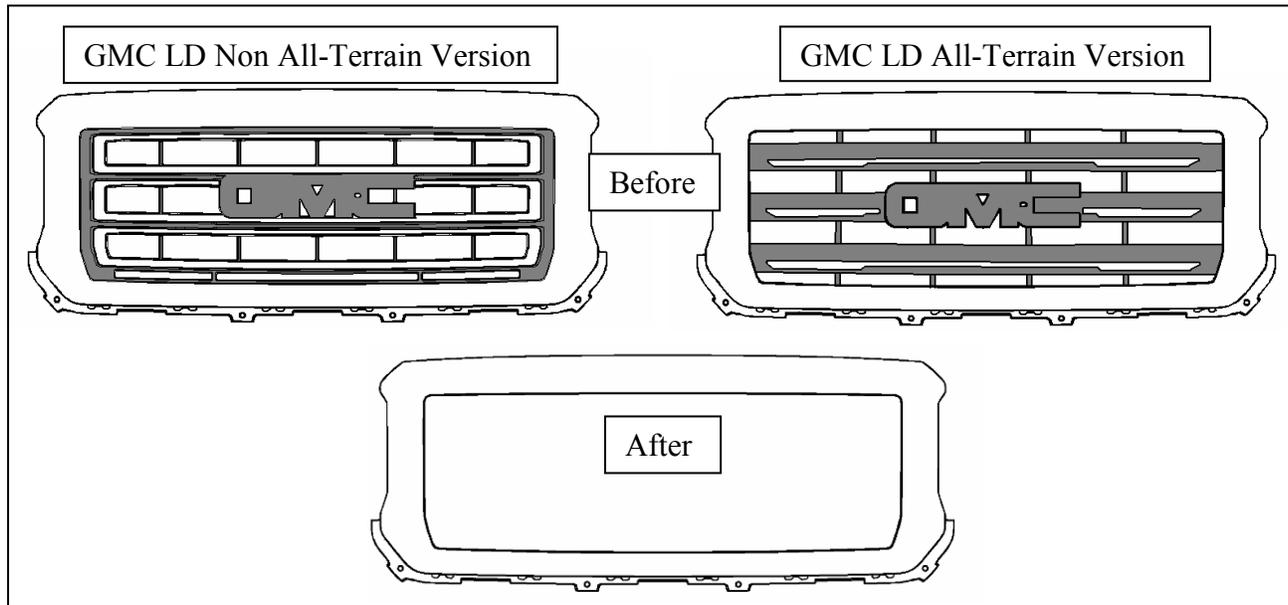

10. Cut inner portion of grille out. Part to remove from grille is shaded above

GMC LD Non All-Terrain Version

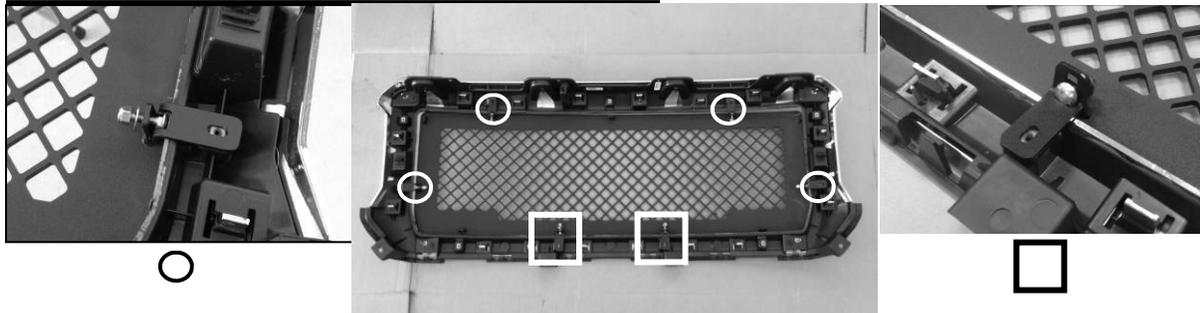

LIMITED 90 DAY WARRANTY

Putco guarantees its Stainless Steel and Aluminum products against defects in workmanship and material for as long as you own your vehicle. All painted products have a 90 day warranty on the painted surface. Any defects resulting from faulty material or workmanship will be warranted by Putco and repaired or replaced at our discretion. Putco assumes no extra labor costs. Damages caused by freight carriers, improper installation, misuse, collision, or neglect will not be warranted by Putco.

11. Insert Putco grille into the grille shell. Bolt on brackets to all the tab locations on back of Putco grille. Locations marked with a circle above match to orientation of the picture to the left. Locations marked with a square match the orientation of the picture the right. Hardware shown in pictures are included with the grille kit.
12. Tighten brackets to grille using 7/16" wrench. Use factory 7mm bolts that held the shroud on to grille to bolt Putco grille to grille shell through L-Brackets. (**Optional:** The original shroud can also be reinstall in this step, just bolt shroud over L-Brackets using factory 7mm bolts) Tighten Bolts.

For Lighted grilles, refer to Wiring Installation on Light Bar Installation Instructions for wiring instruction.

13. Once Putco grille is tightened in grille shell, bolt assembly back in truck and reassemble.

GMC LD All-Terrain Version

11. Insert Putco grille into the grille shell. Position grille in grille shell and mark holes through brackets for drilling. Remove Putco grille and drill 1/4" holes in locations marked.
12. Reinsert grille into grille shell and bolt in using supplied hardware. Bolt head goes against bracket on the back of the Putco grille. Tighten Down bolts using a 7/16" wrench
13. **Optional:** The original shroud can also be reinstall using factory bolts.

For Lighted grilles, refer to Wiring Installation on Light Bar Installation Instructions for wiring instruction.

14. Once Putco grilles is tightened in grille shell, bolt grille assembly back in truck and reassemble truck.

LIMITED 90 DAY WARRANTY

Putco guarantees its Stainless Steel and Aluminum products against defects in workmanship and material for as long as you own your vehicle. All painted products have a 90 day warranty on the painted surface. Any defects resulting from faulty material or workmanship will be warranted by Putco and repaired or replaced at our discretion. Putco assumes no extra labor costs. Damages caused by freight carriers, improper installation, misuse, collision, or neglect will not be warranted by Putco.