

INSTRUCTION GUIDE

Blade LED Tailgate Lightbar Instructions For 2019+ Ranger with LED and Halogen taillamps



1-800-247-3974

Monday-Friday 8:00am - 5:00pm (Central Standard Time) Contact your PUTCO® dealer for other quality accessories.



PLEASE READ ALL INSTRUCTIONS BEFORE INSTALLATION AND CHECK TO SEE THAT ALL PARTS ARE INCLUDED



QTY
1
1
4
4
1



INSTALLATION INSTRUCTIONS:

The factory wire harnesses are located on the frame rail, below each tail lamp.






- Depress tab and unplug factory harness. **Note: halogen tail lamp vehicle pictured** here. **LED tail lamp harness is in the same location but connector is different.**
- Plug the Blade Harness into factory wiring. Ensure plugs audibly "click" into place.
- Disconnect rear view camera plug(s) on driver's side frame rail. Remove tail gate. Clean mounting surface w/ isopropyl alcohol.
- Mount the Blade approximately 1" from bumper step pad. This is to ensure that the tail gate will not hit the Blade when open. Blade will be flush with top of the plastic lip of bumper (shown in next step). Route wires behind bumper and reinstall tailgate.



Blade Light Bar Instruction

6 Slowly open the tailgate and make sure that it does not hit the Blade at any point.

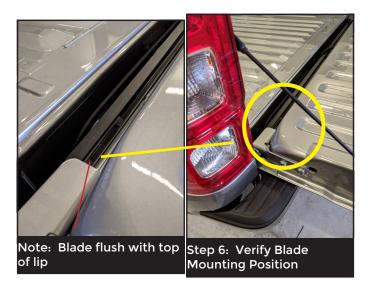



- Route the wires behind the bumper. Connect 4 pin connector and Weather Pack connectors to Blade Harness. Note: Putco recommends using di-electric grease on 4 pin connector to help keep connection water resistant. Zip-tie wires and Blade driver box in safe location, away from debris, hot exhaust pipes, or pinch points.
- Route the wires behind the bumper. Connect 4 pin connector and Weather Pack connectors to Blade Harness. Note: Putco recommends using di-electric grease on 4 pin connector to help keep connection water resistant. Zip-tie wires and Blade driver box in safe location, away from debris, hot exhaust pipes, or pinch points.



Your Putco Blade Led Lightbar is now installed!
Enjoy your new Putco product!