


# INSTALLATION INSTRUCTIONS

Form No.  
**8880**  
ECL-A

PLEASE READ ALL INSTRUCTIONS FROM START TO FINISH BEFORE YOU BEGIN THE INSTALLATION.

part numbers

- 520
- 521
- 522
- 523
- 524
- 624
- 532 — no sleeve
- 533 — no sleeve

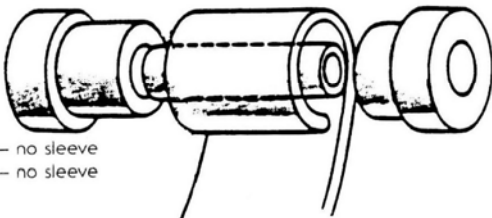


## BUSHING INSTALLATION INSTRUCTIONS


- A. Install sleeve into bushing using a small hammer and silicone spray.



- B. Place assembly A. over spring eye. spray with silicone and tap assembly into spring eye.



- C. Reverse spring so open end is up and spray silicone on tube and I.D. of eye. Tap remaining bushing into spring. Be sure tube is centered into bushing.



**NOTE:** Using a high quality grease on the shackle side of the bushings will reduce friction and increase ride quality.

**RANCHO**  
SUSPENSION®  
Revised 10/86


# INSTALLATION INSTRUCTIONS

Form No.  
**8880**  
ECL-A

PLEASE READ ALL INSTRUCTIONS FROM START TO FINISH BEFORE YOU BEGIN THE INSTALLATION.

part numbers

- 520
- 521
- 522
- 523
- 524
- 624
- 532 — no sleeve
- 533 — no sleeve

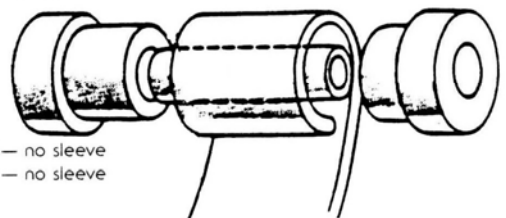


## BUSHING INSTALLATION INSTRUCTIONS


- A. Install sleeve into bushing using a small hammer and silicone spray.



- B. Place assembly A. over spring eye. spray with silicone and tap assembly into spring eye.



- C. Reverse spring so open end is up and spray silicone on tube and I.D. of eye. Tap remaining bushing into spring. Be sure tube is centered into bushing.



**NOTE:** Using a high quality grease on the shackle side of the bushings will reduce friction and increase ride quality.

**RANCHO**  
SUSPENSION®  
Revised 10/86