



**Installation Instructions
Ford Ranger/Bronco II
Front Dual Shock Kit
Part # DS220**


Part #	Description	Qty
DS280-LB	LEFT DUAL SHK BKT,RANGER	1
DS280-RB	RIGHT DUAL SHK BT,RANGER	1
38X1CTBG5	3/8 X 1 CRSE THRD BLT,GRD 5	4
38CTN	3/8-16 COARSE N/I LOCK NUT	4
38SAEW	3/8 SAE WASHER	4
12X512CTBG5	1/2 X 5 1/2 CRS THD BLT,GR5	2
12SAEW	1/2 SAE WASHER	8
12CTN	1/2-13 COARSE N/I LOCK NUT	2
DSS1234	DUAL SHOCK SPACER 1/2 X 3/4	2
I-DS220	INST. SHEET FOR DS220	1

NOTE: THE STEERING STOPS MAY NEED TO BE ADJUSTED AFTER THE INSTALLATION OF THIS DUAL SHOCK KIT TO AVOID INTERFERENCE WITH THE SHOCK WHEN YOU TURN FULL LEFT OR FULL RIGHT.

Installation Instruction:

1. Park the vehicle on level ground. Set the emergency brake and block the front tires.
2. Raise the Drivers Side of vehicle and remove the front tire. Remove the factory shock at the lower mount.
3. Position the new upper mount at the rear of the factory spring tower. See Illustration. Align the new upper mount so that the top of the mount is parallel to the ground and the two holes can be drilled into the spring tower. Drill the two holes into the upper spring tower and mount the bracket in place. Install the new shock into the new upper shock bracket. **NOTE: You may weld bracket in place if you prefer.**
4. Install bottom of shock using 1/2 x 5 1/2 bolt furnished as follows: Place a 1/2" washer on the bolt before putting it through the first shock. Insert bolt through outside shock, then install a washer, then a spacer and then another washer. Push bolt through the stock shock bracket, then through shock and radius arm. Install washer, nut then tighten.
5. Repeat the above steps on the opposite side.
6. Once all shocks are installed, check all components for proper clearance. Retorque all hardware after the first 100 miles and periodically there after.

Seat Belts Save Lives, Please Wear Your Seat Belt

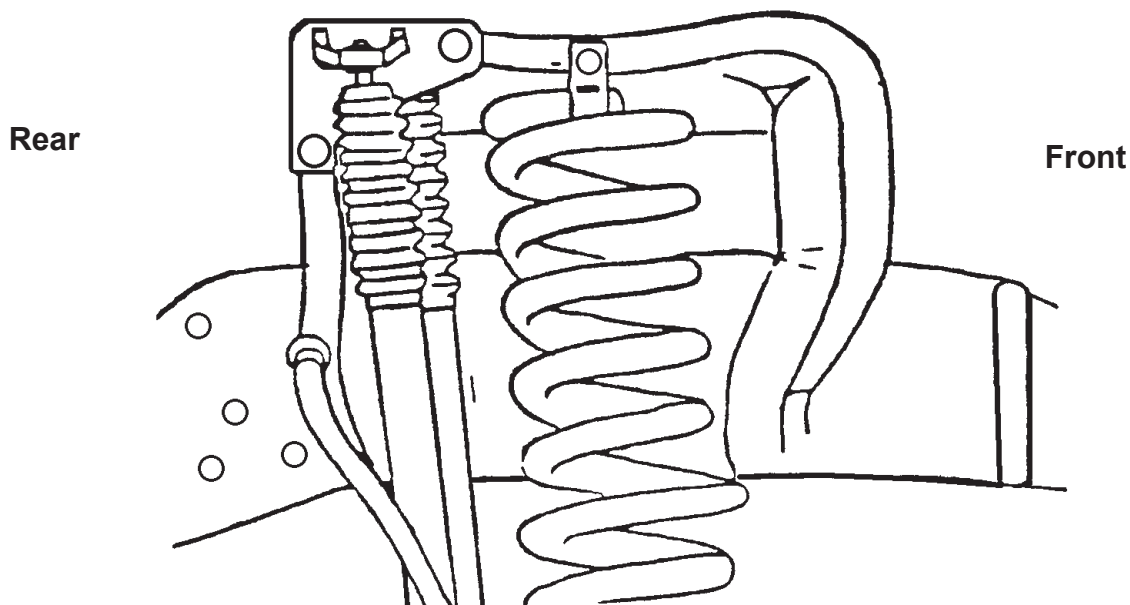

JESUS CHRIST DIED FOR YOU

John 3:16

For God so loved the world that He gave His only Son, so that everyone who believes in Him should not perish, but have everlasting life.

Romans 3:23

For all have sinned; all fall short of God's glorious standard.

Psalms 18:2

The Lord is my Rock, my fortress, and my savior; my God is my Rock, in whom I find protection. He is my shield, the strength of my salvation, and my stronghold.

STEPS TO ACCEPTING JESUS CHRIST AS YOUR PERSONAL SAVIOUR

God, I come to You admitting I have sinned against You and I need you to take control of my life. The Bible says anyone who calls on the name of the Lord will be saved. I am calling on You, Jesus. I ask that You come live in my heart and be the Lord over my life today. I do believe You died on the cross for me and came back to life to give me life!

Romans 10:9-10 says that if I confess with my mouth that Jesus is Lord and believe in my heart that God raised Him from the dead, I will be saved. Because it is by believing in your heart that you are made right with God, and it is by confessing with your mouth that you are saved.

Thank You, Lord Jesus for a new life in You!
Now, go and tell somebody about your
new life in Jesus.

