

LIT


E

S E R I E S

LIT


E

S E R I E S

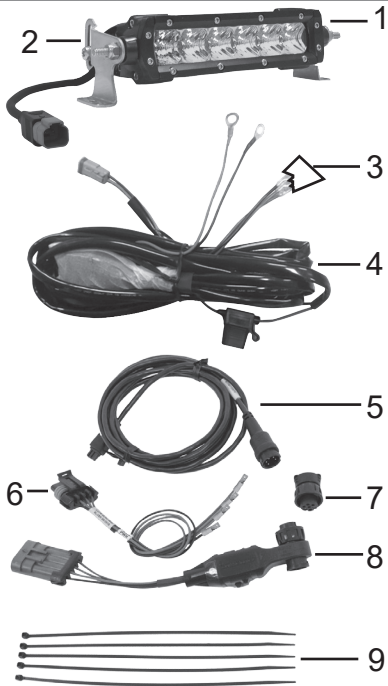

- 1 - LED Light
- 2 - Mount Hardware
- 3 - Toggle Switch (if not using Power Switch)
- 4 - Main Cable
- 5 - Display Adapter Cable
- 6 - Switch Adapter Cable
- 7 - Terminating Cap
- 8 - Power Switch
- 9 - Zipties


STEP 1 Install mount hardware to both sides of LED light as shown. Install the LED light on the vehicle using the remaining hardware.

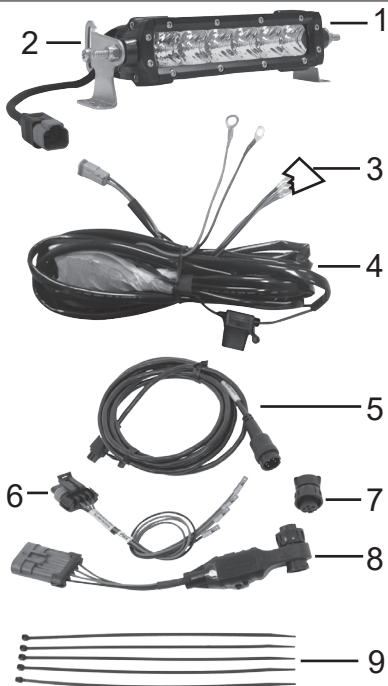

- 1 - LED Light
- 2 - Mount Hardware
- 3 - Toggle Switch (if not using Power Switch)
- 4 - Main Cable
- 5 - Display Adapter Cable
- 6 - Switch Adapter Cable
- 7 - Terminating Cap
- 8 - Power Switch
- 9 - Zipties


STEP 1 Install mount hardware to both sides of LED light as shown. Install the LED light on the vehicle using the remaining hardware.

STEP 2 Connect Main Cable connector to the LED connector.

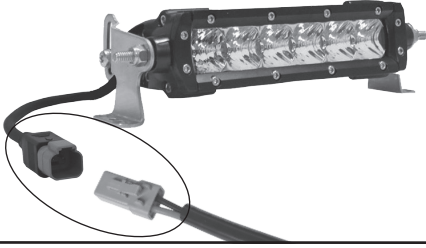


STEP 3 Connect the 3 color wires on the Main Cable to the 3 wires on the Switch Adapter.

Adapter	Main Cable
Black-----	Black
Red-----	Red
Blue-----	Blue
	Green

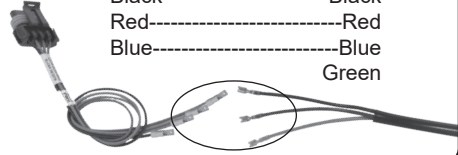


STEP 4 Insert the Adapter connector into the EAS connector as shown.

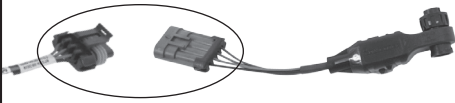

STEP 5 Align and insert the Display Adapter Cable and Terminating Cap into the Power switch connectors. Twist the nut on each to tighten the connections.



STEP 2 Connect Main Cable connector to the LED connector.

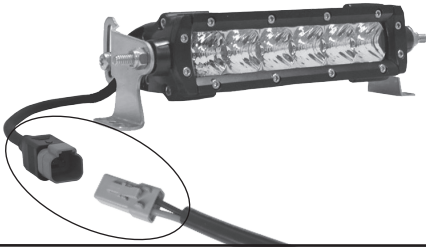


STEP 3 Connect the 3 color wires on the Main Cable to the 3 wires on the Switch Adapter.

Adapter	Main Cable
Black-----	Black
Red-----	Red
Blue-----	Blue
	Green



STEP 4 Insert the Adapter connector into the EAS connector as shown.

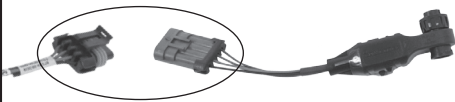

STEP 5 Align and insert the Display Adapter Cable and Terminating Cap into the Power switch connectors. Twist the nut on each to tighten the connections.



Before moving to the next step, double check the connections and route the cables accordingly. Use the zip ties to fasten the cables in place.

STEP 6 Connect the Red wire terminal to the Positive (+) side of the battery. Connect the Black wire to a suitable ground.



STEP 7 Plug the Display Adapter Cable into the already installed display device HDMI cable. For more information refer to the Display's User Manuals.



Copyright© 2018 Rev 00


For additional questions not found in this guide call:
Technical Support: (855) 292-2121, 8:00 am - 5:00 pm MST

Before moving to the next step, double check the connections and route the cables accordingly. Use the zip ties to fasten the cables in place.

STEP 6 Connect the Red wire terminal to the Positive (+) side of the battery. Connect the Black wire to a suitable ground.



STEP 7 Plug the Display Adapter Cable into the already installed display device HDMI cable. For more information refer to the Display's User Manuals.



Copyright© 2018 Rev 00

For additional questions not found in this guide call:
Technical Support: (855) 292-2121, 8:00 am - 5:00 pm MST