



Tighter machining tolerances and exact mesh gears eliminate oil pressure drop off at idle and allow for more constant and consistent oil pressure at any RPM.

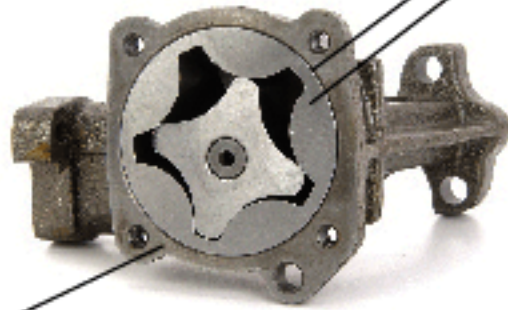

Precision machined sealing surfaces have a smoother finish to allow for proper sealing between the oil pump housing and the cover plate.

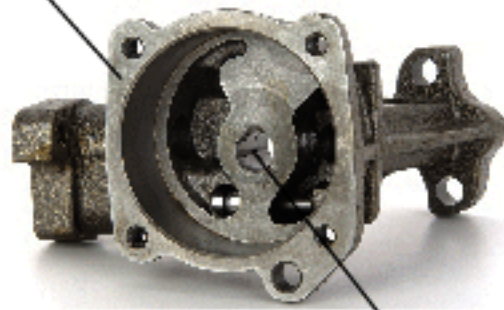

Full flow lubrication allows the driven shaft and gears to remain constantly lubricated while also providing a way for the aerated oil to escape.