Holley TUNING GROUP


Display Mounting Arm Installation Instructions

Ford 23+ F-Series

Installation of Display Mounting Arm

Included Materials

Ford 23+ F-Series

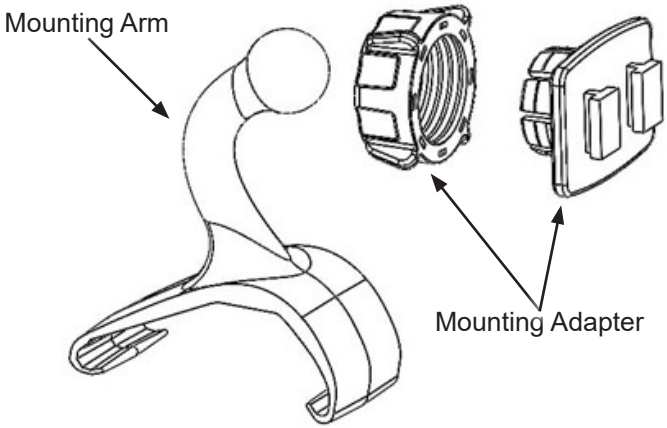

Required Tools

- Plastic Trim Tools


Installation

STEP 1 - Carefully remove the driver's side vent using plastic trim tools. There are four clips on the back of the vent and one Christmas Tree clip on the dashboard.



Installation Cont'd



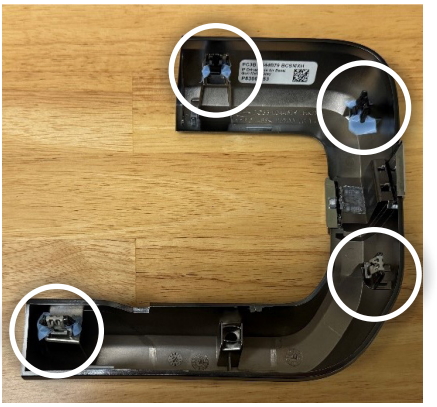

STEP 2 - Slide the display mount over the shorter leg of the trim piece. We recommend centering the display mount then adjusting the location once the trim piece is reinstalled.







STEP 3 - Center the trim piece with the Christmas tree clip and snap the rest of the trim piece back onto the vent.

Installation Cont'd

STEP 4 - Remove the dual tab and nut (black plastic parts) from the bag. If the dual tab and nut are screwed together, unscrew them slightly from one another until the nut moves freely.

STEP 5 - Snap the nut and dual tab over the ball over the ball on the display mount and tighten the nut (if the nut won't go onto the ball, the tab and nut may need to be unscrewed further).

STEP 6 - Attach your device to the dual tab and secure the cord. Adjust the device position by using the dual tab/nut and moving the display mount left or right.



PAGE INTENTIONALLY BLANK

PAGE INTENTIONALLY BLANK

PAGE INTENTIONALLY BLANK

For additional questions not found in the user guide, call:
Holley Technical Support: (888)-360-3343
Monday - Friday, 8:00 AM - 5:00 PM MST

To expedite your support call, please have your Vehicle Information, Part Number, and Serial Number ready prior to calling Technical Support.

Copyright © 2025 Holley Inc. and subsidiaries. All rights reserved.
D10034300 Rev00 01/23/2025