




GODZILLA TRUCK NORRIS

FORD GODZILLA 7.3L APPLICATIONS

INTAKE DURATION @.050"	222 °	ROCKER ARM RATIO	1.8 :1
EXHAUST DURATION @.050"	234 °	NET LIFT INTAKE	0.641 "
LOBE LIFT INTAKE	0.356 "	NET LIFT EXHAUST	0.644 "
LOBE LIFT EXHAUST	0.358 "	LOBE SEPARATION ANGLE	110 °
INTAKE LOBE LIFT @ T.D.C.	0.081 "	MAX RECOMMENDED ENGINE (RPM)	6400

REV.0

CAM SKU: BTR-GZTN							SEE TIMING CHAIN DIAGRAM ON REVERSE SIDE						
VVT LIMITER REQUIRED:			BTR-VVT-GZ-8CAM				ACTUAL SPECS MAY VARY*						
VVT TARGET TABLE (HolleyEFI Style)													
RPM	3000	3250	3500	3750	4000	4250	4500	4750	5000	5250	5500	5750	6000+
VVT CRANK DEG	0.0	4.0	4.0	4.0	4.0	4.0	4.0	5.0	7.0	10.0	10.0	12.0	13.0

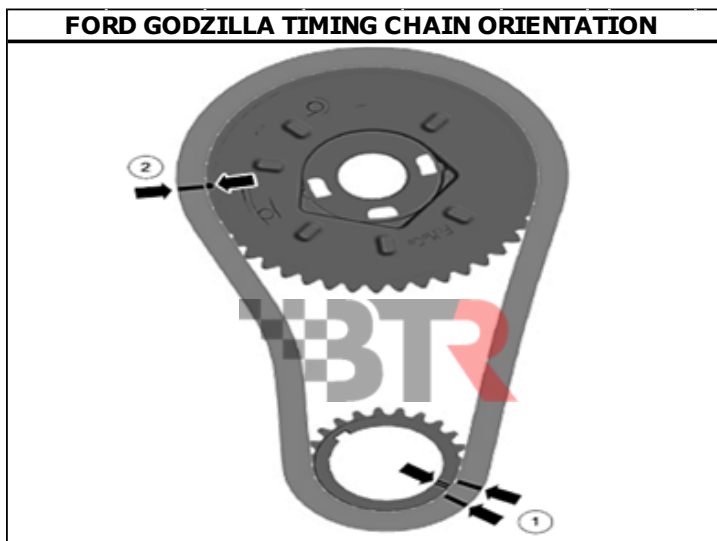

IMPORTANT NOTE:

BE SURE TO THOROUGHLY CLEAN CAMSHAFT, INCLUDING THE CENTER, AND APPLY ASSEMBLY LUBE BEFORE INSTALLATION



FOR MORE SPECS AND TECHNICAL INFO SCAN THE QR CODE OR VISIT:

BRIANTOOLEYRACING.COM/TECHNICAL