




LTx DOD DELETE

GM GEN V LT APPLICATIONS

INTAKE DURATION @.050"	200 °	ROCKER ARM RATIO	1.8 :1
EXHAUST DURATION @.050"	208 °	NET LIFT INTAKE	0.550 "
LOBE LIFT INTAKE	0.305 "	NET LIFT EXHAUST	0.521 "
LOBE LIFT EXHAUST	0.290 "	LOBE SEPARATION ANGLE	116.5 °
INTAKE LOBE LIFT @ T.D.C.	0.037 "	FUEL LOBE	STOCK L86

REV.3

CAM SKU: BTR-2240006175							SEE TIMING CHAIN DIAGRAM ON REVERSE SIDE						
											ACTUAL SPECS MAY VARY*		
VVT TARGET TABLE (NOTE: FOR HolleyEFI STYLE TABLES, MULTIPLY VALUES BY 2 FOR CRANK DEGREES)													
RPM	2800	3000	3200	3400	3600	3800	4000	4200	4400	4800	5200	5600	6000+
(CAM DEG)	0.0	2.0	2.0	2.0	2.0	3.0	3.0	4.0	5.0	5.0	8.0	8.0	8.0

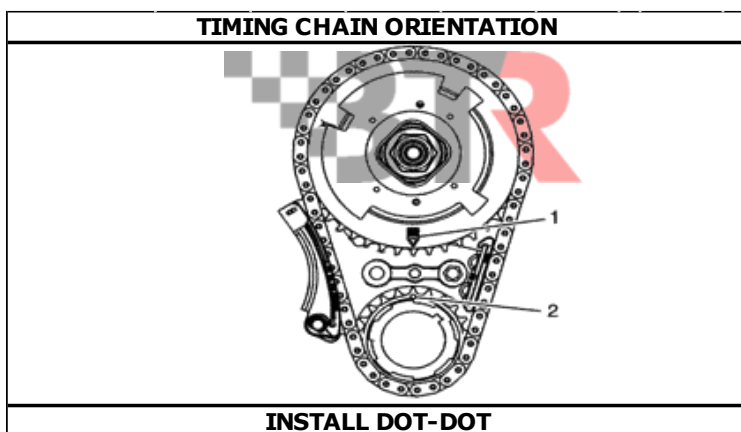

TORQUE SPECIFICATIONS	
CAM SPROCKET (VVT-BOLT)	(48 FT/LBS) + 90°
CAM RETAINER PLATE BOLT	11 FT/LBS

IMPORTANT NOTE:
BE SURE TO THOROUGHLY CLEAN CAMSHAFT, INCLUDING THE CENTER, AND APPLY ASSEMBLY LUBE BEFORE INSTALLATION



FOR MORE SPECS AND TECHNICAL INFO SCAN THE QR CODE OR VISIT:
BRIANTOOLEYRACING.COM/TECHNICAL