


Installation – Boost Tube (1057051)

For installation of the boost tube (if you received it with the 1057020), locate the red air line connected to the wastegate of the turbo. Place the boost tube in between of the wastegate and the air line, and reattach to wastegate. We have found that vehicles using the boost tube consistently run cooler with more boost.



Installation – Boost Fooler (1057020)

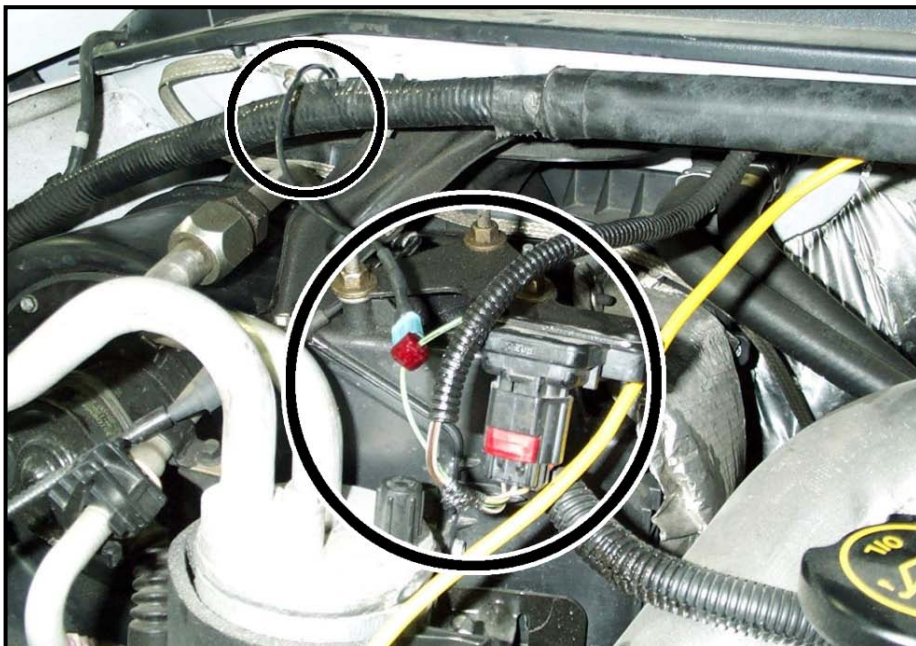

To install the electronic boost cut-off, locate the map sensor located on the passenger side of the engine compartment near the rear. Attach the T-Tap or Posi-Tap to the center wire (Light Green/Black trace) and connect the other end to the chassis ground nearby. This device prevents the SES light (high boost code) from appearing.



BD Engine Brake Inc.

Plant Address: 33541 MacLure Rd. Abbotsford, BC, Canada V2S 7W2

U.S. Shipping Address: 88-446 Harrison St, Sumas, WA 98295 U.S. Mailing Address: P.O. Box 231, Sumas, WA 98295 Phone: 604-853-6096 | Fax: 604-853-8749 | Internet: www.bd-power.com