



GT for Jeep® QUICK INSTALL GUIDE

Not legal for sale or use in California on pollution-controlled vehicles.

MORE GREAT BULLY DOG PRODUCTS

More info on Bully Dog products can be found on our website at bullydog.com


Sensor Docking Station



Accessories

A: PRE-INSTALL CHECKLIST


Confirm that you have all the parts listed below, and then update your GT (B).



Adapter Plug



Mini USB Cable



SD Card Reader



SD Card



Windshield Mount



HDMI Cable




Power Cable



Fuse Spade



Fuse Tap



GT Head Unit

Tools You May Need:

Fuse Puller
Voltage Tester
Battery Charger
Pliers

B: UPDATE YOUR GT


1. Install the Update Agent on a Windows computer.

(www.bullydog.com/update_agent.php)




2. Plug in the card reader.

Plug the microSD card into the reader, and plug the reader into one of your computer's USB ports.

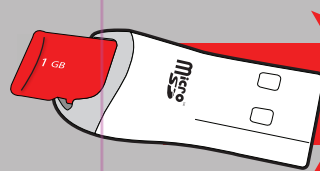


3. Open the Update Agent

Launch the Update Agent from the Windows Start menu if it isn't already open.

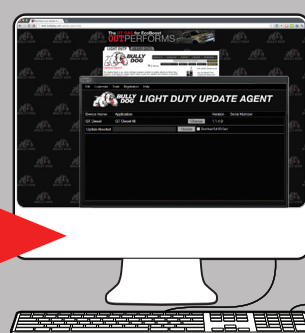


4. Select your vehicle on the Update Agent using the "Change" button.

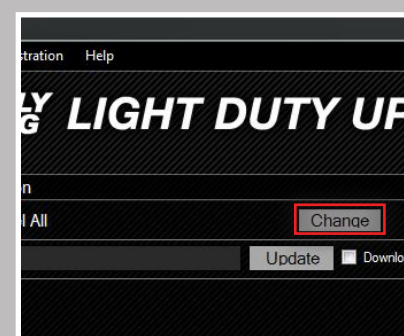

5. Select "Update".


Once the Agent indicates that the update is complete, place the MicroSD card into your GT and proceed with installing your GT (C).

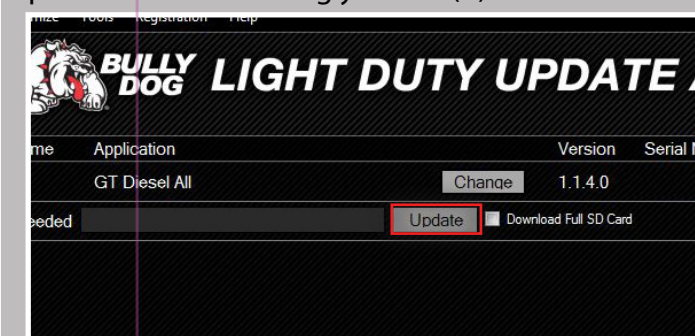

C: PHYSICAL INSTALLATION

1. Locate a key-on fuse.

- It only has power when the key is in the "on" (or "run") position.
- Use a 12 volt test light or your vehicle owner's manual to locate one.

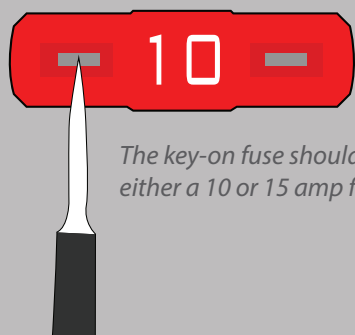


The key-on fuse should be either a 10 or 15 amp fuse.

2. Connect the power cable.


- Crimp the fuse spade onto the power wire.
- Remove the fuse.
- Slide the fuse tap over one metal prong of the fuse.
- Slide the fuse spade over the fuse tap and put the fuse back in the fuse box.

The black ground wire inside the power cable is not required.

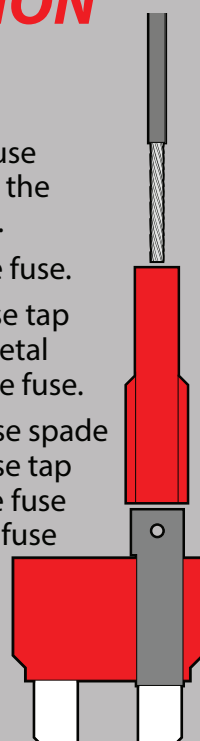


3. Connect the adapter plug.

- Find your vehicle's diagnostic port (OBDII) under the dash.

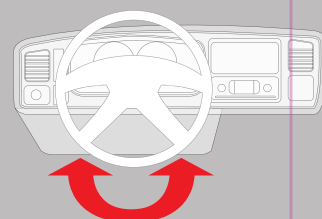


- Connect the GT adapter plug to the port.
- Run the power cable from the fuse box and connect it to the adapter plug.

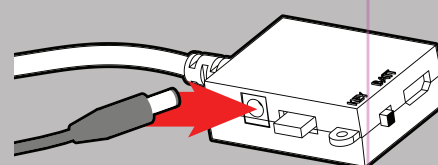


4. Install the HDMI cable.


- Slide the switch on the adapter plug to "BATT"

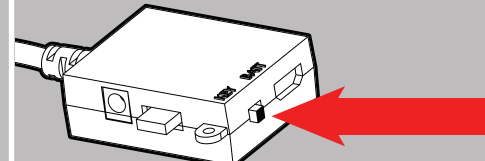

- Connect one end of the HDMI cable to the adapter plug.

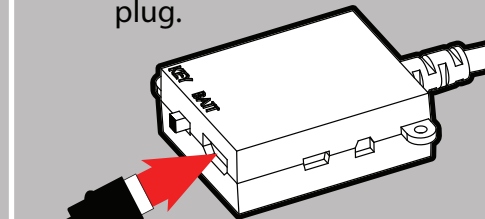


- Run the cable under the dash or weather stripping.

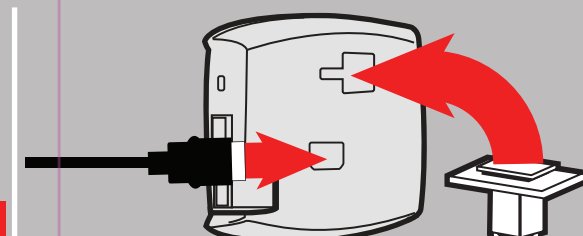

5. Mount and connect the GT.

- Use the windshield mount to attach the GT head unit to the windshield in a safe place.
- Make sure not to obstruct the driver's view.
- Connect the HDMI cable to the GT head unit and then begin the pre-tune checklist (D).

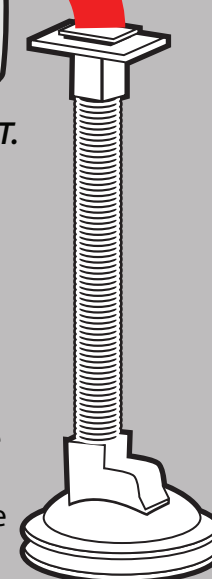

D: PRE-TUNE CHECKLIST

1. Business hours

Install during regular business hours (Monday-Friday 8am-5pm MST). For assistance, you may contact Bully Dog Technical Support at 940-783-9915.

2. Check fuses

Check the included red fuse card if you have a GM vehicle.

3. Internet access

In the unlikely event that technical support is needed, Internet access may be required to troubleshoot.

4. Allow enough time

Make sure you have at least an hour to complete the installation process.

5. Check your battery

Before installation, ALWAYS ensure that the batteries are fully charged. If you are not sure, connect a battery charger before you begin installation.

6. Turn electronics OFF

Leaving electronics on (stereo included) may prevent a successful download.

7. The download

Do not interrupt or disconnect the GT at any point during the download. Leave electronics off during the entire process. Proceed to (E).


E: GT DOWNLOAD (PART 1)

1. Turn your key to the "on" (or "run") position.

- Do NOT start the engine.




2. Choose "Change Vehicle" from the Main Menu.

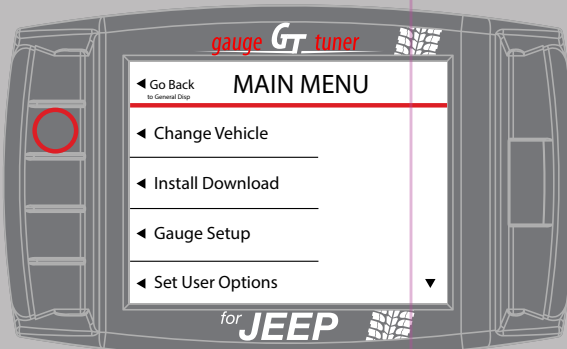


3. Select the vehicle model, engine and year.

- The GT will load files and restart.

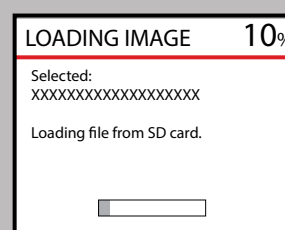

4. Choose "Install Download" from the Main Menu.

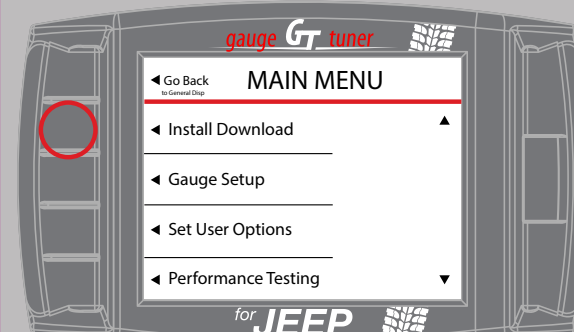


5. Verify the vehicle type.




6. Read the disclaimer and press "Agree."



7. Read the battery disclaimer and press "Agree."

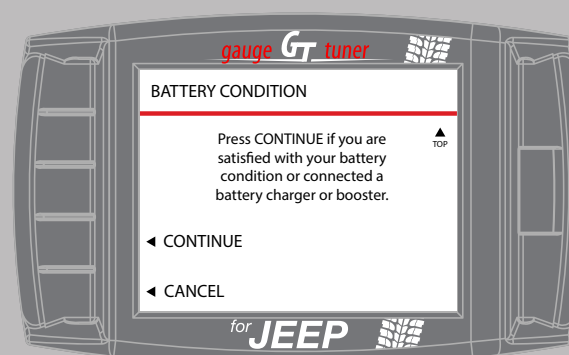

8. The GT will retrieve vehicle data.

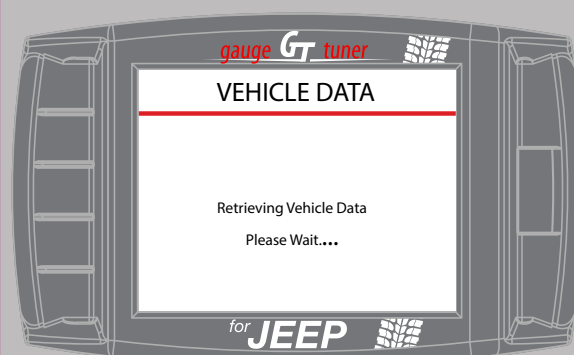

F: GT DOWNLOAD (PART 2)

1. The GT will display code 262.

- Remove the microSD memory card from the GT.
- Connect it to the computer with the included card reader.



Steps 2-4 must be completed outside the vehicle on a computer with Internet access.

2012-2013 Wranglers only; for all other vehicles, skip to H-1.

2. Open the Bully Dog Update Agent.

- <http://www.bullydog.com/domains/updateagent/setup.exe>

3. Connect the microSD memory card to the computer.

- Use the included card reader and a USB port on the computer.



4. The Update Agent will display a progress bar as it gathers files.


- When the Update Agent displays a message that the process is complete, click OK.

G: GT DOWNLOAD (PART 3)

2012-2013 Wranglers only; for all other vehicles, skip to H-1.

Steps 1-4 are must be completed with/inside the vehicle.

1. Reinstall the microSD memory card in the GT.

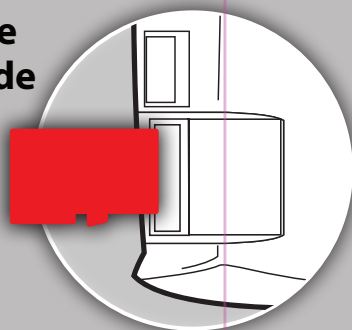


2. Choose "Install Download" from the Main Menu.

3. Read the disclaimer and press "Agree."

4. Read the battery disclaimer and press "Agree."

5. The GT will begin the initial download.

- This will take several minutes.
- Do not interrupt the GT.
- Follow the onscreen instructions.

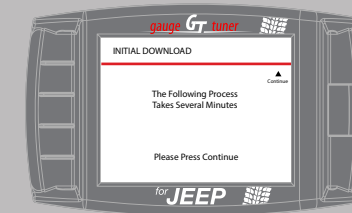


6. Once the GT has completed the initial download, skip to step H-2.

H: GT DOWNLOAD (PART 4)

1. The GT will read the engine files.

- This will take several minutes.
- Do not interrupt the GT.
- Follow the onscreen instructions.


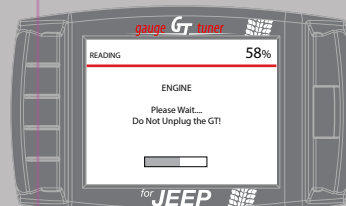


2. The GT will prompt you to select tuning features:

- Power Level
- Drive Rev. Limiter
- Neutral Rev. Limiter
- Speed Limiter
- MDS (if available)
- Adjust WOT Shift Points (if available, automatic transmissions only)
- Tire Size
- Axle Ratio

3. The GT will build and download the tuning file.

- Do not interrupt the GT.

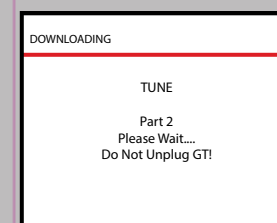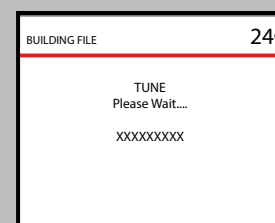

5. When the GT has finished installing the tuning file, the download is complete!

- Slide the switch on the adapter plug to "KEY"