

Thank you for your purchase.

Please read the complete installation instructions or view the video instructions on YouTube before attempting to install this product.

 If not installed properly, PowerMAX will not function and may be damaged. View install videos at www.jms-powermax.com

PowerMAX Voltage Booster-Regulator will increase the output of any fuel pump or ignition system. The PowerMAX unit has been designed to be mounted inside the vehicle cabin (*under a seat*) or in the trunk. Install the unit so it does not come into direct or prolonged contact with water or extreme engine heat (+250F).




Reasons to choose PowerMAX!

	FuelMAX Single PM-2000	FuelMAX Boost-Single PM-2009-B	FuelMAX Dual-Pump PM-2020	FuelMAX Dual-Boost PM-2029-B	SparkMAX 25V PM-2100	SparkMAX 31V - Race PM-2100-R31	SparkMAX Boost - 25V PM-2109-B
<i>Ford • Plug and Play</i>	X	X	X	X			
<i>User Adjustable Output Voltage & Voltage Ramp In/Out Rate</i>	X	X	X	X	X	X	X
<i>Highest Voltage Output & Highest Amperage Output</i>	X	X	X	X	X	X	X
<i>Single Output Wiring • Fuel Pump or Ignition • 40AMP Fuse</i>	X	X			X	X	X
<i>Dual Fuel Pump Wiring • 80AMP Fuse</i>			X	X			
<i>Heaviest Gauge Wiring & Highest Capacity Fuse • 40/80AMP</i>	X	X	X	X	X	X	X
<i>Enable via Ground or via (0-5v) External Voltage • via MAP, TPS or PPS Sensor</i>	X		X		X	X	
<i>Voltage Ramp In/Out • User Selectable • Adjustable Based on Time or Voltage</i>	X		X		X	X	
<i>JMS Exclusive • Digital Technology</i>	X	X	X	X	X	X	X
<i>Enable via Internal Boost Sensor • Pressure Range (1-29psi)</i>		X		X			X
<i>Voltage Ramp In/Out • User Selectable • Adjustable Based on Time or Boost</i>		X		X			X
<i>Widest Pressure Adjustment Range Available • (1-29psi)</i>		X		X			X
<i>Industrial Heat-Sink • Heavy-Duty Construction</i>	X	X	X	X	X	X	X
<i>Easy to Use • Instructions On the Unit</i>	X	X	X	X	X	X	X
<i>Option • Remote Knob</i>	X		X		X	X	

The concept behind boosting the voltage of your fuel pump or fuel pump driver?

- Reliably use the factory fuel pump to support additional horsepower.
- 2011+ Mustang GT customers have reported making +925rwhp with the stock fuel pump and a FuelMAX.
- Shelby GT500 customers have reported making +1050rwhp with the stock fuel pumps and dual FuelMAX.
- SVT Raptor customers have reported making +750rwhp with the stock fuel pump and a FuelMAX.
- Camaro customers have reported making +800rwhp with the stock fuel pump and a FuelMAX.
- Nissan GTR customers have reported making +1000rwhp with the stock fuel pump and a FuelMAX.
- Boost fuel pump voltage *ONLY* when the extra fuel volume is needed.
 - Keep your fuel cool and reduce or eliminate the chance of vapor lock.
 - No need to upgrade the factory fuel pump or fuel lines.
 - Eliminate the gasoline smell associated with aftermarket fuel systems.
 - Enable Voltage Boosting via either Ground and external pressure switch or via external 0-5 volt sensor signal
- Simple to install: Choose from either *Plug and Play* or *Universal Single Wire* splice in design
 - Plug and Play for most 2011-2014 Fords: Mustang GT and Shelby (Anyone can quickly and easily install)
 - Plug & Play units activate voltage boosting via Accelerator Pedal Position (Can also use ground activation)
 - Universal: If you can cut and splice a single wire then you can install a universal PowerMAX FuelMAX.
 - Universal units activate voltage boosting via Ground or a monitored 0-5 volt sensor signal

FuelMAX PM-2000-PPM11 Wiring • Ford Plug & Play Activation via 0-5 volt sensor • Pedal Monitor

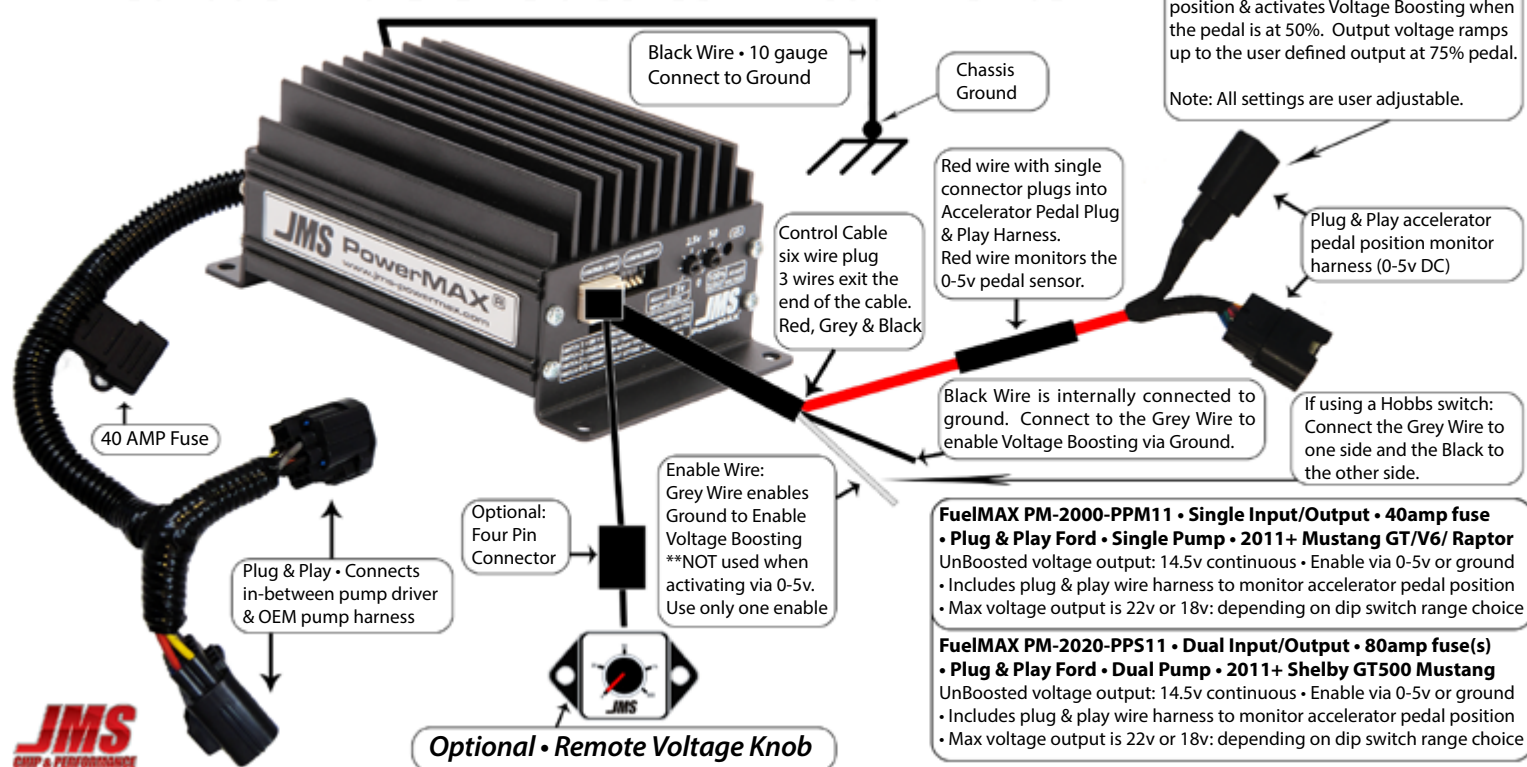

Installation Instructions • PM-2000-PPM11 • PM-2020-PPS11 • Plug & Play

PM-2020-PPS11
Dual Plug & Play



JMS Plug & Play
FPDM Harness



Close up
of Plug & Play



Pedal Position
Monitor Harness



Control Harness




Single - Plug &
Play install kit



Installation Instructions • PM-2000-PPM11 • PM-2020-PPS11 • Plug & Play

STEP 1 - LOCATE THE FUEL PUMP DRIVER MODULES

- Verify that the vehicle is turned off (no key in ignition).
- Locate the Fuel Pump Driver Module or Modules
- The Fuel Pump or Fuel Pump Driver Module is typically located in the trunk or possibly in or near the fuel tank.
- Shelby GT500's utilize two fuel pump driver modules. Shelby's use pn: PM-2020-PPS11 or two PM-2000's. We also offer a Shelby wiring upgrade for high hp vehicles.
- Tip: Typically newer cars (2000-up) utilize a fuel pump driver module to drive the fuel pump. FuelMAX boosts the voltage to the fuel pump driver module and this increases the fuel flow from the fuel pump.

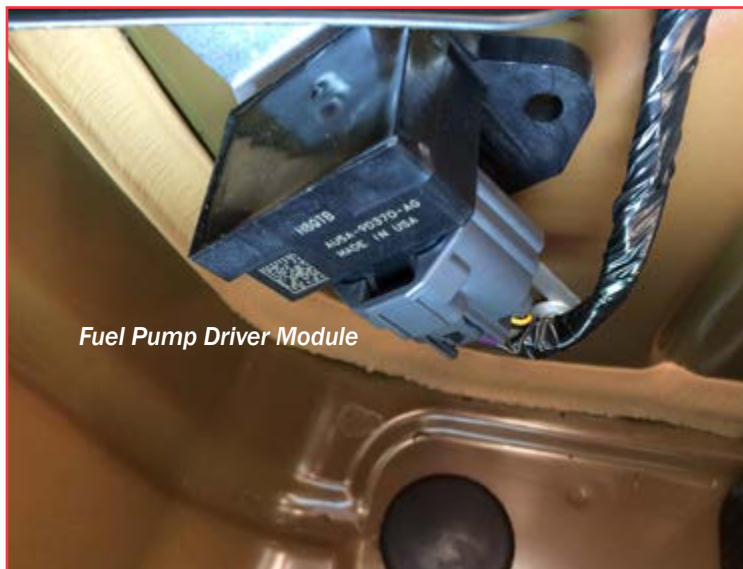

Fuel Pump Driver Module

STEP 2 - CONNECT THE JMS PLUG & PLAY HARNESS

- Install the JMS Plug & Play Fuel Pump Driver Module harness in-between the factory harness and the fuel pump driver module.
- Connect the two pin connector to PowerMAX.
- Tip: To remove the OE Pump Driver Plug you press and hold the tab and remove the connector plug.



OE FPDM Connector

JMS Plug & Play FPDM harness connected to OE harness

Two Pin Connector goes to PowerMAX

STEP 3 - SECURE THE GROUND WIRE

- The Black Wire is Pre-Crimped with a Yellow Ground Ring.
- Terminate the Black Wire to a factory ground chassis ground point.



Secure the ground to a factory point

Installation Instructions • PM-2000-PPM11 • PM-2020-PPS11 • Plug & Play

STEP 4 - UPGRADE THE FUEL PUMP FUSE

- Most vehicles have a single pump and a single fuse.
- Locate and replace fuse or fuses that provide +12v to the fuel pump driver module(s). Replace the stock fuse or fuses with 30amp versions.
- Tip: 2007 - 2010 Shelby Vehicles utilize two fuses.
- Tip: 2011 - 2012 Shelby GT500 vehicle utilize a single fuse. To support big hp on the 2011-12 Shelby: Use the JMS Shelby Fuel Pump Wiring Upgrade. This upgrade easily supports the amperage requirements required to make big horsepower.
- Tip: 2013 - 2014 Shelby Vehicles utilize two fuses (circuit 13 & 14 shown in RED in the picture to the right)



STEP 5 - MOUNT THE UNIT

- Utilizing self-taping screws to mount FuelMAX (included)
- Mount the unit so that the switches and knobs can easily be seen and adjusted by the user.
- Make sure that the mounting location leaves you with enough excess wire so none of the connections are under strain.
- Pay attention to where you are mounting the unit (avoid drilling into the factory fuel lines, brake lines or wire harness).
- Be sure to mount the unit away from extreme heat and direct contact with water.
- Typically the unit is mounted inside the vehicle cabin or trunk.
- Verify that the two pin connector is plugged into PowerMAX.




STEP 6 - CONNECT & ROUTE THE CONTROL CABLE

- Plug the six-wire control cable into the unit and route the wires to the front of the vehicle.
- Route the wires inside the car and up to the accelerator pedal area. (Located under the driver's side of the dashboard)
- Secure the wires with the included tie-straps.
- PowerMAX monitors the accelerator pedal position and the increase in output voltage is directly proportional to the pedal.
- Voltage Boosting starts around 1/2 pedal and ramps up to full voltage output around 3/4 pedal.





STEP 7 - CONNECT PEDAL POSITION MONITOR CABLE TO THE POWERMAX CONTROL CABLE

- Connect the Single Position Pedal Position harness into the main Six-Wire Control Cable (red wire/black connector).
- Look for the alignment tab and plug the two connectors together. Make sure that the connector latches.

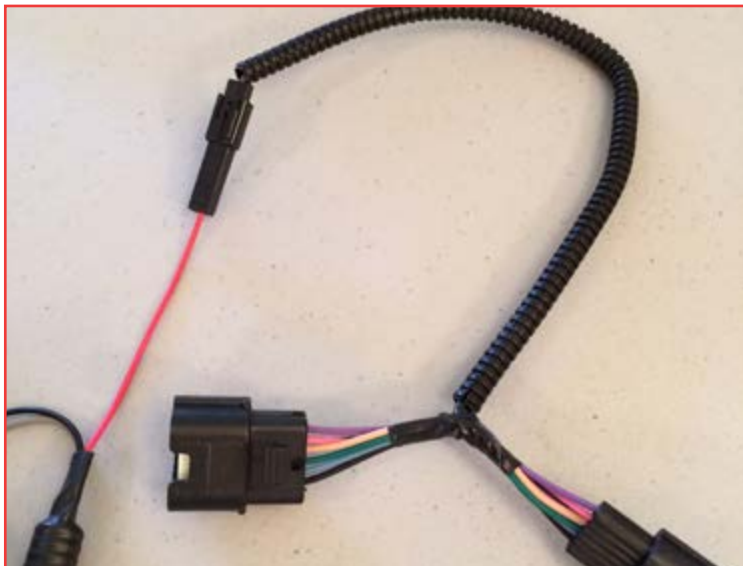

STEP 8 - CONNECT PEDAL POSITION MONITOR CABLE TO THE ACCELERATOR PEDAL AND OE PEDAL HARNESS

- Verify that the vehicle is turned off (no key in ignition).
- Locate the accelerator pedal and pedal position sensor under the driver's side of the dashboard.
- Install the pedal position harness in between the factory harness and the accelerator pedal position sensor.
- Use tie-wraps to tie up and secure any wires that are hanging down from under the dashboard.

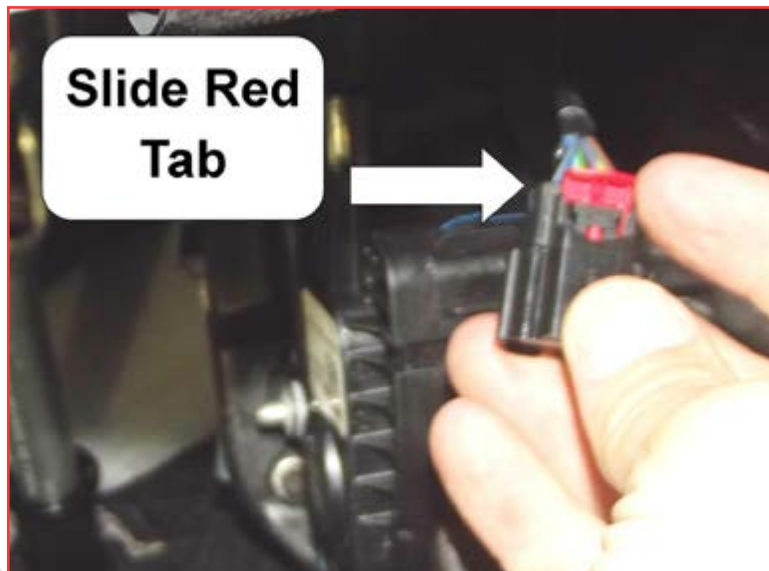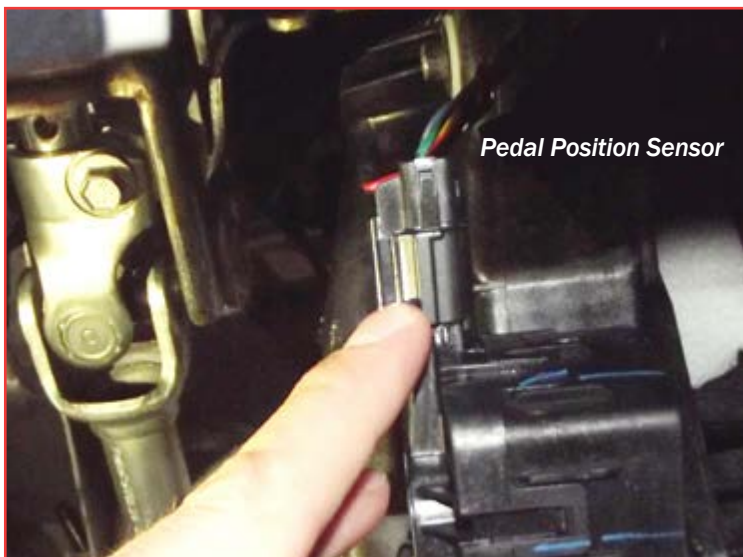

STEP 9 - VERIFY THAT THE UNIT POWERS ON

- Green LED will illuminate ON (solid), when the ignition key is set in the "ON" position.

- The Green LED will slowly blink when the unit is Boosting Voltage and the unit is enabled via the Pedal Position Sensor.

Tip: With the vehicle's engine not running, you can quickly test and set the Boosted Voltage output by holding the accelerator pedal to the floor, turn the ignition key to the ON position, Turn Dip switch 1 - ON and adjust the Adjust Output Voltage Pot.

Monitor the white wire boosted output with a Digital Volt-OHM Meter. Set the DVOM range to: 20v DC.



STEP 10 - ADJUST THE BOOST VOLTAGE AND RANGE

- Set the Boosted Output Voltage & options via the front panel configuration switches and knobs.

- Set the Ignition Key to the "ON" position • (Power ON = Green LED is ON [illuminated ON])

- Set Dip Switch 1 - "ON" (Switch 1 "ON" - Enables the configuration of the front panel switches and knobs)

- Set Dip Switch 2 - Choose the voltage output range. OFF = 18v, ON = 22v

- Adjust Voltage Output - 0 = 14.5v, 100% = Maximum for the selected voltage range.



STEP 11 - SAVE THE BOOST OUTPUT VOLTAGE SETTING

- Set Dip Switch 1 - "OFF" When SW 1 is moved from ON to OFF, the current front panel switch and voltage settings are saved & the LED twinkles.

- Tip: When saving configuration settings, the unit must be powered ON and Dip Switch 1 set to ON. Make your changes and turn OFF Dip Switch 1 to save your switch settings/changes. (Notice that the LED will twinkle when Switch 1 is Turned OFF and the config values are saved).

- Tip: When saving, you must leave Switch 1 ON for a few seconds before you can turn it off and update the Saved Config values.



Dip SW 1 - Turn OFF to Save LED Twinkles when saving the front panel settings

STEP 12 - SETUP PEDAL POSITION ACTIVATION

Unit comes PRE-SET with the following Pedal Configuration.

This configuration starts Voltage Boosting at just over 1/2 pedal and ramps into full output by 3/4 pedal.

- Set the Ignition Key to the "ON" position. (Green LED ON)
- Set Dip Switch 1 - "ON". (Switch 1 "ON" - Enables the adjustment of the front panel switches and knobs)
- Adjust Input Trigger, set to: "2.4v". (Sets voltage boosting start point @ 2.4v [set just under 2.5V mark])
- Set Dip Switch 3 - "ON". (Sets the ramp type to 0-5 volt)
- Set Dip Switch 5 - "ON". (Sets the voltage ramp over 0.8v: max voltage boosting ramp end point @ 3.2v)
- Set Dip Switch 1 - "OFF". (Saves the front panel switch settings, LED twinkles while saving)



STEP 13 - SAVE THE FRONT PANEL SETTINGS

- Set Dip Switch 1 - "OFF" (When moved from ON to OFF, this Saves the current front panel switch and voltage settings & the LED twinkles while saving)
- Tip: When saving configuration settings, the unit must be powered ON and Dip Switch 1 set to ON. Make your changes and turn OFF Dip Switch 1 to save your switch settings/changes. (Notice that the LED will twinkle when Switch 1 is Turned OFF and the config values are saved).
- Tip: When saving, you must leave Switch 1 ON for a few seconds before you can turn it off and update the Saved Config values.




STEP 14 - VERIFY THAT VOLTAGE IS BOOSTED WHEN EXPECTED (AT JUST ABOVE HALF PEDAL)

- Verify that Voltage is boosted at the expected Pedal Position.
- Setup pedal position activation and the boosted output voltage. (Follow the procedure in step 12)
- Set the Ignition Key to the "ON" position. (Green LED ON)
- Depress the Accelerator Pedal to the floor. (Wide Open Pedal). Verify that the LED is blinking slowly.
- LED should only start blinking when the Accelerator Pedal is pressed just past the 1/2 way point. When the pedal drops past the 1/2 way point the Green LED should stop blinking.
- Boosted Voltage Output is proportional to the Accelerator Pedal Position. (Start boosting 1/2 pedal, Full boosting 3/4 pedal).

Accelerator Pedal
Voltage Boosting occurs at just above 1/2 pedal.
Green LED blinks when boosting



Reference guide to the PowerMAX front panel

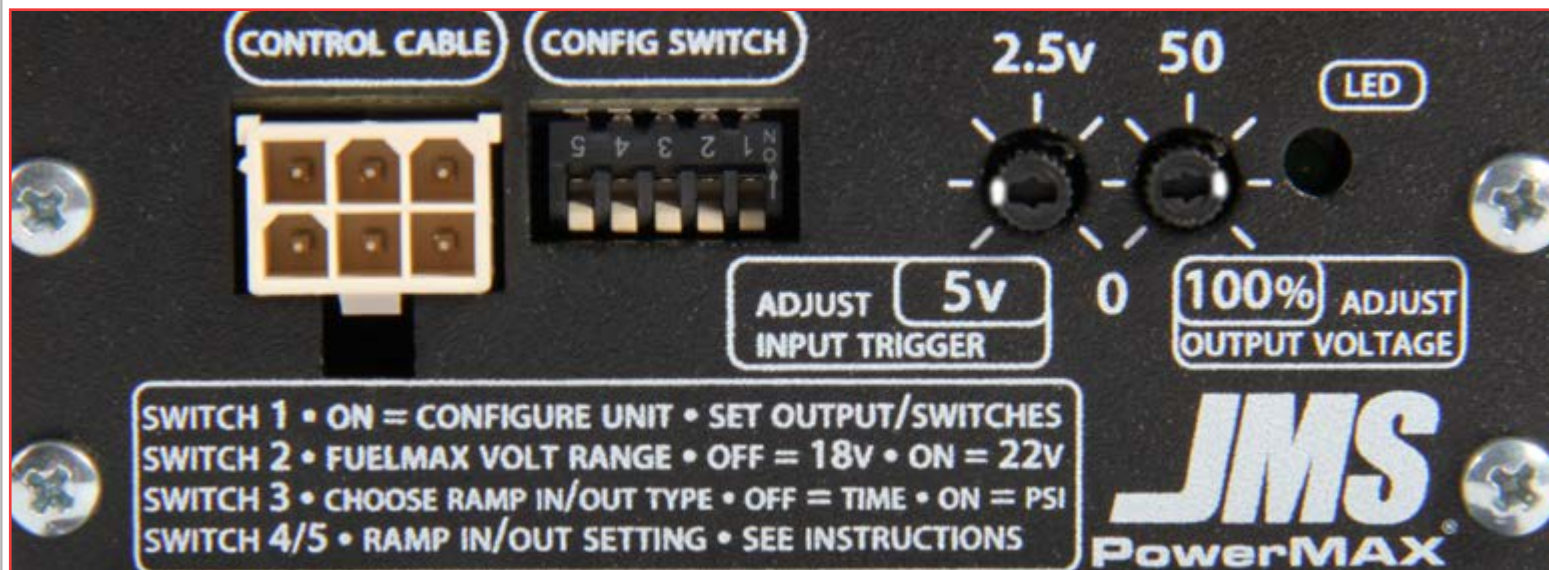

Set Dip Switch 1 ON to ADJUST boosted output voltage: Set via Adjust Output Voltage Knob.

Adjust Output Voltage: 0 = 14.5v boosted output; 100% = 18v or 22v boosted output (depending on the range: dip switch 2)

Remember: Dip Switch 1 must be ON to ADJUST dip switches or knob settings on the front panel.

When Dip Switch 1 is turned OFF: LED will twinkle and ALL of the front panel settings are saved.

DIP SWITCH 1	DIP SWITCH 2	DIP SWITCH 3	DIP SWITCH 4	DIP SWITCH 5
Configure Unit	Set Voltage Range	Choose Ramp Type	Depends on SW 3	Depends on SW 3
OFF = Save Settings	OFF = 18V Range	OFF = Time Based	See tables below	See tables below
ON = Set Voltage/Config	ON = 22v Range	ON = 0-5v Based	See tables below	See tables below

Time Based Voltage Ramp
Works with either Gnd or 0-5v

	DIP SWITCH 3	DIP SWITCH 4	DIP SWITCH 5	GROUND ENABLE	VOLTAGE ENABLE
Time - Immediate Ramp 0	OFF - 3	OFF - 4	OFF - 5	YES	YES
0.75 second Ramp 1	OFF - 3	ON - 4	OFF - 5	YES	YES
1.50 second Ramp 2	OFF - 3	OFF - 4	ON - 5	YES	YES
2.25 second Ramp 3	OFF - 3	ON - 4	ON - 5	YES	YES

0-5v Based Voltage Ramp
Works ONLY with 0-5v enable

	DIP SWITCH 3	DIP SWITCH 4	DIP SWITCH 5	GROUND ENABLE	VOLTAGE ENABLE
0-5v - Immediate Ramp	ON - 3	OFF - 4	OFF - 5	NO	YES
Base enable v + 0.4v Ramp	ON - 3	ON - 4	OFF - 5	NO	YES
Base enable v + 0.8v Ramp	ON - 3	OFF - 4	ON - 5	NO	YES
Base enable v + 1.2v Ramp	ON - 3	ON - 4	ON - 5	NO	YES



PM-2999

Optional
Remote Voltage Knob
• Overrides front panel voltage setting when connected to the harness.

TROUBLESHOOTING POWERMAX

- Power Issue -> LED is OFF and the unit does not Output Voltage

- 1) Is the Key turned ON?
 - Check the fuse(s) for the fuel pump
- 2) Blown Fuse (check the 40amp Heavy Gauge Red Wire Input Fuse)
- 3) The Black Ground wire is not connected to Chassis Ground.
- 4) Verify that the two pin connector is plugged into each PowerMAX.

- 0-5v Enable Issue -> LED is ON and the unit does not ENABLE (LED does not blink)

- Verify that the pedal position wire harness is connected to the pedal sensor and the oe harness.
- Verify that the pedal position wire harness is connected to the PowerMAX six pin control harness.
- Check for a broken wire in the six pin control wire harness.
- Verify the Pedal Position setup in steps 12-14.

- Voltage Boosting Output Issue -> LED is Blinking Slowly and the unit is not putting out the expected voltage (white wire).

- 1) Check to see if a manual over-ride knob is plugged into the unit (PM-2999 four pin flat connector)
 - When connected the manual over-ride knob “over-rides” the saved internal settings of the unit.
- 2) The unit output voltage has never been programmed or was programmed with a LOW value.
 - Set Dip Switch 1 on, wait two seconds
 - Rotate the Adjust Output Voltage Pot to the FULL Clockwise position (100%)
 - Verify that the output voltage matches the range dip switch setting. (See tables on Page 10).

- Voltage Boosting Ramp In / Ramp Out Issue -> 0-5v Based Ramp: Fuel Pressure has a spike.

- 1) Turn Dip Switch 1 ON and verify/adjust the Time Ramp Rate to it's maximum ramp.
(Max Ramp = Dip Switch 3 - ON, Dip Switch 4 - ON, Dip Switch 5 - ON). Test to see if the issue still occurs.

- 0-5v Enable Issue -> LED is blinking slowly and unit is not putting out the expected voltage on the white wire.

- 1) Turn Dip Switch 1 on and verify that both the range dip switch setting and the Adjust Output Voltage Pot are set correctly and then retest.

- Can PowerMAX be enabled by BOTH Ground and 0-5v at the same time? Yes -> PowerMAX will continue to Boost Voltage until both inputs have stopped enabling the device. It is simple to test to see if the unit boosts voltage when you use one enable. • The Plug & Play PowerMAX units are designed to enable via the Pedal Position Sensor.

- What if I enable PowerMAX via Ground but have it configured to a Voltage Ramp?

PowerMAX automatically defaults all ground enable events to use Time Based Voltage Ramps.

- What if I use a non-GM unit on a GM -> Worst case scenario is a dead battery. Please use a GM unit for a GM vehicle.

Several different PowerMAX versions are available:

FuelMAX, SparkMAX, FanMAX & IntercoolMAX

The product guides below detail the different types of devices and their functions.

Product Guide • FuelMAX V2

	SINGLE PUMP	DUAL PUMP	PLUG & PLAY	SETUP FOR GM	ACTIVATE GND OR 0-5v	ACTIVATE INT BOOST	REMOTE KNOB OPTION
PM-2000	X				X		X
PM-2000-GM	X			X	X		X
PM-2000-PPM11	X		X		X		X
PM-2009-BOOST	X					X	
PM-2009-BOOST-GM	X			X		X	
PM-2009-BOOST-PPM11	X		X			X	
PM-2020		X			X		X
PM-2020-PPS11		X	X		X		X
PM-2029-BOOST		X				X	
PM-2029-BOOST-PPS11		X	X			X	

Product Guide • SparkMAX V2

	SPLICE IN DESIGN	SINGLE OUTPUT	OUTPUT 25v	OUTPUT 31v	ACTIVATE GND OR 0-5v	ACTIVATE VIA BOOST	REMOTE KNOB OPTION
PM-2100	X	X	X		X		X
PM-2100-R31	X	X		X	X		X
PM-2109-BOOST	X	X	X			X	
PM-2109-BOOST-R31	X	X		X		X	

Product Guide • FanMAX 2200 V2 & IntercoolMAX V2

	SPLICE IN DESIGN	SINGLE OUTPUT	DUAL OUTPUT	OUTPUT 15v	OUTPUT 16v	PLUG & PLAY	REMOTE KNOB OPTION
PM-2200	X	X		X			
PM-2220	X		X	X			
PM-2300	X	X			X		
PM-2300-PPS13		X			X	X	

ABOUT JMS CHIP & PERFORMANCE

For more than 20 years, JMS Chip & Performance has been an industry leader in late model domestic and import vehicle tuning. JMS brand electronics components are some of the most technologically advanced in the automotive industry and feature innovative high quality engineering, materials and workmanship. The JMS technical center in Lucedale, MS is one of North America's premier automotive and motorcycle tuning, manufacturing, and turn key automobile development facilities, producing numerous custom high performance vehicles each year. JMS is also a pioneer in domestic vehicle calibrations and highly regarded as a foremost expert in Ford, GM and Chrysler powertrain and drivetrain systems.



LIGHT VEHICLE ASSEMBLY

JMS produces countless custom or specialty vehicles ranging from contemporary late model domestic performance cars to full blown turn key race cars, each year. Our teams of professionals are experts in supercharging, turbocharging, engine assembly, chassis production, suspension upgrades, and specialty equipment integration.



JMS TECHNICAL CENTER • LUCEDALE, MS

A state of the art facility that integrates custom and specialty vehicle manufacturing, race car production, electronics development and manufacturing, custom tuning and vehicle calibrations engineering, prototype development, and after-market component sales and distribution.



CUSTOM ECU CALIBRATION ENGINEERING

Since 1993, JMS has been a pioneer and industry-leader in Ford vehicle calibrations and instrumental in helping to develop the modern custom tuning aftermarket. Our tech center's tuning facility features two chassis dynamometers specifically for car and truck calibrations and engineering, and one motorcycle dyno to service the growing powersports market.

JMS POLICIES

HOW TO ORDER

Retail orders for JMS products can be placed through our website at: www.jmschip.com or by calling us factory direct at (601) 766-9424. JMS products can also be purchased through our network of warehouse distributors, dealers, jobbers, and installers. To locate a wholesaler or installer in your area, please contact us or use the dealer locator on our website.

TERMS OF SALE

JMS product orders are subject to our wholesale trade terms and conditions, which are located in the applicable price guide.

SHIPPING AND HANDLING

JMS products are shipped F.O.B. Lucedale, MS via UPS or common freight carrier, and are subject to applicable shipping terms and charges. JMS does maintain a freight policy for warehouse distribution based on a minimum order qualification. Overseas order shipping via a common freight forwarding company or broker are the responsibility of the customer.

PRICING

JMS maintains a *minimum advertised pricing policy* to protect product value, and maintain consistent and fair distribution or retail pricing points. JMS places high value on its brand and product integrity.

NON-JMS BRAND PARTS

Aftermarket parts purchased from JMS are covered under the manufacturer's warranty, and are not covered under the JMS manufactured products warranty.

OFF-ROAD NOTICE AND TERMS & CONDITIONS

JMS products are designed for Off-Road or Racing use only. JMS terms and conditions including: Pricing, specifications, warranty, and availability are subject to change without notice. Compliance with all federal, government, provincial, state or local laws are the responsibility of the customer or end-user. All claims of product performance are based on controlled testing conditions and real-time data, and results may vary based on your application or use. JMS shall not be liable for any fines or violations resulting from product use or installation.

SERVICE OR REPAIR:

Please contact JMS @ 601-766-9424 for a Return Authorization. All service returns should be sent freight pre-paid to: JMS SERVICE, 3247 HWY 63 S, Lucedale, MS 39452. The Return Authorization Number should be clearly written on the outside of the box, and in a letter that is included in the box. The letter should also list your contact phone number and a clear explanation of the exact problem.

JMS WARRANTY & CONTACT INFORMATION

JMS WARRANTS TO THE ORIGINAL PURCHASER THE FOLLOWING:

Your JMS Product will be free from defects in materials and workmanship for a period of twelve months from the original purchase date. The warranty only covers the product itself and not the cost of removal and re-installation of the product. JMS may extend the limited warranty on a case by case basis, based on the circumstances of the warranty claim. JMS products are designed exclusively for use in racing applications. JMS products that are not installed according to the supplied instructions, may not be covered by warranty.

SPECIFIC CONDITIONS THAT WILL VOID THE PRODUCT WARRANTY:

If the product case has been opened or the product has been modified or repaired.
If the product was not installed or used correctly.
If the product has been tampered with by: negligence, misuse or accident.
If the product is returned without explanation of the problem or Return Authorization.

CONTACT JMS @ 601-766-9424 FOR A RETURN AUTHORIZATION NUMBER:

All warranty returns should be returned freight pre-paid and should include inside of the box: Proof of Purchase and a Letter that contains both the Return Authorization Number and a Clear Explanation of the EXACT problem. The Return Authorization Number should also be clearly written on the outside of the box.

SEND ALL RETURNS TO:

JMS Returns, 3247 HWY 63 S, Lucedale, MS 39452

JMS Chip & Performance LLC is not liable for any and all consequential damages arising from the breach of any implied or written warranty in regards to the sale of this product, in excess of the purchase price.

TECHNICAL SUPPORT & CONTACT INFORMATION:

JMS 3247 Hwy 63 S, Lucedale, MS 39452

601-766-9424

Technical Support Hours: Monday - Friday 9:00am - 5:00pm (Central Standard Time)

CONFIGURATION AND INSTALLATION VIDEOS ARE AVAILABLE ONLINE: WWW.YOUTUBE.COM/JMSCHIP

If you have any questions, please contact JMS technical support via email: jms@jmschip.com

Follow JMS on FaceBook: WWW.FACEBOOK.COM/jmschips

JMS on YouTube: WWW.YOUTUBE.COM/jmschip

JMS Website: WWW.JMSCHIP.COM

JMS on Instagram: @jmschip

