


15006 / RRH15006**99-07 CHEV/GMC 1500 / 2500LD****10/9/2007**

**GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 12,000 LBS. TRAILER WEIGHT & 1,200 LBS. TONGUE WEIGHT.
GROSS LOAD CAPACITY WHEN USED AS A WEIGHT DISTRIBUTION HITCH: 14,000 LBS. TRAILER WEIGHT & 1,400 LBS. TONGUE WEIGHT**

*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	6	9/16	LOCK WASHER
2	6	CM-SP25	.250 x 1.38 x 1.50" ROUND HOLE SPACER
3	4	9/16-12 x 2	HEX BOLT
4	4	9/16 - 12	HEX NUT
5	4	M14-2 x 40mm LG.	HEX BOLT
6	2	ANSI B 18.2.4.4 M - M14 x 2	Hex Flange Nut
7	6	9_16 WASHER	FLAT WASHER

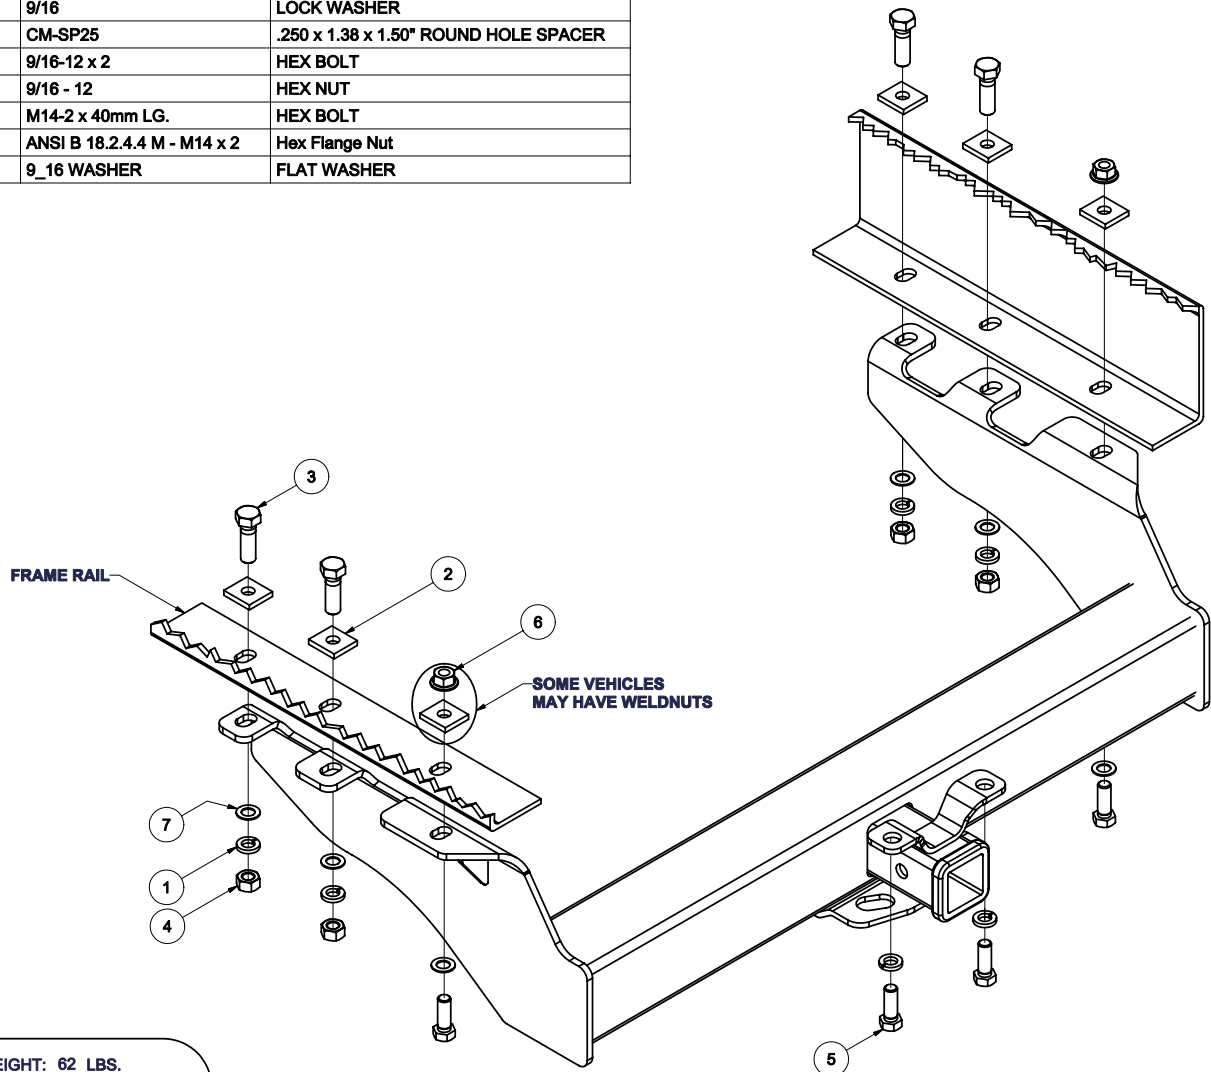

HITCH WEIGHT: 62 LBS.

INSTALL TIME: 45 MINUTES

INSTALL NOTES:

MUST RELOCATE GROUND WIRE

INSTALLATION STEPS

- 1) If the vehicle is equipped with a factory step bumper, remove and discard the 14 mm hex bolt from each end of the frame.
- 2) Remove and relocate the ground wire and ground wire bolt on the driver's side frame rail.
- 3) Raise the hitch into position and install the fasteners as shown.
- 4) Torque all fasteners to 110 lb-ft.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.