

15514

1999-CURRENT F-250/350 SUPER DUTY

2/24/2011

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 15,000 LBS. TRAILER WEIGHT & 1,500 LBS. TONGUE WEIGHT.
 GROSS LOAD CAPACITY WHEN USED AS A WEIGHT DISTRIBUTION HITCH: 16,000 LBS. TRAILER WEIGHT & 1,600 LBS. TONGUE WEIGHT

*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813


Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	8	1/2-13	HEX NUT
2	8	1/2"	LOCK WASHER
3	8	1/2-13 x 1 3/4	HEX BOLT
4	16	CM-SP22	.250 x 1.50 x 1.50" ROUND HOLE SPACER

TOOLS REQUIRED

SOCKET WRENCH

3/4" SOCKET

TORQUE WRENCH

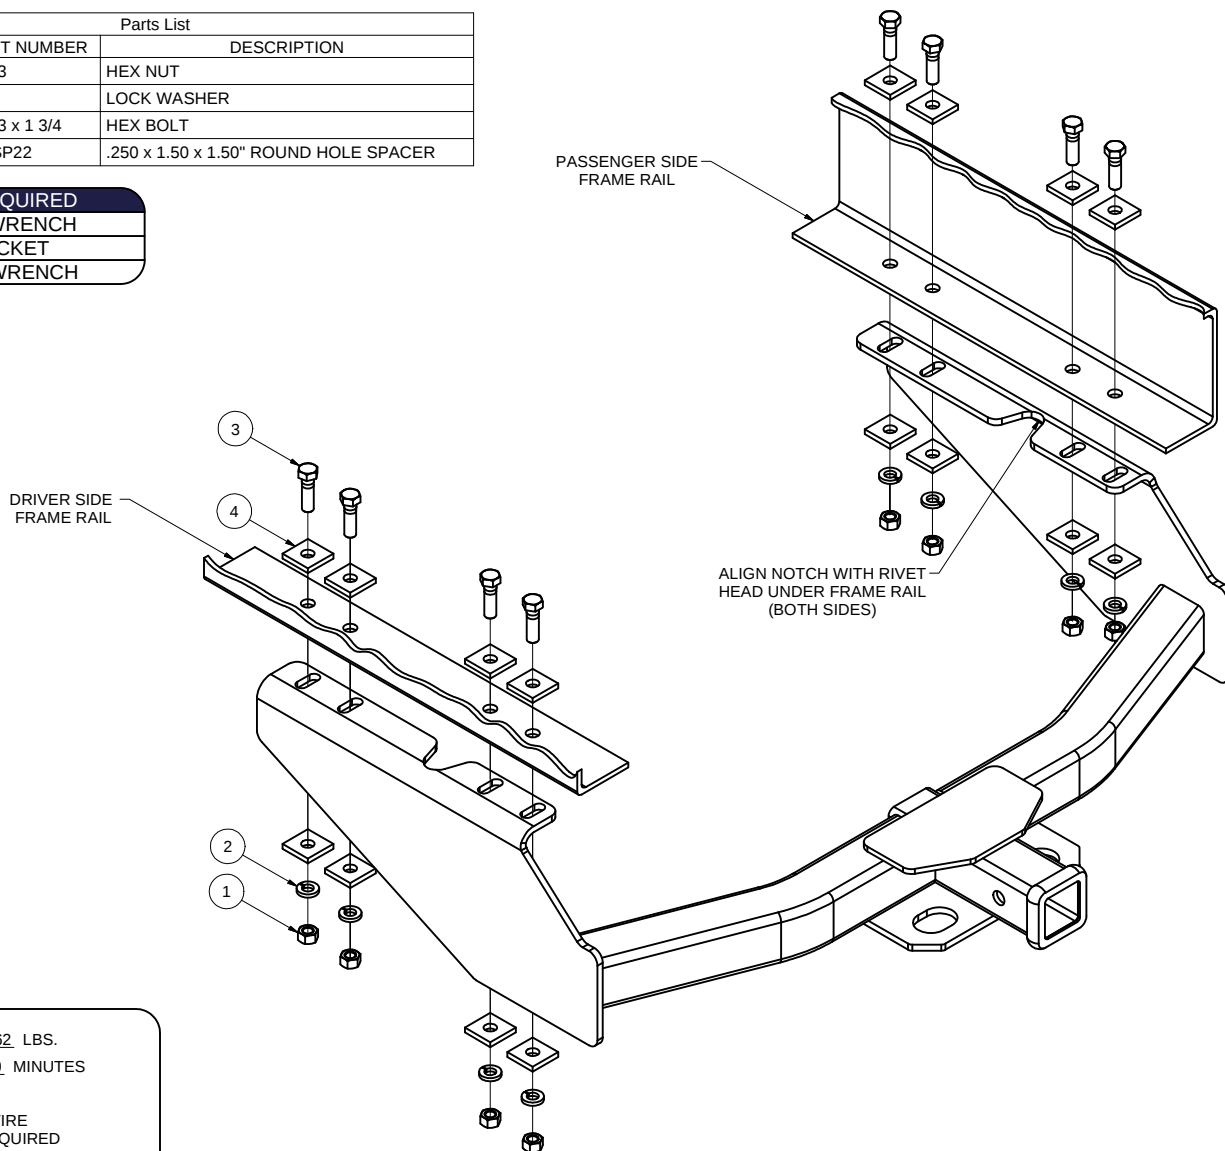

HITCH WEIGHT: 62 LBS.

INSTALL TIME: 30 MINUTES

INSTALL NOTES:

- LOWER SPARE TIRE
- NO DRILLING REQUIRED

INSTALLATION STEPS

1. Lower spare tire for ease of installation.
2. Raise hitch into position, aligning notches in side plates with rivets under frame rails.
3. Secure hitch with hardware through existing holes, as shown.
4. Torque 1/2" hardware to 75 lb-ft.
5. Raise spare tire and push tire against back side of hitch.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.