

15522

2007 TO PRESENT CHEVROLET/GMC 1500 NEW BODY
99-07 CHEVROLET/GMC 1500 & 2500 LT DUTY CLASSIC W/FACTORY BUMPER

5/6/2009



GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 15,000 LBS. TRAILER WEIGHT & 1,500 LBS. TONGUE WEIGHT.
GROSS LOAD CAPACITY WHEN USED AS A WEIGHT DISTRIBUTION HITCH: 16,000 LBS. TRAILER WEIGHT & 1,600 LBS. TONGUE WEIGHT

*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813

		Parts List	
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	1/2-13 x 1 3/4	HEX BOLT
2	2	CM-SP34	.188 x 1.50 x 3.00" ROUND HOLE SPACER
3	4	CM-SP50	.250 x 1.00 x 1.50" ROUND HOLE SPACER
4	4	1/2"	LOCK WASHER
5	4	1/2-13	HEX NUT
6	2	CM-SP22	.250 x 1.50 x 1.50" ROUND HOLE SPACER

TOOLS REQUIRED	
RATCHET	
TORQUE WRENCH	
12" EXTENSION	
3/4" WRENCH	
3/4" SOCKET	
22mm SOCKET	

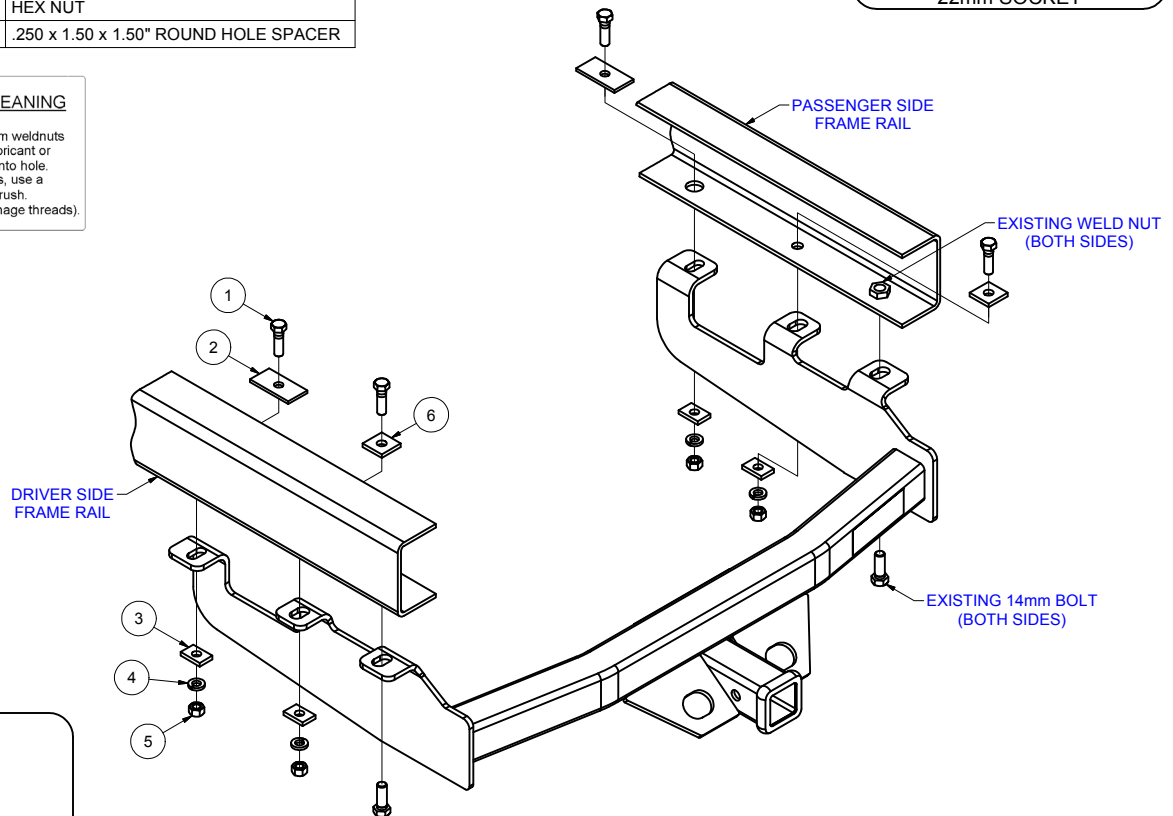

HITCH WEIGHT: 55 LBS.
INSTALL TIME: 30 MINUTES
INSTALL NOTES:
- NO DRILLING REQUIRED
- REMOVE SPARE TIRE

INSTALLATION STEPS

1. Remove spare tire for ease of installation.
2. Remove (1) bumper bracket bolt from both sides of the vehicle. Raise hitch into position by aligning the rearmost holes in the hitch with the holes where the bumper bracket bolts were removed. Secure hitch using existing 14mm bumper bracket bolts
3. Place a 1/2"-13 x 1 3/4" bolt and a CM-SP34 spacer in the forwardmost hole of the frame and hitch (one each side). Secure with a CM-SP50 spacer, lock washer and 1/2-13 hex nut as shown.
4. Place a 1/2"-13 x 1 3/4" bolt and a CM-SP22 spacer in the center hole of the frame and hitch (one each side). Secure with a CM-SP50 spacer, lock washer and 1/2-13 hex nut as shown.
5. Torque all 1/2" hardware to 75 ft-lbs. Torque all 14mm hardware to 100 ft-lbs.
6. Reinstall spare tire removed in step (1).

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.