

15524**2003-2006 CHEVY TAHOE / SUBURBAN AND GMC YUKON / DENALI;
2003-2006 CADILLAC ESCALADE; 2003-2006 CHEVY AVALANCHE****8/4/2009**


**GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 15,000 LBS. TRAILER WEIGHT & 1,500 LBS. TONGUE WEIGHT.
GROSS LOAD CAPACITY WHEN USED AS A WEIGHT DISTRIBUTION HITCH: 16,000 LBS. TRAILER WEIGHT & 1,600 LBS. TONGUE WEIGHT.**

***** DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY. *****

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	1/2-13 x 1 3/4	CARRIAGE BOLT
2	4	CM-SP10	.250 x 1.00 x 2.50" SQUARE HOLE SPACER
3	4	CM-SP25	.250 x 1.38 x 1.50" ROUND HOLE SPACER
4	4	1/2"	LOCK WASHER
5	4	1/2-13	HEX NUT
6	2	1_2 FISHWIRE	1/2" FISHWIRE

TOOLS REQUIRED
3/4" SOCKET
22MM SOCKET
12" EXTENSION
RATCHET
TORQUE WRENCH

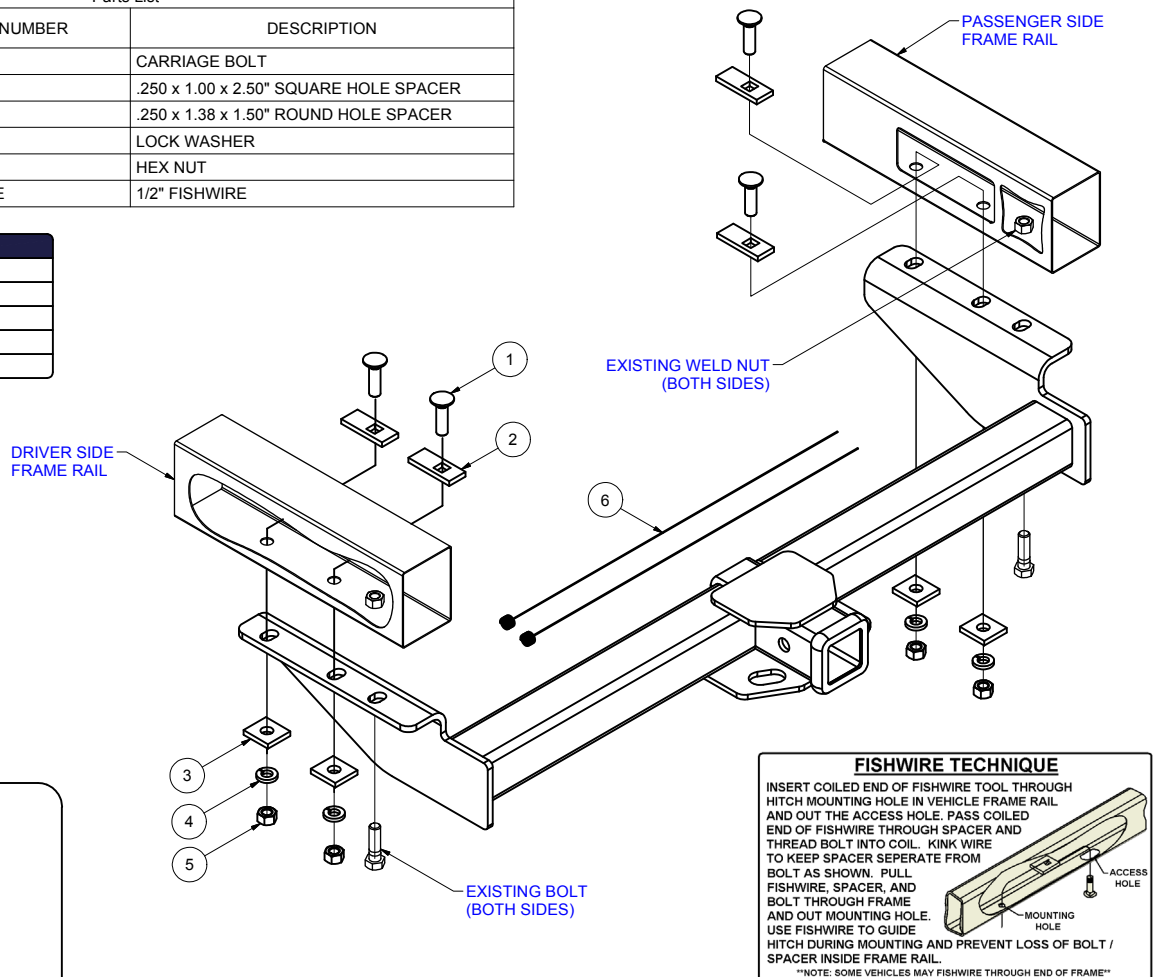

HITCH WEIGHT: 42 LBS.
INSTALL TIME: 30 MINUTES

INSTALL NOTES:

- NO DRILLING REQUIRED
- FISHWIRE HARDWARE
- LOWER SPARE TIRE

INSTALLATION STEPS

1. To ease hitch installation, lower the spare tire.
2. Remove the two bolts (one each side) from the bumper bracket on the bottom of the frame. (NOTE: Do not discard the bolts as they are reinstalled in Step 3.)
3. Raise the hitch into position and reinstall the bolts removed in Step 2.
4. Install 1/2"-13 x 1 3/4" carriage bolts and CM-SP10 spacers through the access windows on the inside of each frame rail into each of the remaining (4) mounting holes in the frame rails and hitch.
5. Secure the hitch with the CM-SP25 spacers, 1/2" lock washers and 1/2" hex nuts as shown.
6. Torque all 1/2" hardware to 75 ft-lbs. Torque all 14mm hardware to 103 ft-lbs.
7. Replace spare tire lowered in Step 1.

**PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS
ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.**

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.