

15602**CHEVY SILVERADO & GMC SIERRA / 2500HD, 3500****6/20/2011**

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 18,000 LBS. TRAILER WEIGHT & 1,800 LBS. TONGUE WEIGHT.
GROSS LOAD CAPACITY WHEN USED AS A WEIGHT DISTRIBUTION HITCH: 18,000 LBS. TRAILER WEIGHT & 1,800 LBS. TONGUE WEIGHT

*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	9_16-12 FLANGE NUT	HEX FLANGE NUT
2	2	CM-SP9	.250 x 1.25 x 2.50" SQUARE HOLE SPACER
3	2	9/16-12 x 1 3/4	HEX BOLT
4	2	M14 - 2 x 45 HEX	HEX BOLT
5	2	9_16 WASHER USS FLAT	FLAT WASHER
6	2	9/16	LOCK WASHER

TOOLS REQUIRED

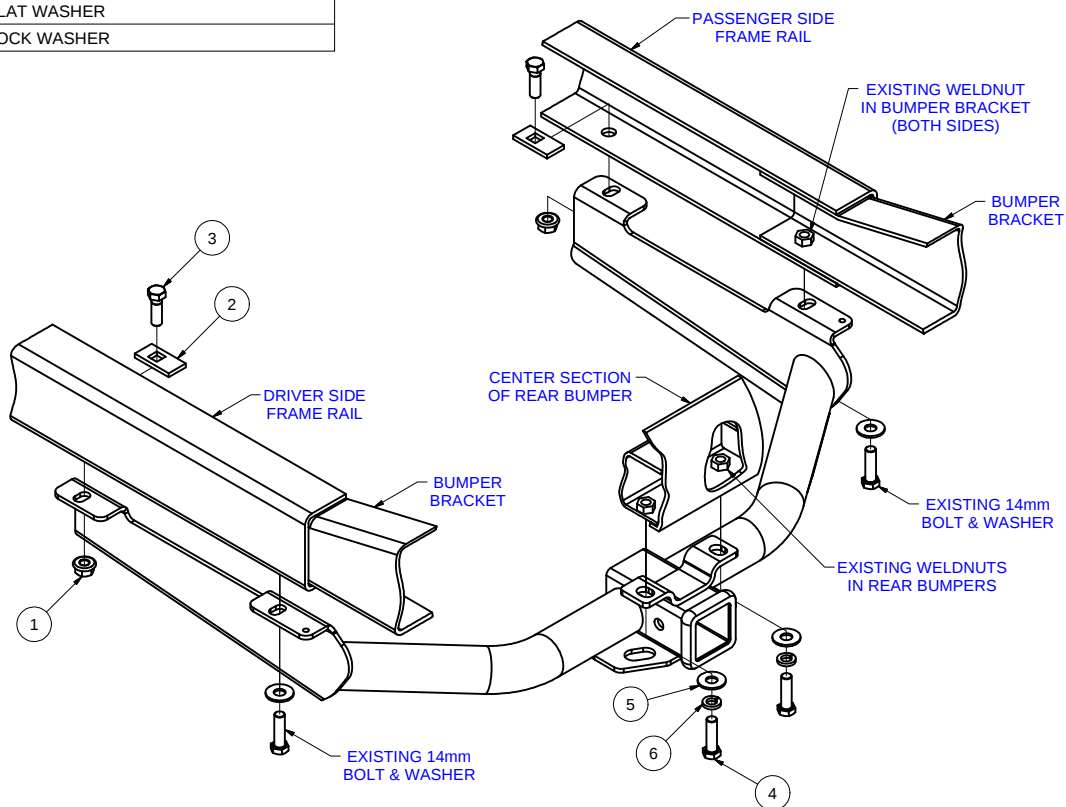

RATCHET WRENCH

TORQUE WRENCH

22mm SOCKET

13/16" SOCKET

13/16" BOXED END WRENCH

HITCH WEIGHT: 41 LBS.INSTALL TIME: 20 MINUTES

INSTALL NOTES:

-NO DRILLING REQUIRED

-REMOVE (2) 14mm BOLTS

INSTALLATION STEPS

- 1) Remove the 14mm Bolts and washers that are located in the rear most bottom section of each frame rail. Save bolts for Step (2).
- 2) Raise hitch into position aligning the open holes in each frame rail where the 14mm bolts were previously removed. Loosely secure hitch in place using 14mm bolts and washers removed in Step (1).
- 3) Place 9/16" bolts and SP-9 spacers over large holes in the truck frame, in line with forward most hole in the hitch frame brackets. Bolt loosely in place with 9/16" flange nut.
- 4) Install 14mm bolts, 9/16" washers, and 9/16" lock washers into existing weldnuts in bumper.
- 5) Torque all 9/16" fasteners to 110 lb-ft and all 14mm fasteners to 94 lb-ft.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.