




Accessory Gas Door Guard

INSTRUCTIONS

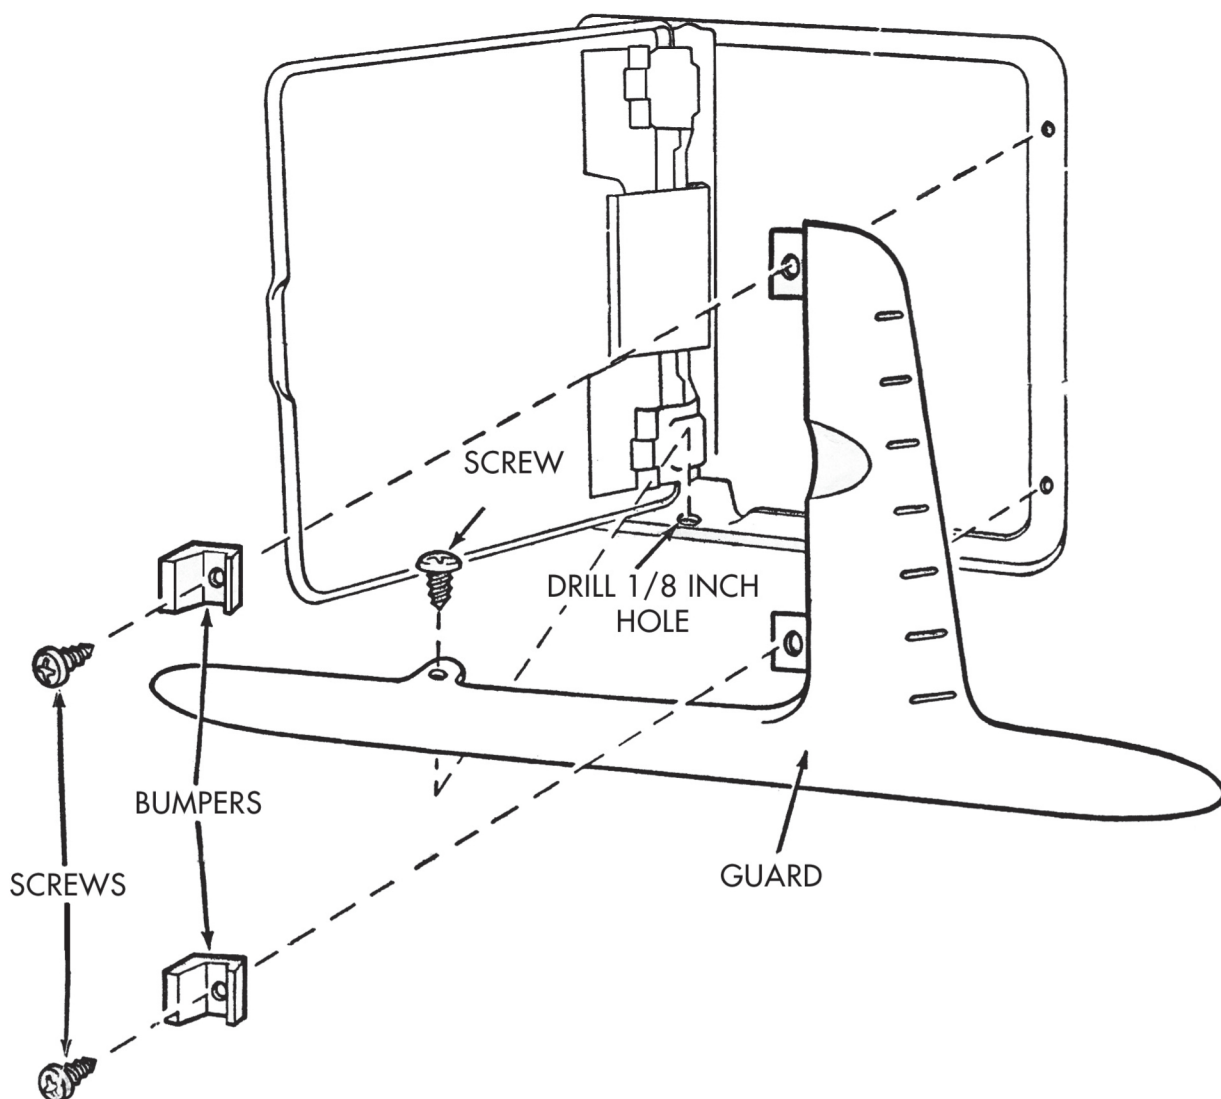

1. Remove the two screws and rubber bumpers from the rear ledge of the door opening.
2. Place the guard in the installed position and attach the bumpers and screws.
3. With the lower leg of the guard flush against the quarter panel, use the hole in the lower tab as a template to drill 1/8 inch hole.
4. Complete installation with the tapping screw provided.