


17447

Installing a high performance exhaust system has never been easier. These new direct fit systems have been designed to follow OEM routing and mounting points exactly. You don't have to cut or weld brackets and pipes to muffler bodies.

Now you can "bolt-on" a complete DynoMax high performance system — featuring the power boosting Super Turbo Muffler.

FORD F SERIES — DUAL TAIL PIPES

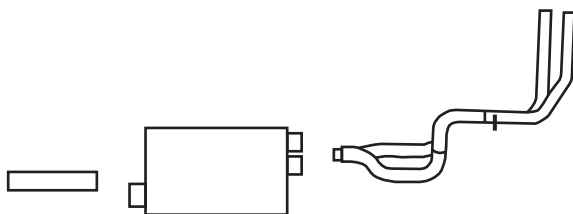

KIT CONTAINS:

- (1) 17786 MUFFLER
- (1) 44291 PIPE
- (1) 44292 TAIL PIPE
- (1) 44293 TAIL PIPE
- (1) 35163 BRACKET
- (4) 2¼" CLAMPS
- (1) 2½" CLAMP

APPLICATION DATA

Year	Cyl.	Model & Engine	Int. Pipe	Muffler	Tail Pipe	Clamps
1987-96	6	F150/250 w/4.9L (300) - 116", 133" 138" WB	44291 ¹ ◆	17786 ²	44292 44293	2¼ (4), 2½ (1)
1987-96	6	F150/250 w/5.0L (302) - 116", 133" 138" WB	44291 ¹ ◆	17786 ²	44292 44293	2¼ (4), 2½ (1)
1987-97	6	F150/250 w/5.8L (351) - 116", 133" 138" WB w/Dual Tail Pipes (Exc. Flairside) (Under 8500 GVW)	44291 ¹ ◆	17786 ³	44292 44293	2¼ (4), 2½ (1)

◆ Cut Outlet end to required length, if needed.

¹ Models w/133" WB may need 41966 (2½" ID to 2½" OD) Connector Pipe.

² 35183 Bracket required.

³ Required Bracket for 1987-93 use 35163.