



Audio System Upgrade Package
2005-2008 Dodge Magnum
2005-2008 Chrysler 300
2005-2008 Dodge Charger
2008-2009 Dodge Challenger

Installation Instructions

TOOLS REQUIRED:

***Phillips Screwdriver *Panel Removal Tool *Pick Tool**

CONTENTS:

2EA. 6X9 TWO WAY SPEAKERS WITH ADAPTORS
1EA. INSTRUCTIONS

P/N 05030281AA
P/N RBI05LXFRONT

1. Using a pick tool pry open the screw covers behind the interior door release lever and below the arm rest and remove the screws. Fig. 1
2. Remove the four screws securing the door panel along the bottom. Fig. 1
3. Using the end of a Phillips screwdriver gently depress the center pin of the three plastic retainers securing the door panel. The center pin of the plastic retainer should depress approximately 1/8" and allow the retainer to be removed from the door panel. The two uppermost retainers do not need to be removed in order to remove the door panel. Fig. 2



Fig. 1



Fig. 2



Audio System Upgrade Package
2005-2008 Dodge Magnum
2005-2008 Chrysler 300
2005-2008 Dodge Charger
2008-2009 Dodge Challenger

Installation Instructions

4. Using a panel removal tool gently pry the door panel away from the door.
5. Disconnect the door handle linkage by rotating the blue plastic latch and pulling the linkage rod loose. Fig. 3
6. Disconnect door wiring and set door panel aside.
7. Remove the existing speaker and its mounting adapter. The replacement speakers come with new adapters to allow more mounting depth and clearance of the speaker magnet from components inside the door. Fig. 4

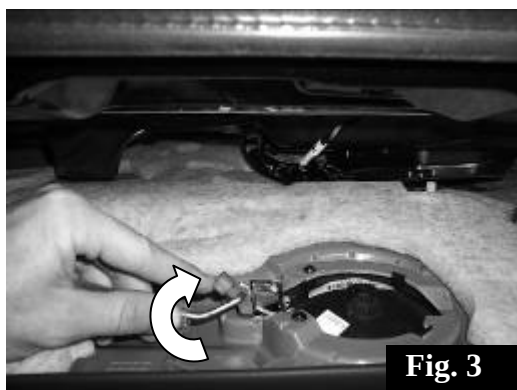


Fig. 3



Fig. 4

8. Connect the speaker wiring and install the upgrade speaker. Fig. 5
9. Reset the plastic door panel retainers by pushing the center pin back through the retainer two clicks. The retainer can now be reinstalled in the door panel. When you have the retainer in place press the center pin in one click to lock it into place and secure the door panel. Fig. 6



Fig. 5



Fig. 6

10. Replace all previously removed parts in reverse order.