


DiabloSport Catch Can Installation Instructions

Installation for SRT-4

Warning: This installation should be performed while your vehicle is off and has not been operated for at least several hours to avoid coming in contact with any hot parts.

This catch can mounts on the engine mount approximately as shown. To install the assembled catch can, place the mounting bracket onto the engine mount as shown. Place catch can onto bracket and secure screw. Slide the supplied hoses onto the barbed fittings of the DiabloSport catch can. Lay out the hose to achieve optimum routing (note inlet and outlet to the DiabloSport catch can are interchangeable). Trim hoses if required. Connect hose to the engine. Installation is now complete.

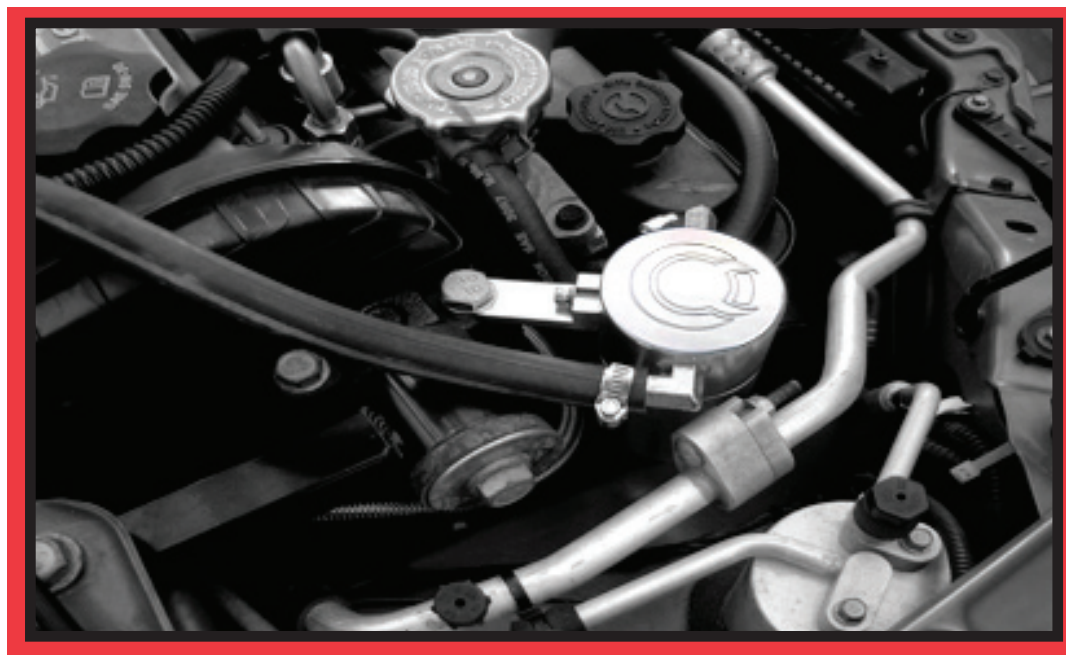

SRT-4

Note: For the first month or two check your oil levels frequently. Take note of how fast your can fills up (this will depend on driving style.) Discard oil at a proper discard station and reattach can. Never add oil from catch can back into your engine. After your vehicle's characteristics have been established, check your catch can's oil levels regularly.

Product Liability Statement: By purchasing this product for DiabloSport the customer and DiabloSport Inc. enter into an agreement to which DiabloSport assumes no liability for damages or injury incurred by the buyer or installer of this product. The buyer has complete responsibility for installation, use, and upkeep of this catch can.