


99001-04

GM/MOPAR HALL EFFECT SPEEDOMETER SENDER

Installation:

1. Remove speedometer cable if required
2. Place sender on cable output
3. Tighten Installation Nut.
4. Wire sender as shown or according to your speedometer instructions

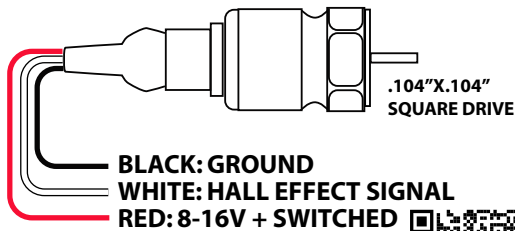

NEW VINTAGE USA
 21840 WYOMING PL STE. A
 OAK PARK, MI 48237
 VOICE: 248.850.5482
 FAX: 248.565.8291


www.newvintageusa.com
service@newvintageusa.com

**99001-04**

GM/MOPAR HALL EFFECT SPEEDOMETER SENDER

Installation:

1. Remove speedometer cable if required
2. Place sender on cable output
3. Tighten Installation Nut.
4. Wire sender as shown or according to your speedometer instructions

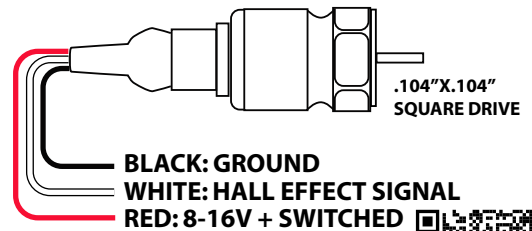

NEW VINTAGE USA
 21840 WYOMING PL STE. A
 OAK PARK, MI 48237
 VOICE: 248.850.5482
 FAX: 248.565.8291


www.newvintageusa.com
service@newvintageusa.com

**99001-04**

GM/MOPAR HALL EFFECT SPEEDOMETER SENDER

Installation:

1. Remove speedometer cable if required
2. Place sender on cable output
3. Tighten Installation Nut.
4. Wire sender as shown or according to your speedometer instructions

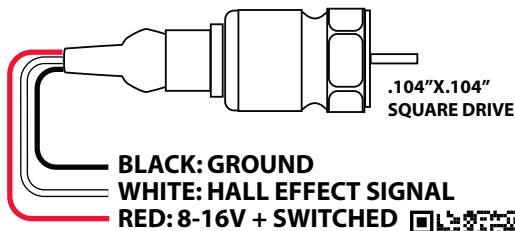

NEW VINTAGE USA
 21840 WYOMING PL STE. A
 OAK PARK, MI 48237
 VOICE: 248.850.5482
 FAX: 248.565.8291


www.newvintageusa.com
service@newvintageusa.com

**99001-04**

GM/MOPAR HALL EFFECT SPEEDOMETER SENDER

Installation:

1. Remove speedometer cable if required
2. Place sender on cable output
3. Tighten Installation Nut.
4. Wire sender as shown or according to your speedometer instructions

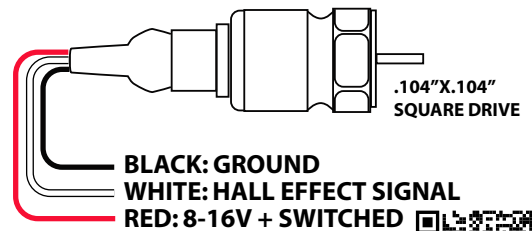

NEW VINTAGE USA
 21840 WYOMING PL STE. A
 OAK PARK, MI 48237
 VOICE: 248.850.5482
 FAX: 248.565.8291


www.newvintageusa.com
service@newvintageusa.com

**99001-04**

GM/MOPAR HALL EFFECT SPEEDOMETER SENDER

Installation:

1. Remove speedometer cable if required
2. Place sender on cable output
3. Tighten Installation Nut.
4. Wire sender as shown or according to your speedometer instructions

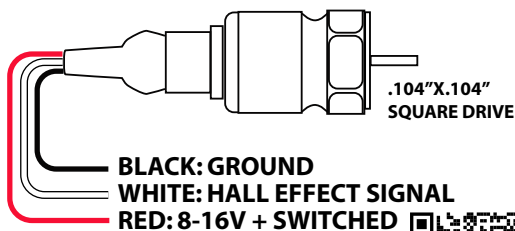

NEW VINTAGE USA
 21840 WYOMING PL STE. A
 OAK PARK, MI 48237
 VOICE: 248.850.5482
 FAX: 248.565.8291


www.newvintageusa.com
service@newvintageusa.com

**99001-04**

GM/MOPAR HALL EFFECT SPEEDOMETER SENDER

Installation:

1. Remove speedometer cable if required
2. Place sender on cable output
3. Tighten Installation Nut.
4. Wire sender as shown or according to your speedometer instructions

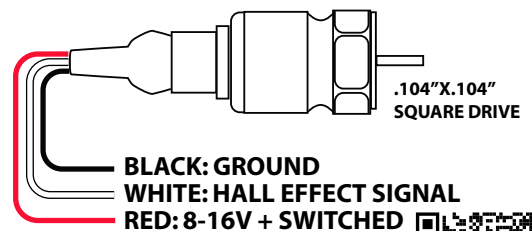

NEW VINTAGE USA
 21840 WYOMING PL STE. A
 OAK PARK, MI 48237
 VOICE: 248.850.5482
 FAX: 248.565.8291

www.newvintageusa.com
service@newvintageusa.com

