

INSTALLATION INSTRUCTIONS



NO POWER TOOLS

- Do not use power tools to install this product.
- No battery operated screw guns.
- The use of power tools during installation may void the product warranty.
- Do not overtighten.



INSTALLATION INSTRUCTIONS

1. Clean and open the hood. Trial fit the Hood Product centrally onto hood. Note existing vacant holes and rubber trim retaining plugs corresponding to the slots in the Hood Product.
2. Remove the rubber trim retaining plugs from the rubber seal, and pull the rubber trim away from the hood in just these small areas, trying NOT TO DAMAGE the double sided tape on the rubber trim. Install the screw plugs into the vacant holes, as shown. Retain rubber seal plugs for possible future use.
3. Re-fit the Hood Product centrally, locating the Hood Product tags between the rubber seal and the hood. Fit the Hood Product tag slot over the collar of the screw plug.
IMPORTANT: Ensure the slot is located centrally over the screw plug collar.

4. Insert the self-tapping screw and washers through the vacant holes in the rubber seal. Position the rubber seal over the Hood Product tags. Maintain thumb pressure against the underside of the Hood Product and rubber seal, insert the screws into the screw plugs. Ensure the Hood Product is centralised on hood then tighten screws. Install the screws and washers through the remaining slots in the Hood Product that are not covered by the rubber seal.
IMPORTANT: Thumb pressure must be maintained to prevent the screw plug from rotating. DO NOT OVERTIGHTEN SCREWS.


To Clean: Use mild detergent and water solution. (Do **NOT** use solvents). Avoid the use of automatic "Brush Style" car washes. When closing the hood, do **NOT** pull on Hood Product.

1

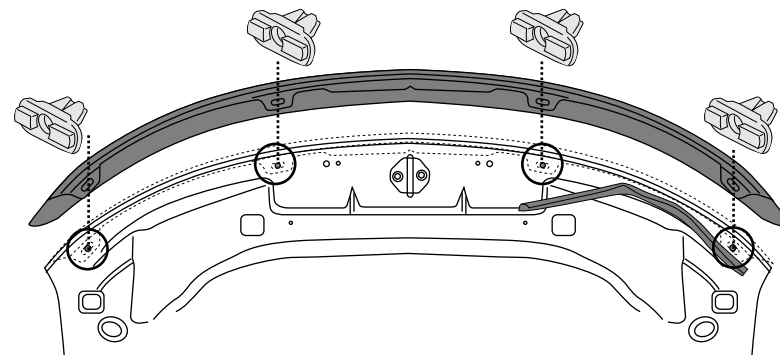


2

SCREW PLUGS

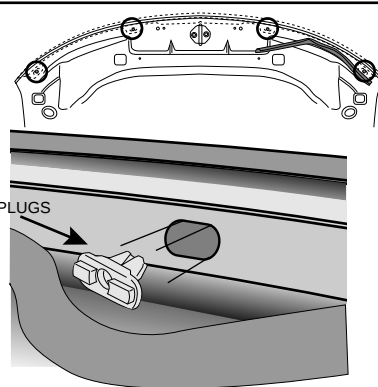

3

HOOD PRODUCT

COLLAR
SCREW PLUGSCENTRE OF
SLOT & SCREW
PLUG COLLAR

SCREW PLUGS

UNDERSIDE VIEW OF HOOD

4

WHERE APPLICABLE

